

NO-A105 049


1905 SOURCE MEASUREMENTS VOLUME 1 THE AUGUST 1905 MLF-5 1/1
MEASUREMENT(U) MICHIGAN UNIV ANN ARBOR COMMUNICATIONS
AND SIGNAL PROCESSING L. K. METZGER ET AL. FEB 86


UNCLASSIFIED

021535-2-H-VOL-1 N00014-04-K-0017

F/G 20/1

NL

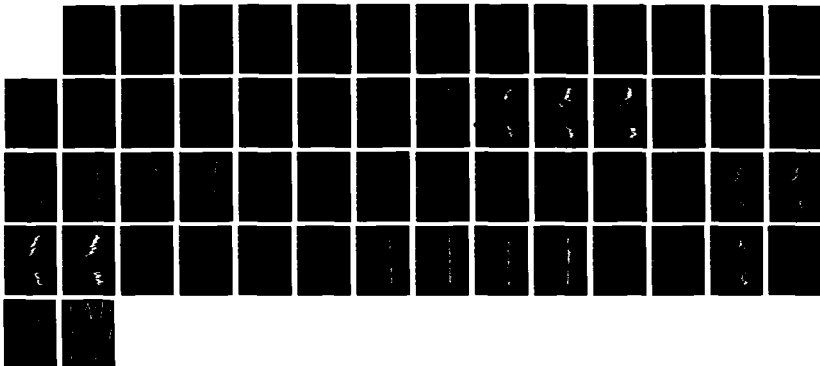

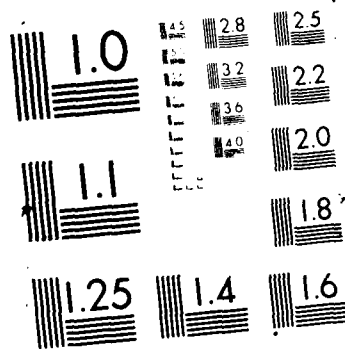

DTIC FILE COPY

(2)

AD-A185 849

1985 SOURCE MEASUREMENTS VOLUME 1: THE AUGUST 1985 HLF-5 MEASUREMENT

**K. Metzger
L.C. Russell
T. Birdsall
G. Bold**

DTIC
ELECTE
OCT 09 1987
S D

COMMUNICATIONS AND SIGNAL PROCESSING LABORATORY

Department of Electrical Engineering and Computer Science

The University of Michigan

Ann Arbor, Michigan 48109

February 1986

Technical Memorandum No. 120-1

Approved for public release; distribution unlimited.

Prepared for

OFFICE OF NAVAL RESEARCH

Department of the Navy

Arlington, Virginia 22217

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

AD-A185849

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS NONE		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) 021535-2-M			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION Communications and Signal Processing Laboratory		6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION Office of Naval Research Code 1125UA		
6c. ADDRESS (City, State, and ZIP Code) The University of Michigan Ann Arbor, MI 48109			7b. ADDRESS (City, State, and ZIP Code) 800 North Quincy Street Arlington, Virginia 22217		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER Contract No. N00014-84-K-0017		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO. NR083-490
			WORK UNIT ACCESSION NO.		
11. TITLE (Include Security Classification) 1985 Source Measurements Volume 1: The August 1985 HLF-5 Measurement					
12. PERSONAL AUTHOR(S) K. Metzger, L. C. Russell, T. Birdsall, G. Bold					
13a. TYPE OF REPORT Tech. Memorandum		13b. TIME COVERED FROM TO	14. DATE OF REPORT (Year, Month, Day) February 1986		15. PAGE COUNT 51
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Acoustic sources Ocean acoustic propagation measurements		
FIELD	GROUP	SUB-GROUP			
19. ABSTRACT (Continue on reverse if necessary and identify by block number) In 1985, Cooley Electronics Laboratory (CEL) in conjunction with the Scripps Institution of Oceanography (SIO) and Woods Hole Oceanographic Institution (WHOI) measured the pulse responses of three acoustic sources used, or to be used, in making ocean acoustic propagation measurements. The three sources were the Hydroacoustics HLF-5 250 Hz source, the Doug Webb 400 Hz (DW-400) source and the Doug Webb 224 Hz (DW-224) source. The basic goal of these measurements was to observe the source outputs at close range in a relatively controlled situation. Of particular interest were: 1) the source pulse response 2) the time delay through the source 3) the presence or absence of spurious pulses ("artifacts")					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL Carol S. Van Aken			22b. TELEPHONE (Include Area Code) (313) 764-5210		22c. OFFICE SYMBOL

1985 Source Measurements

Volume 1: The August 1985 HLF-5 Measurement

K. Metzger
L. Russell
T. Birdsall
G. Bold

Communications and Signal Processing Laboratory
Department of Electrical Engineering and Computer Science
College of Engineering
The University of Michigan
Ann Arbor, Michigan 48109

Technical Memorandum 120-1

February 3, 1986

Handwritten notes and a checkmark are visible in the top right corner, along with a circular stamp. Below these, there is a rectangular box containing the handwritten text "A-1".

1. Introduction

In 1985 Cooley Electronics Laboratory (CEL) in conjunction with the Scripps Institution of Oceanography (SIO) and Woods Hole Oceanographic Institution (WHOI) measured the pulse responses of three acoustic sources used, or to be used, in making ocean acoustic propagation measurements. The three sources were the Hydroacoustics HLF-5 250 Hz source, the Doug Webb 400 Hz (DW-400) source and the Doug Webb 224 Hz (DW-224) source. Both of the Webb sources have been used in past measurements. The Hydroacoustics source is a new source design and was undergoing acceptance testing. The HLF-5 was tested in April and August at Navy's Lake Seneca test facility and in October at sea off of San Diego. The two Webb sources were tested in August at Lake Seneca.

The basic goal of these measurements was to observe the source outputs at close range in a relatively controlled situation. Of particular interest were:

- 1) the source pulse response
- 2) the time delay through the source
- 3) the presence or absence of spurious pulses ("artifacts")

The results of these tests are contained in four separate volumes sharing a common introduction (this one).

At Lake Seneca the basic test procedure was as follows:

1. A BCSG-80 signal source was used to generate a sinusoidal carrier phase modulated using a binary linear maximal sequence to select phases. The specific sequence and the number of carrier cycles per modulation digit were varied depending on the measurement.
2. For the case of the HLF-5, the BCSG-80 output was fed to a Krohn-Hite power amplifier which was used to drive the source. Input pulse measurements were made at the Krohn-Hite output.

For the DW sources, the BCSG-80 output was fed to a special clipper/drive box (supplied by WHOI) with the output of this box feeding the source electronics. The input pulse measurements were made at the BCSG-80 output.

3. The source output was monitored using a hydrophone suspended some distance away from the source. The output of this hydrophone was amplified and low pass filtered (1.5 KHz 2-pole Butterworth) before being fed to CEL's processing equipment.
4. The input waveform was sampled using a 12-bit A/D converter that was configured so that it emulated the

operation of one of CEL's beamformer outputs. This allowed it to directly feed the input of a one channel complex demodulator.

5. For the HLF-5 and DW-400 sources, demodulates were formed over half carrier cycles. For the DW-224 source they were formed over full carrier cycles.
6. Demodulates were circulating summed using a buffer length corresponding to the length of modulating sequence being used multiplied by the number of samples per digit being taken.
7. Once a specified number of periods had been summed, the circulating sum was written onto cartridge tape for later processing and analysis.
8. The circulating sum was also processed on-line. This processing included pulse compression, generation of a display and estimation of the peak signal-to-noise ratio. The processed results were for "real time" use only and were not saved.

The October measurement of the HLF-5 source differed in that the drive waveform was generated by the SIO AVATAR system. The processing steps outlined above starting with step 3 apply.

As with most measurements, various problems arose, decisions (some good, some not so good) had to be made, parameter values were varied, and unexpected results were observed. As a consequence, sometimes parameters that should have been held constant were varied and measurements that should have been included were not. In particular, the number of periods summed together was often varied as the sequence length or digit duration varied. This was easily corrected for as a scale factor change and many of the plots have been suitably normalized in order to facilitate amplitude comparisons. In the case of the DW sources, the duration of the impulse response was much longer than expected and the longest digit durations used were shorter than otherwise would have been desirable. This problem was worked around by using the longest digit duration data to synthesize the results that would have been obtained had longer duration digits been used. The accuracy of this method was checked by using short digit responses to synthesize longer digit responses and then checking these against actual measurements. The long digit predicted and the test prediction results are both included.

The spectra contained in these volumes was formed in the following manner:

1. The circulating sums were read off of tape and processed to remove the effects of the binary sequence used to time spread the signal energy.

2. The location of the digit response peak was determined. This value was used to compute an index value "half way around the circle."
3. Starting at this index, a sufficient number of complex zeros were added to make the number of values equal to an integer power of two.
4. The DFT was formed using an FFT subroutine. The DFT magnitudes were plotted in dB.

The efficacy of this approach was tested by taking the inverse transforms of some data processed using the above procedure and comparing the results against the original data.

The four volumes making up this report are sub-titled:

- Volume 1: The August 1985 HLF-5 Measurement
- Volume 2: The August 1985 DW-400 Measurement
- Volume 3: The August 1985 DW-224 Measurement
- Volume 4: The October 1985 at Sea HLF-5 Measurement

2. Overview of the Data Sets

The August HLF-5 data were divided into three sets. In all cases, the test waveforms were generated using the BCSG-80 generator amplified by a Krohn-Hite amplifier. The reference digit waveforms were measured at the Krohn-Hite output. The carrier frequency was 250 Hz. The modulation angle was $15/64$ th's of a cycle. The source was not pressure compensated. Demodulates were formed over half carrier cycles giving twice the number of samples per digit as there were carrier cycles per digit.

For set one, the source was at a depth of 306 feet and separated from the monitor hydrophone by 40 feet and 2 inches. The phone was placed at a depth corresponding to that of the center of the source. For a 250 Hz carrier and half-cycle demodulates, the separation corresponded to a time delay of approximately 4.3 demodulates (8.6 ms). A 255 digit binary linear maximal sequence was used to produce the modulation. The drive level to the source was set at 7 volts rms.

For set two, the drive level was reduced to 3.5 volts rms. All other parameters were left unchanged.

For set three, the source was lowered to 446 feet and the monitor hydrophone was placed 27 feet higher than the source at a horizontal distance of 40 feet and 2 inches. The source level was left at 3.5 volts rms.

3. Discussion of the Data Sets

3.1 Data Set One

Plots 1 through 4 show the transducer response to digits of length 1, 2, 4 and 8 cycles. Also shown are the associated drive waveforms shifted by 4.3 demodulate times to account for the propagation delay between the source and the monitor hydrophone. The digit responses have been scaled so that they are in correct amplitude relation to each other. The peak value of the eight cycle digit response was plotted as an amplitude of one.

Based on these plots it appears that four cycles of carrier per digit would be a reasonable choice of digit duration. For this case the delay from the leading edge of the drive digit to the peak of the pulse response is approximately 15 ms. There is a small amount of ringing present.

Plots 5 through 8 are of the phases associated with the digit responses presented in plots 1 through 4.

Plots 9 through 12 are of $20\log_{10}$ of the magnitudes of the DFTs of the plot 1 through 4 digit responses. These plots are individually normalized so that the largest spectral line plots at the 0 dB level. The horizontal axis runs from 0 Hz (far left side) through 500 Hz (far right side). Because the number of points per data set doubles

between succeeding plots, the frequency resolution increases correspondingly.

The plots tell us at least the following:

1. Aside from item 3 below, there are no significant anomalous dips or peaks in the HLF-5 transfer function.
2. There was a significant amount of 60 Hz interference present. This was due to ground loop problems.
3. There are spectral lines in the nulls of the transforms of the digit responses. Because these lines only appear in the nulls they are related to the digit duration. After some amount of soul searching, it is felt that these lines are indeed produced by the HLF-5. The reasons for this are: a) they are not present in the spectra formed using the data taken at the drive input to the HLF-5, b) no similar effect was observed for either the DW-400 or DW-224 sources and, c) with some imagination they also appear to be present in the October dip test DFTs.

Plots 13 through 19 are full period dB plots of the digit response of the transducer. A 255 digit sequence was used in all cases. The scale on the x-axis is the same for all plots. The start times of the various runs were not synchronized. These plots are normalized so that the peak amplitude in the 8 cycle per digit response (not included) plots at the zero dB point.

These plots are intended for use in establishing the severity of the "artifact" problem. The "artifact" is caused by an interaction of nonlinearity in the source along with the filtering caused by the source. The artifact arises when energy from one digit interval "rings" over into succeeding digit intervals and interacts in a nonlinear fashion with the succeeding digits' energy. Using the "shift-and-add" property of linear maximal sequences, the locations of the most energetic artifacts can be predicted. The amplitudes of the artifacts generally tend to decrease as the digit duration is increased. This is because proportionally less energy "rings" into adjacent digit intervals. The data used to generate these plots was obtained without any pressure compensation of the source. The data obtained during the October 1985 depth test shows similar artifact performance.

For the 765_8 sequence law (generates a 255 digit sequence), the major artifact locations relative to the main digit response are at digit positions 121, 242, and 179. These locations are listed in order of decreasing expected magnitude. Position 121 corresponds to what is called the 011 artifact, position 242 the 101 artifact, and position 179 the 111 artifact. The 011 artifact is the result of interaction between two adjacent digits, the 101 artifact is

the result of interaction between digits spaced two apart, and the 111 artifact is the result of interaction between three adjacent digits. In the data observed to date, these represent the dominant artifacts.

For the given measurement geometry, the surface bounced arrival followed the main arrival by about 123 ms (61.6 demodulate times).

Plot 13 shows the entire period of the one-cycle per digit response. On the plotted scale, digits are of length two. The main arrival is located at position 82, the surface arrival is not obvious, and there are two strong spurious responses corresponding to artifacts 011 and 111. The 101 artifact can be seen just in front of the main arrival but is smaller than expected. The reason for this is not understood, but then again, the mechanism by which these are generated is not understood either.

Plots 14 and 15 show the full period of the two cycles per digit response. The surface arrival can be seen just following the main arrival. The largest artifact is the 011, followed by the 101.

Plots 16 through 19 are of the full period of the four cycles per digit response. The surface bounce is readily visible as is the 011 artifact. The 101 artifact is significantly reduced.

3.2 Data Set Two

Data set two repeated the data set one parameters with the HLF-5 drive level reduced from 7 volts rms to 3.5 volts rms. The peak digit response values (unadjusted to account for varying numbers of circulating sums) for both data sets are listed below.

Cycles/digit	Max Peak (3.5 vrms)	Max Peak (7 vrms)	Ratio
1	1640437	1889155	0.87
2	2103717	2121372	0.99
4	1333409	1543955	0.86
8	680890	800863	0.85

The peak levels did not change in the same proportion as the drive level. At the time the data was taken it was acknowledged that the 7 vrms level was probably overdriving the source so this result is not unexpected.

Plots 20 through 23 are linear plots of driving digit overlayed on plots of the corresponding digit responses. The 4.3 demodulate propagation time has been removed as in plots 1 through 4. There appears to be somewhat more overshoot in these digit responses than was present in the 7 vrms results. However, there are no other major differences in the shapes of the digit responses. The phases associated with the digit responses are plotted in plots 24 through 27. The phases seems to roll faster going across the digit responses than in the 7 vrms cases. This is probably

associated with the additional overshoot.

Plots 28 through 31 are of the DFTs of the digit responses of plots 20 through 23. These differ from their 7 vrms counterparts in that the shoulder area around 375 Hz is higher.

Plots 32 through 38 are full period dB plots of the 3.5 vrms 1, 2, and 4 cycle digit responses. These plots are normalized so that the peak amplitude of the 8 cycle digit response (not included in this set) corresponds to 0 dB.

Plot 32 is of the single cycle digit response. The 011, 101 and 111 artifacts are all clearly visible. Some of the ripples may correspond to other higher order artifacts.

Plots 33 and 34 are of the two cycle digit response. The 011, 101, 111 and 1011 artifacts are easily spotted. The 101 artifact is down from the one cycle level and the 1011 artifact is plainly visible. The surface reflection of the main pulse can clearly be seen.

Plot 35 shows the processed drive waveform used to produce the digit response shown in plot 36. This plot gives some idea of the noise floor of the processing and shows a small amount of tailing off of the digit. This tailing off is most likely due to the use of a long coax cable and has not been seen in direct connection lab tests. A lab test with a long coax cable will be made.

Plots 36 through 39 are of the four cycle digit response. Only the 011 artifact stands out. The surface reflection is very well defined. There appears to be sharp build up of "incoherent" energy just following the main pulse. This energy decays slowly following the pulse. This energy is probably due to volume reverberation.

3.3 Data Set Three


Data set three involved lowering the HLF-5 to a depth of 446 feet with the monitor hydrophone having the same horizontal spacing as in data sets one and two but being positioned 27 feet higher than the HLF-5. Because of the lateness of this run only a few data sets were taken. The results of one of these is presented in plots 40 through 44. These plots are for a two cycle digit.

Plots 40 and 41 are of the magnitude and phase of the region around the main digit. Plot 40 shows both the drive digit and the associated response. The direct path propagation time has been removed.

Plot 42 shows the DFT of the digit response.


Plots 43 and 44 make up the full period dB plot of the magnitude of the digit response. The 011, 101, and 111 artifacts are very apparent as is the surface reflection of the main response.

COOLEY ELECTRONICS LABORATORY
 Digit responses 2nd data set scaled to 8408800
 DATA SET, 1 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 765 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 2 SAMPLES/DATA SET, 510
 LOCATION OF PEAK, 74 MAGNITUDE OF PEAK, 7095903. MEDIAN VALUE, 4902
 200 DATA SET (x2), 2 LOCATION OF PEAK, 92 MAGNITUDE OF PEAK, 1990155.

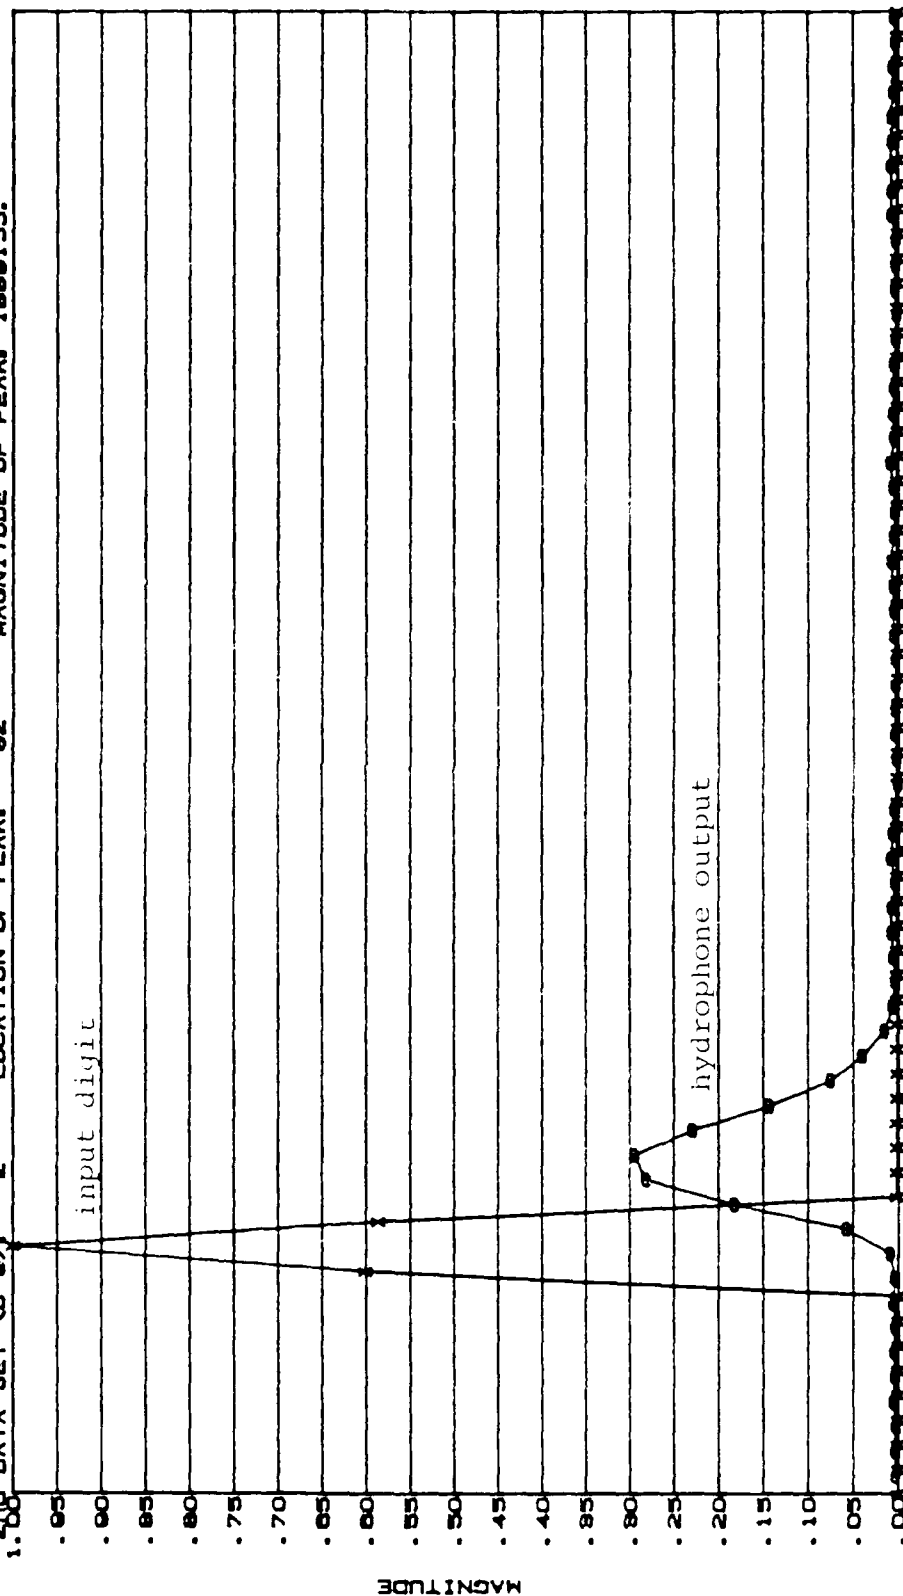


Plot 1. One cycle digit response, direct path delay removed.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 Digit response ... 2nd data set scaled to 3209448
 DATA SET, 3 DATE: 08/28/85 SOURCE: HLF-5
 SEQUENCE LAW, 785 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4 SAMPLES/DATA SET, 1020
 LOCATION OF PEAK, 459 MAGNITUDE OF PEAK, 9547894. MEDIAN VALUE, 2195
 2nd DATA SET (o's), 4 LOCATION OF PEAK, 408 MAGNITUDE OF PEAK, 2121972.

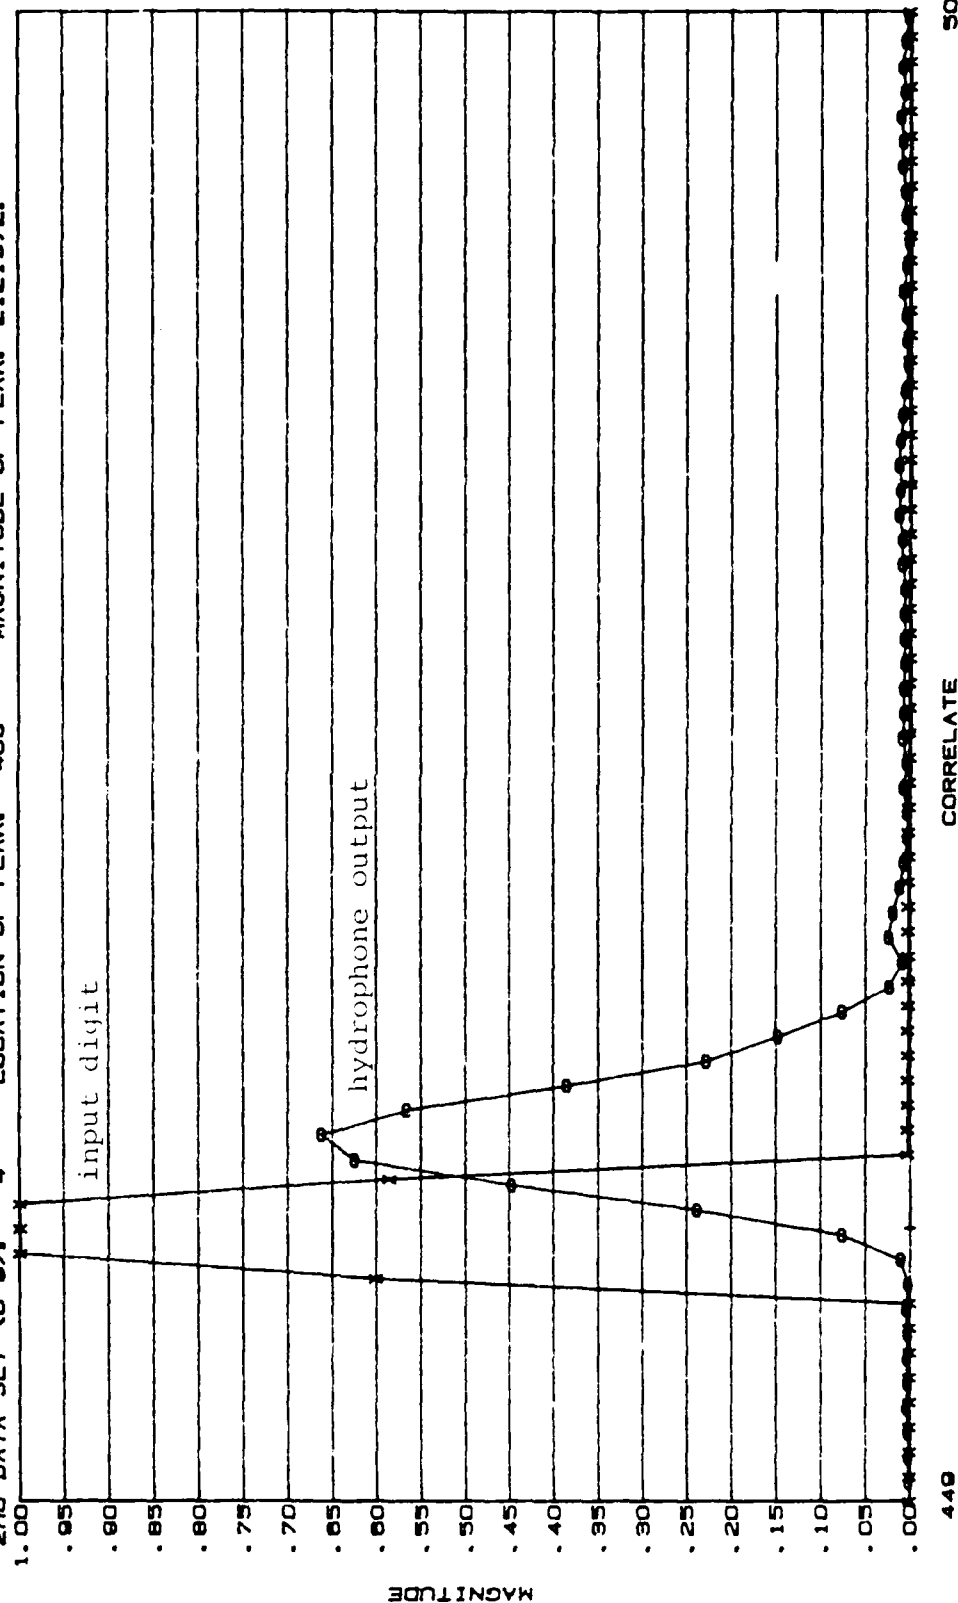

Plot 2. Two cycle digit response, direct path delay removed.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 Digit response 2nd data set scaled to 1801724
 DATA SET, 5 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 SAMPLES/DATA SET, 2040
 LOCATION OF PEAK, 1940 MAGNITUDE OF PEAK, 1774034, MEDIAN VALUE, 1178
 200 DATA SET (0's) LOCATION OF PEAK, 1000 MAGNITUDE OF PEAK, 1549055.

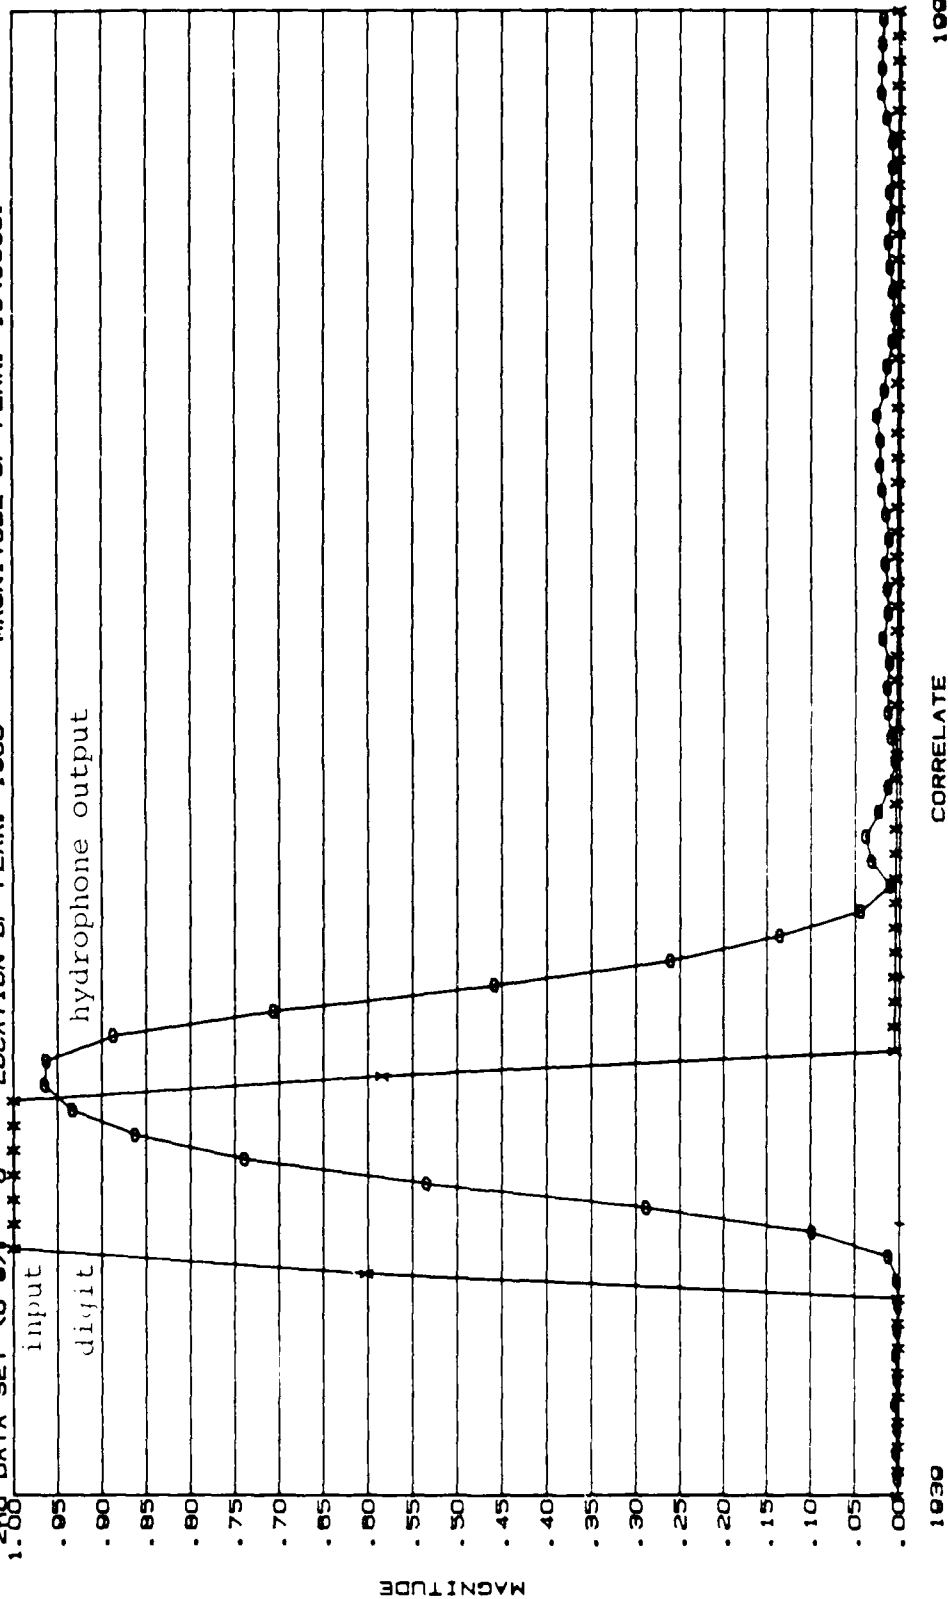


Plot 3. Four cycle digit response, direct path delay removed.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

Digit response

DATA SET, 7 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 763 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 16
 LOCATION OF PEAK, 1020 MAGNITUDE OF PEAK, 887155. MEDIAN VALUE, 800
 200 DATA SET (9.2) LOCATION OF PEAK, 1020 MAGNITUDE OF PEAK, 800869.

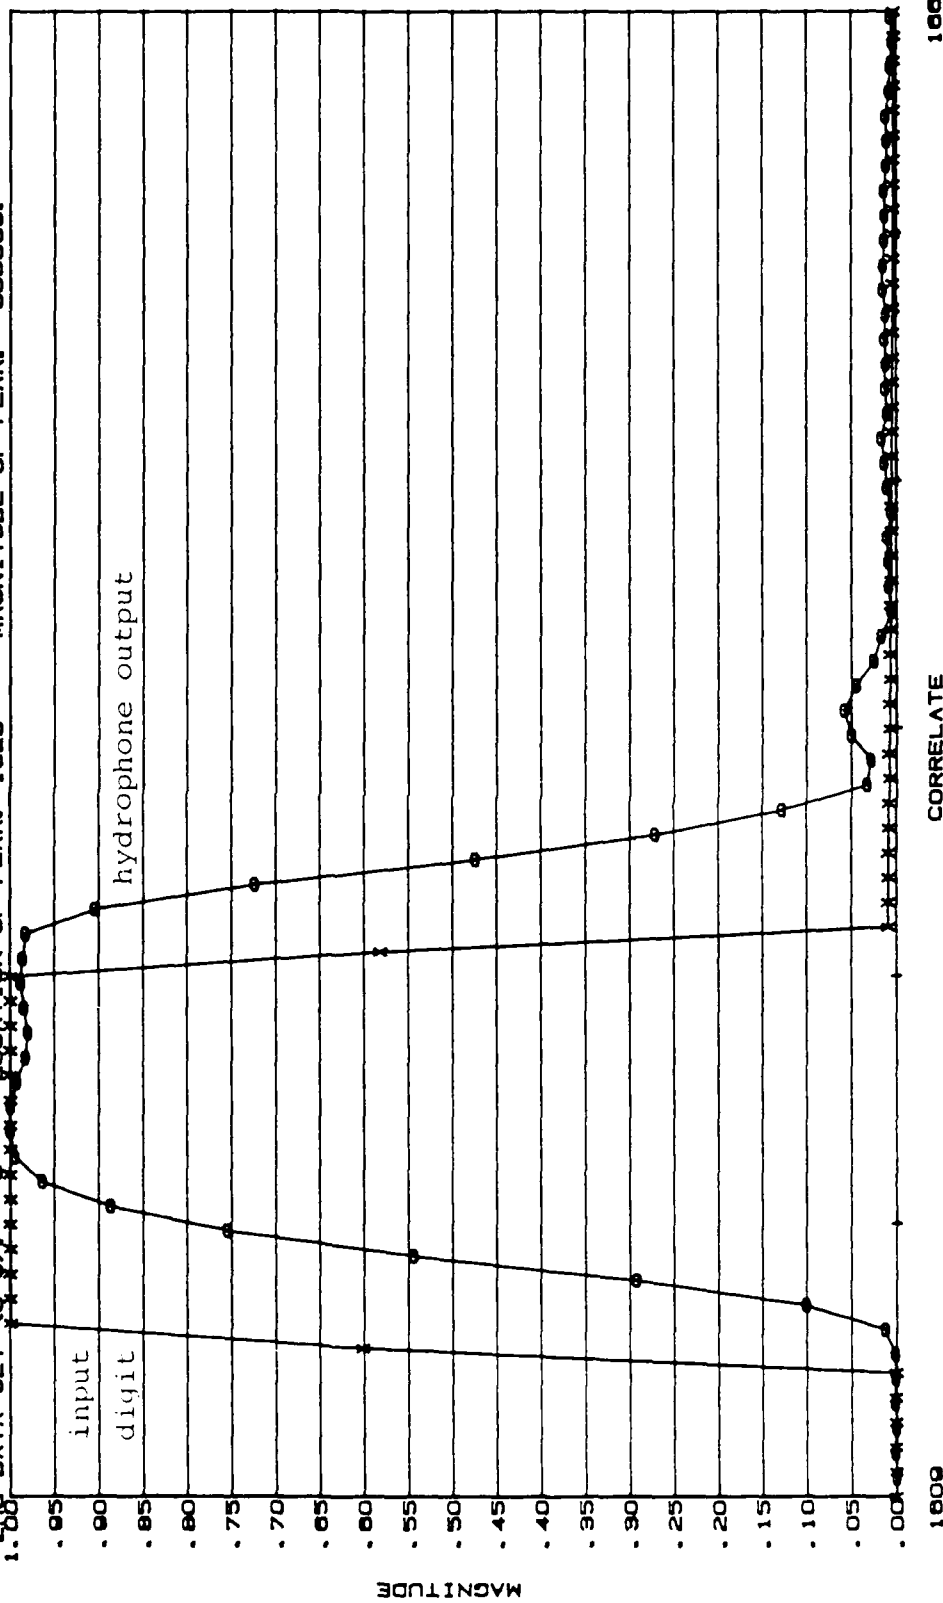


Plot 4. Eight cycle digit response, direct path delay removed.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT


DATA SET: 1 DATE: 08/28/85 SOURCE: HLF-5
 SEQUENCE LAW: 705 FREQUENCY (Hz): 250
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 2 SAMPLES/DATA SET: 510
 LOCATION OF PEAK: 74 MAGNITUDE OF PEAK: 7005905. MEDIAN VALUE: 4902
 2nd DATA SET (o'e): 2 LOCATION OF PEAK: 82 MAGNITUDE OF PEAK: 1080135.

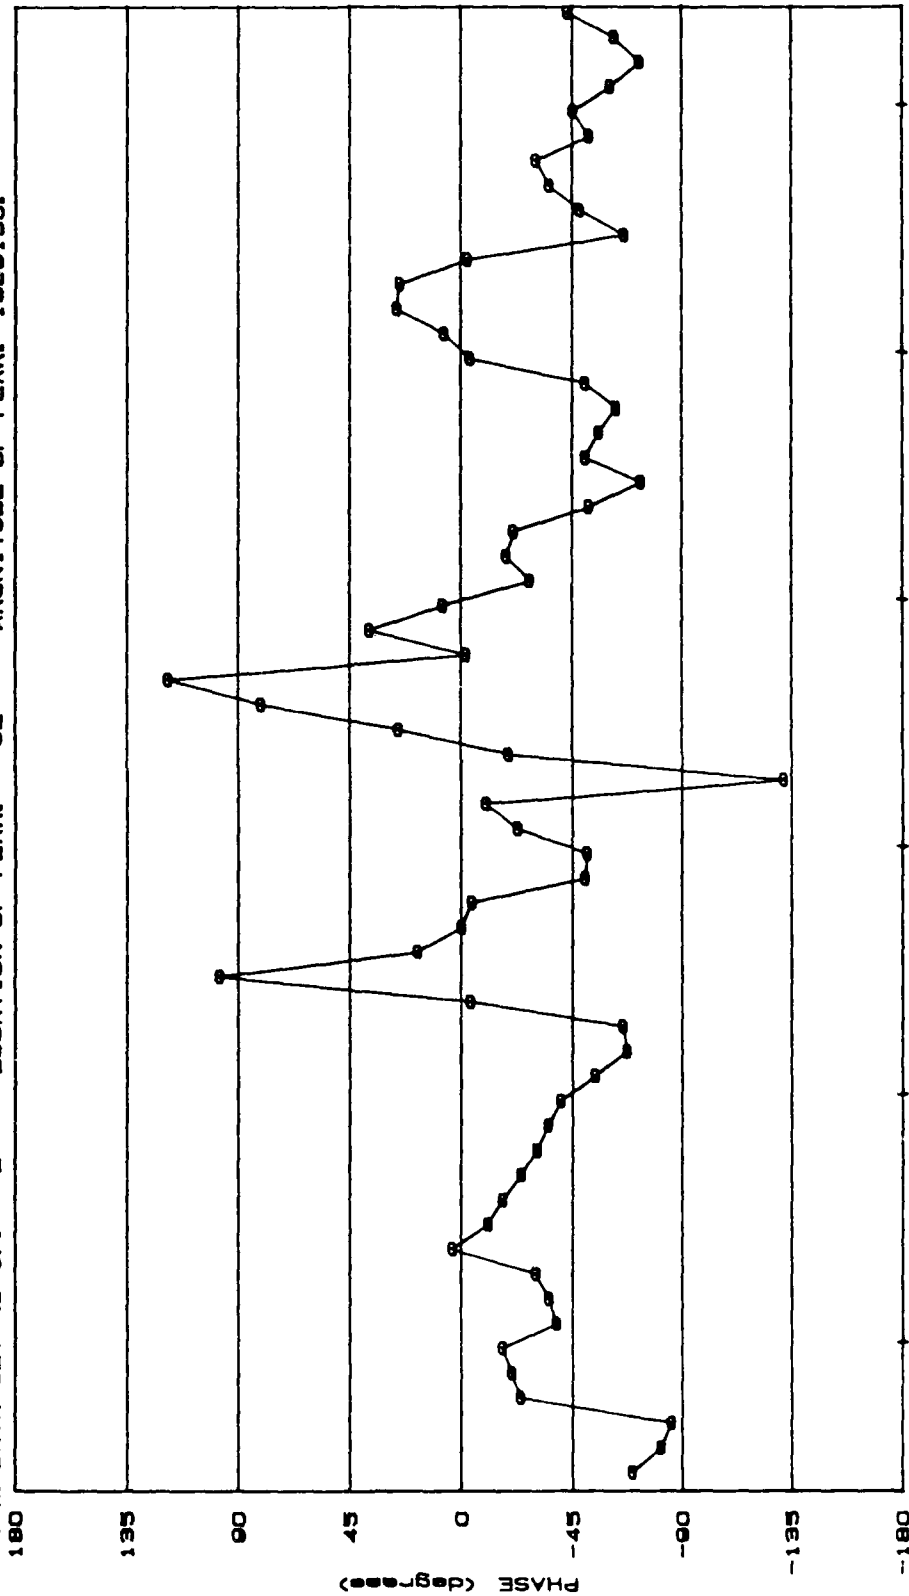

Plot 5. Phase of the one cycle digit response.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT	3	DATE	08/28/85	SOURCE	HLF-5
DATA SET		SEQUENCE	LAW	FREQUENCY (Hz)	250
HALF CYCLES/SAMPLE	1	785		SAMPLES/DIGIT	4
LOCATION OF PEAK	450			MAGNITUDE OF PEAK	85
DATA SET (°)	4			LOCATION OF PEAK	4

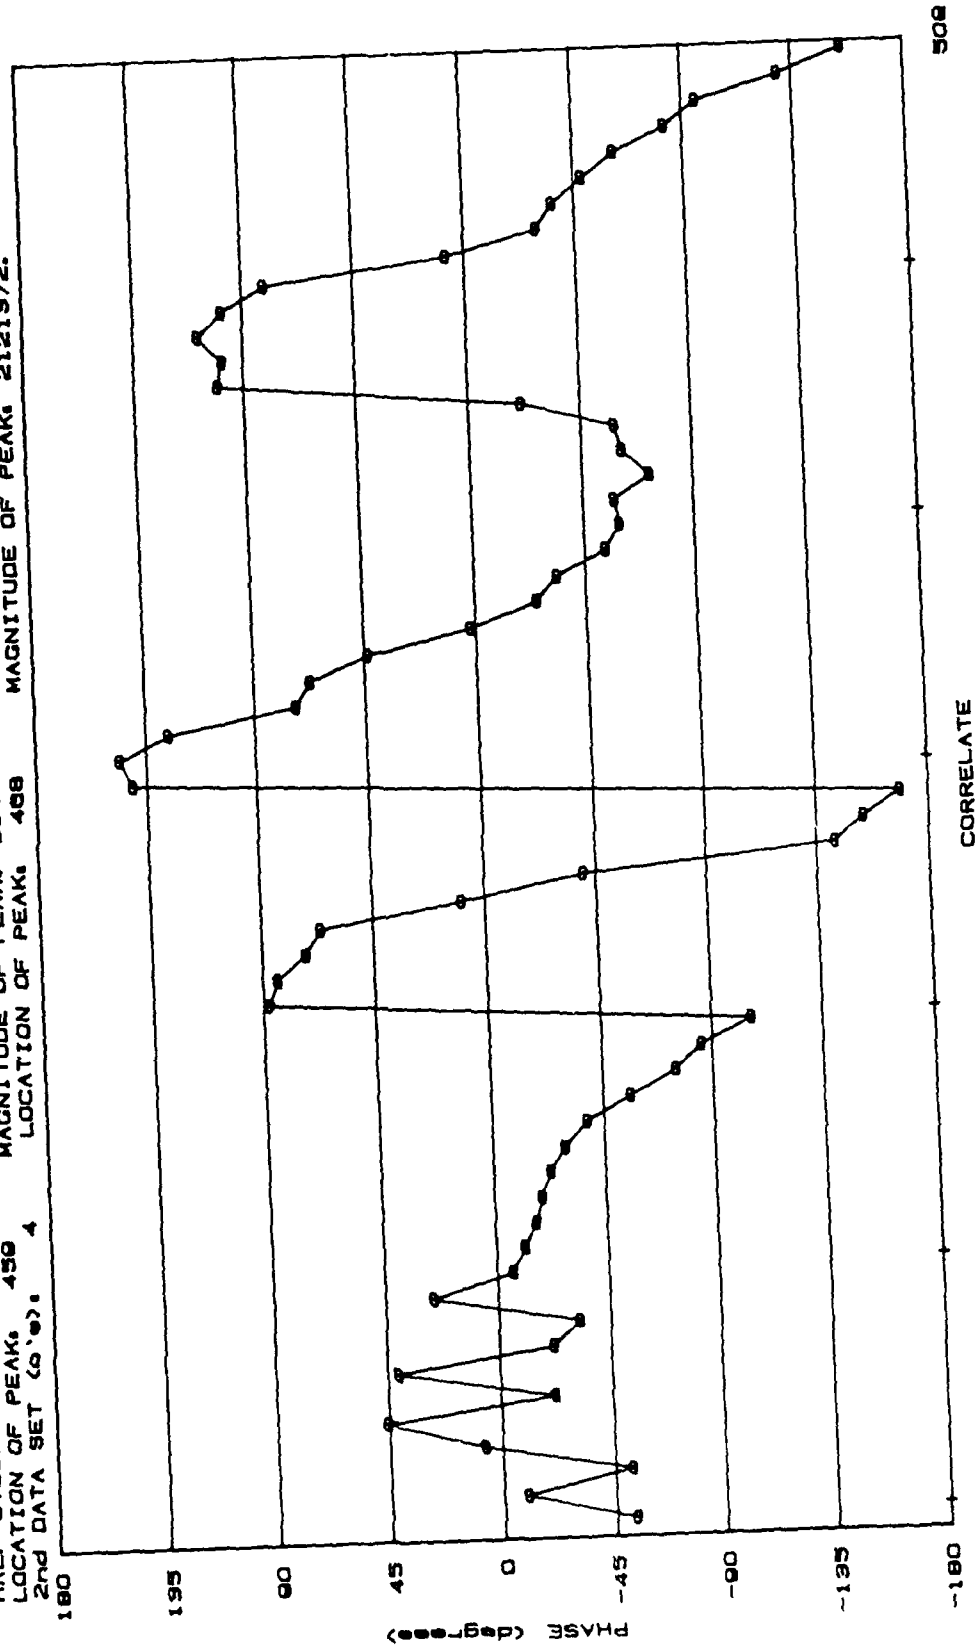


448
plot 6. phase of the two cycle digit response.
Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT


DATA SET: 5 DATE: 08/28/85 SOURCE: HLF-5
 SEQUENCE LAW: 765 FREQUENCY (Hz): 250
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 8
 LOCATION OF PEAK: 1040 MAGNITUDE OF PEAK: 1774094. MEDIAN VALUE: 1178
 2nd DATA SET (G's): 6 LOCATION OF PEAK: 1080 MAGNITUDE OF PEAK: 1549055.

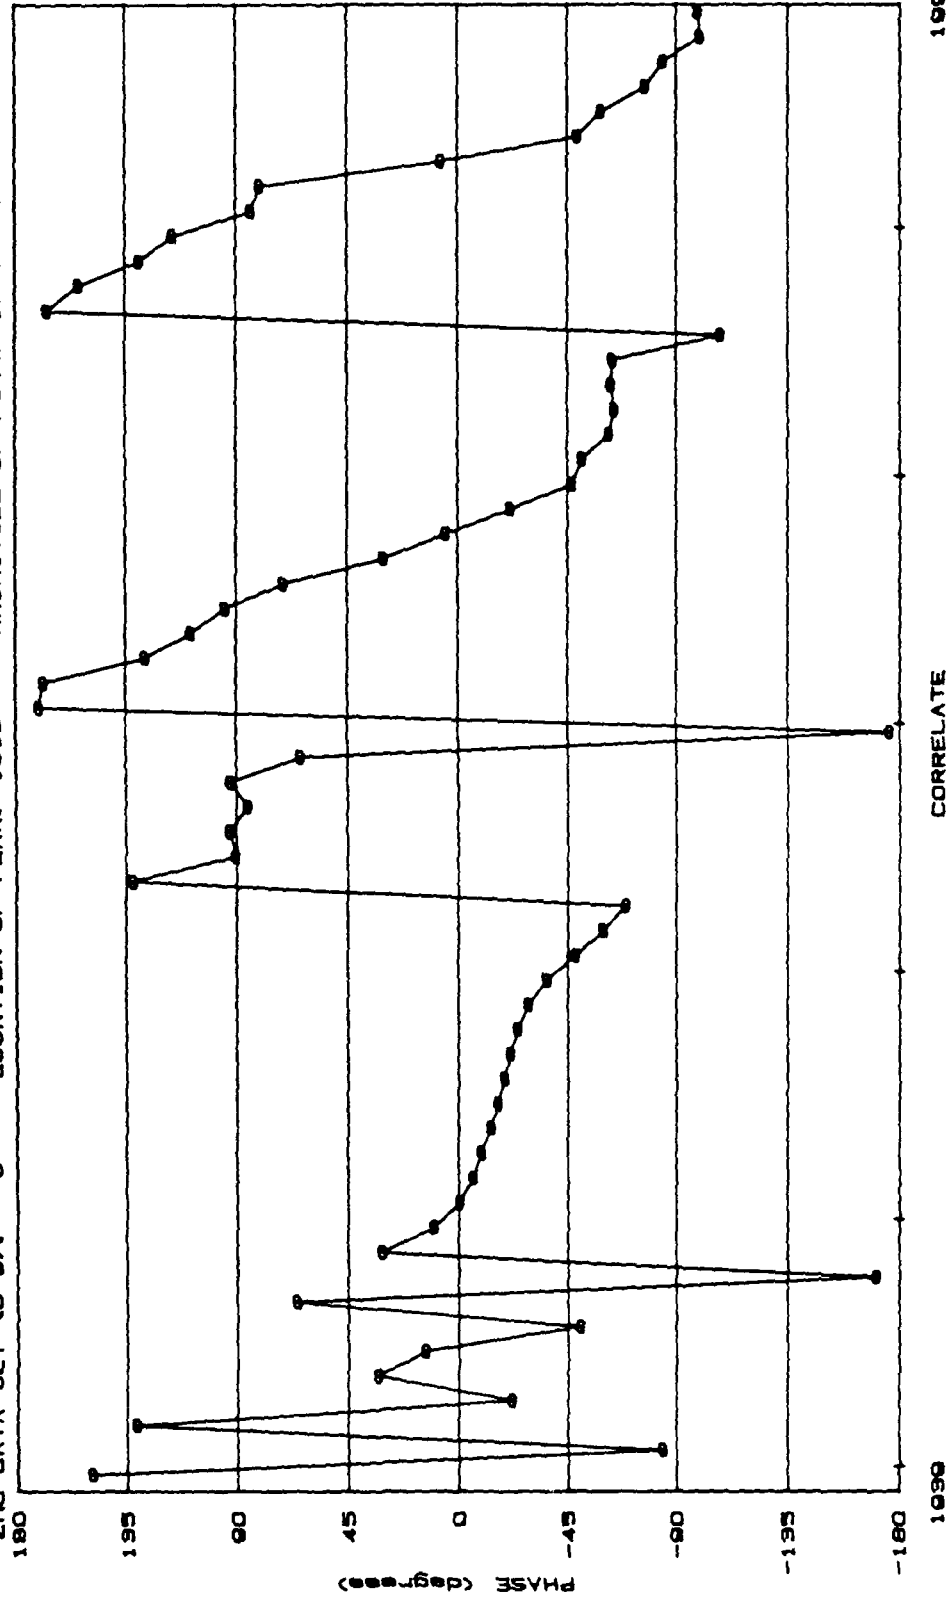

Plot 7. Phase of the four cycle digit response.
 Drive level = 7 vrms.


COOLEY ELECTRONICS LABORATORY

PHASE PLOT
 DATA SET, 7 DATE: 08/28/85 SOURCE: HLF-3
 SEQUENCE LAW, 709 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 10
 LOCATION OF PEAK, 1028 MAGNITUDE OF PEAK, 867155. MEDIAN VALUE, 800
 2nd DATA SET (a'0), 8 LOCATION OF PEAK, 1028 MAGNITUDE OF PEAK, 800869.

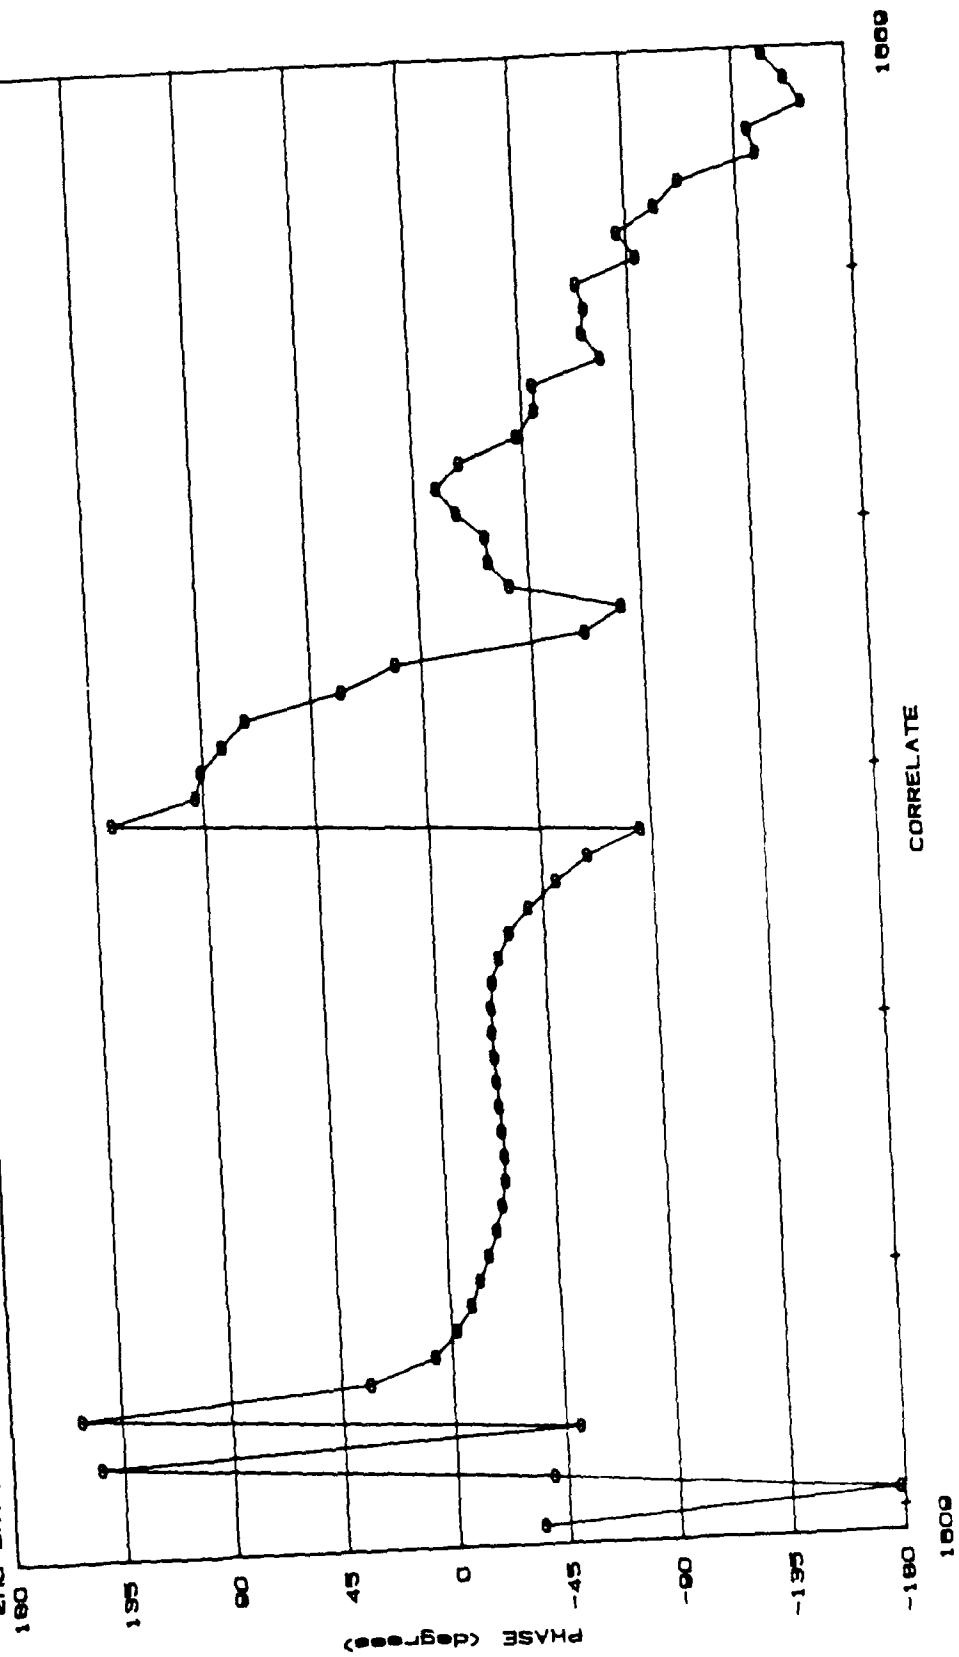


Plot 8. Phase of the eight cycle digit response.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 FFT (ROTATED BY 250) OF FULL DATA SET
 DATA SET, 2 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 703 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 2
 LOCATION OF PEAK, 82 MAGNITUDE OF PEAK, 1860155. MEDIAN VALUE, 28151

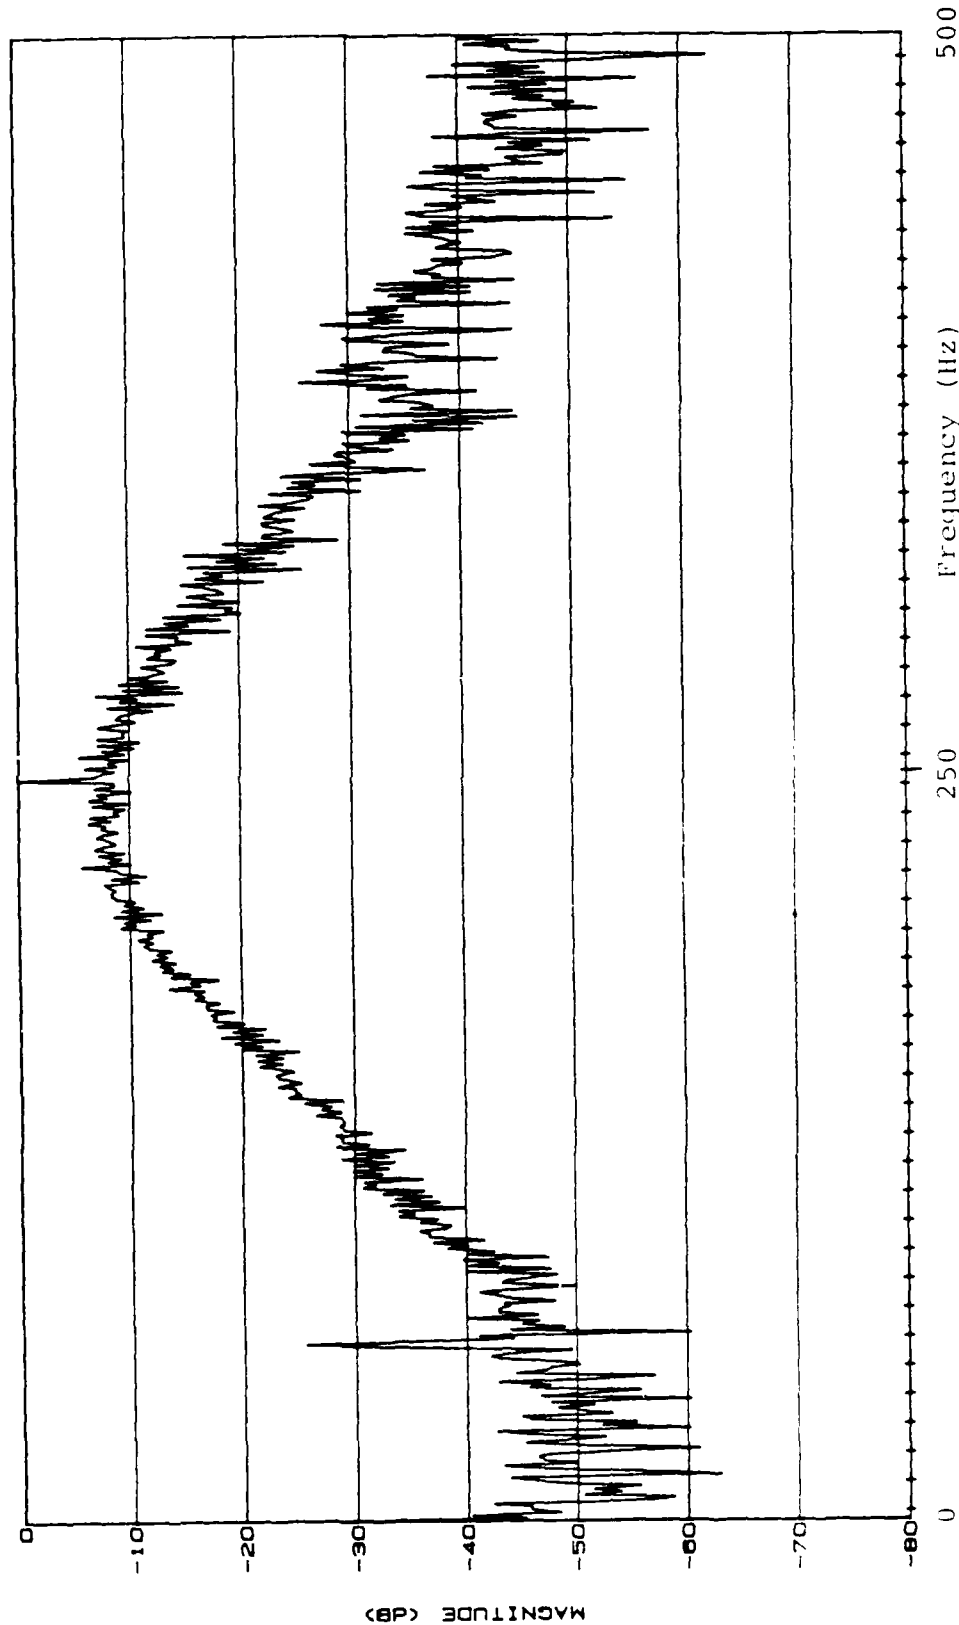


Plot 9. FFT of the one cycle digit response.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 FFT (ROTATED BY 1024) OF FULL DATA SET
 DATA SET, 6 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 705 HALF CYCLES/SAMPLE, 1 FREQUENCY (Hz), 250
 LOCATION OF PEAK, 1900 SAMPLES/DIGIT, 8 MAGNITUDE OF PEAK, 1549055, MEDIAN VALUE, 9950

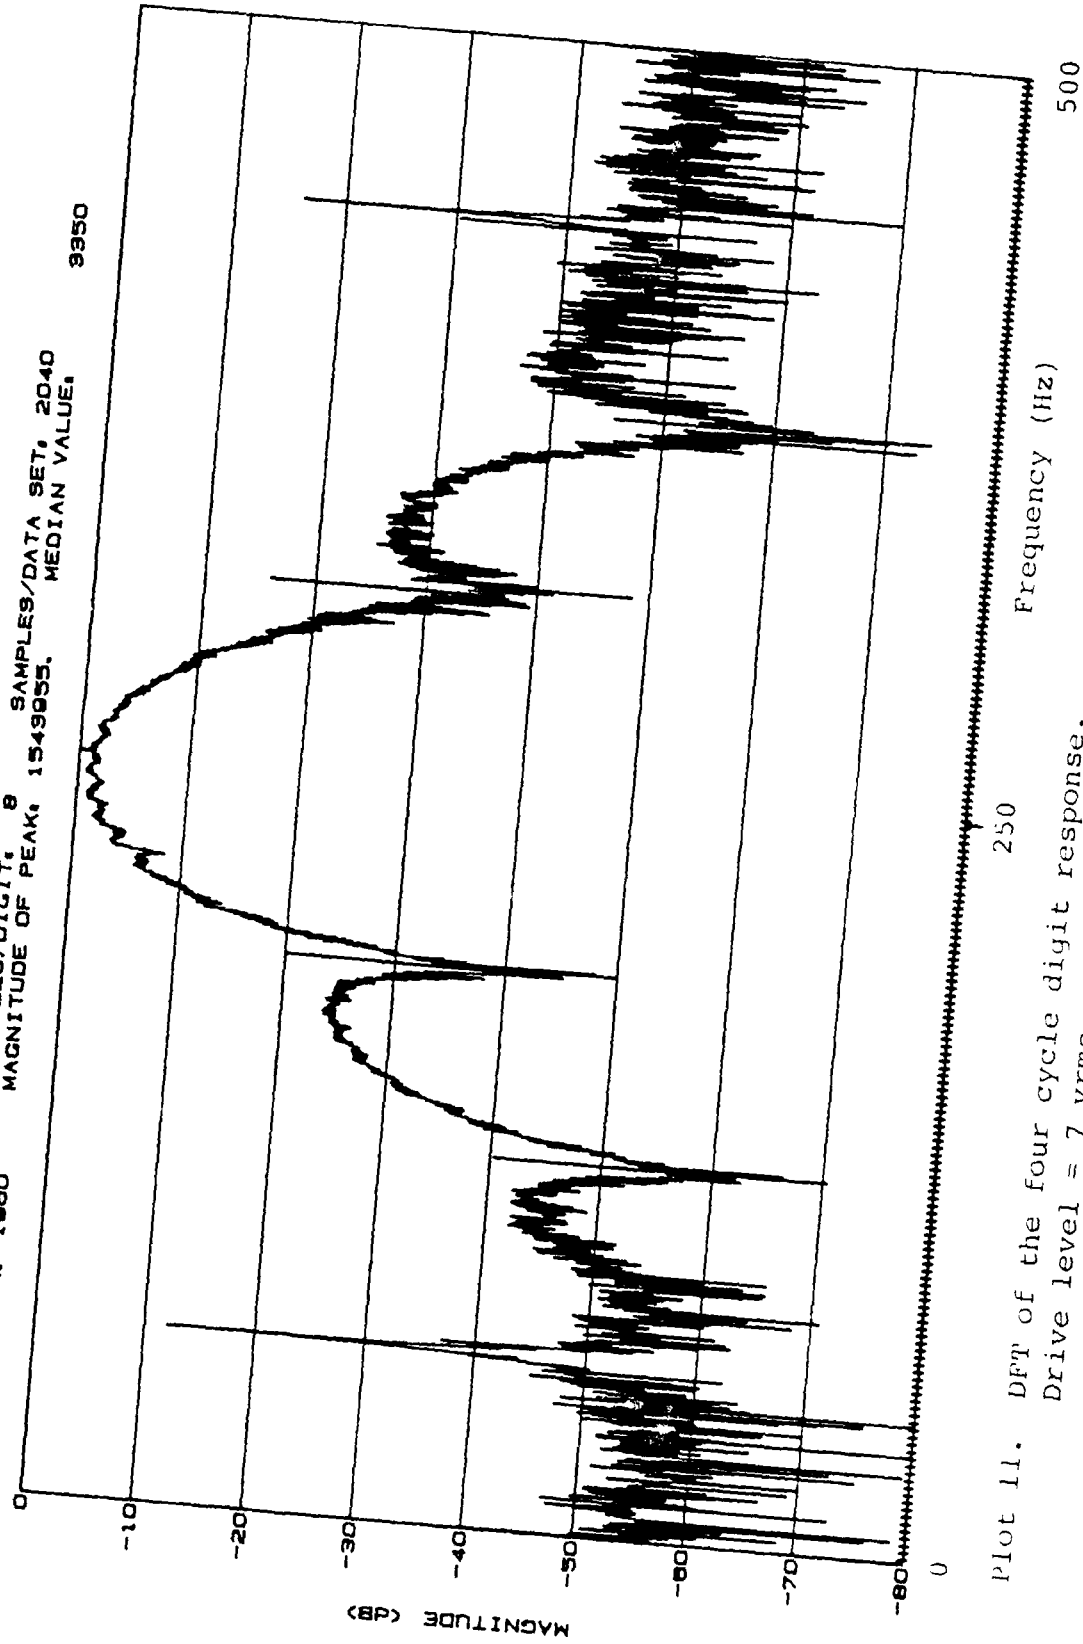

Plot 11. DFT of the four cycle digit response.
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 FFT (ROTATED BY 2048) OF FULL DATA SET
 DATA SET, 8 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 765 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 10
 LOCATION OF PEAK, 1028 MAGNITUDE OF PEAK, 800863. MEDIAN VALUE, 1116

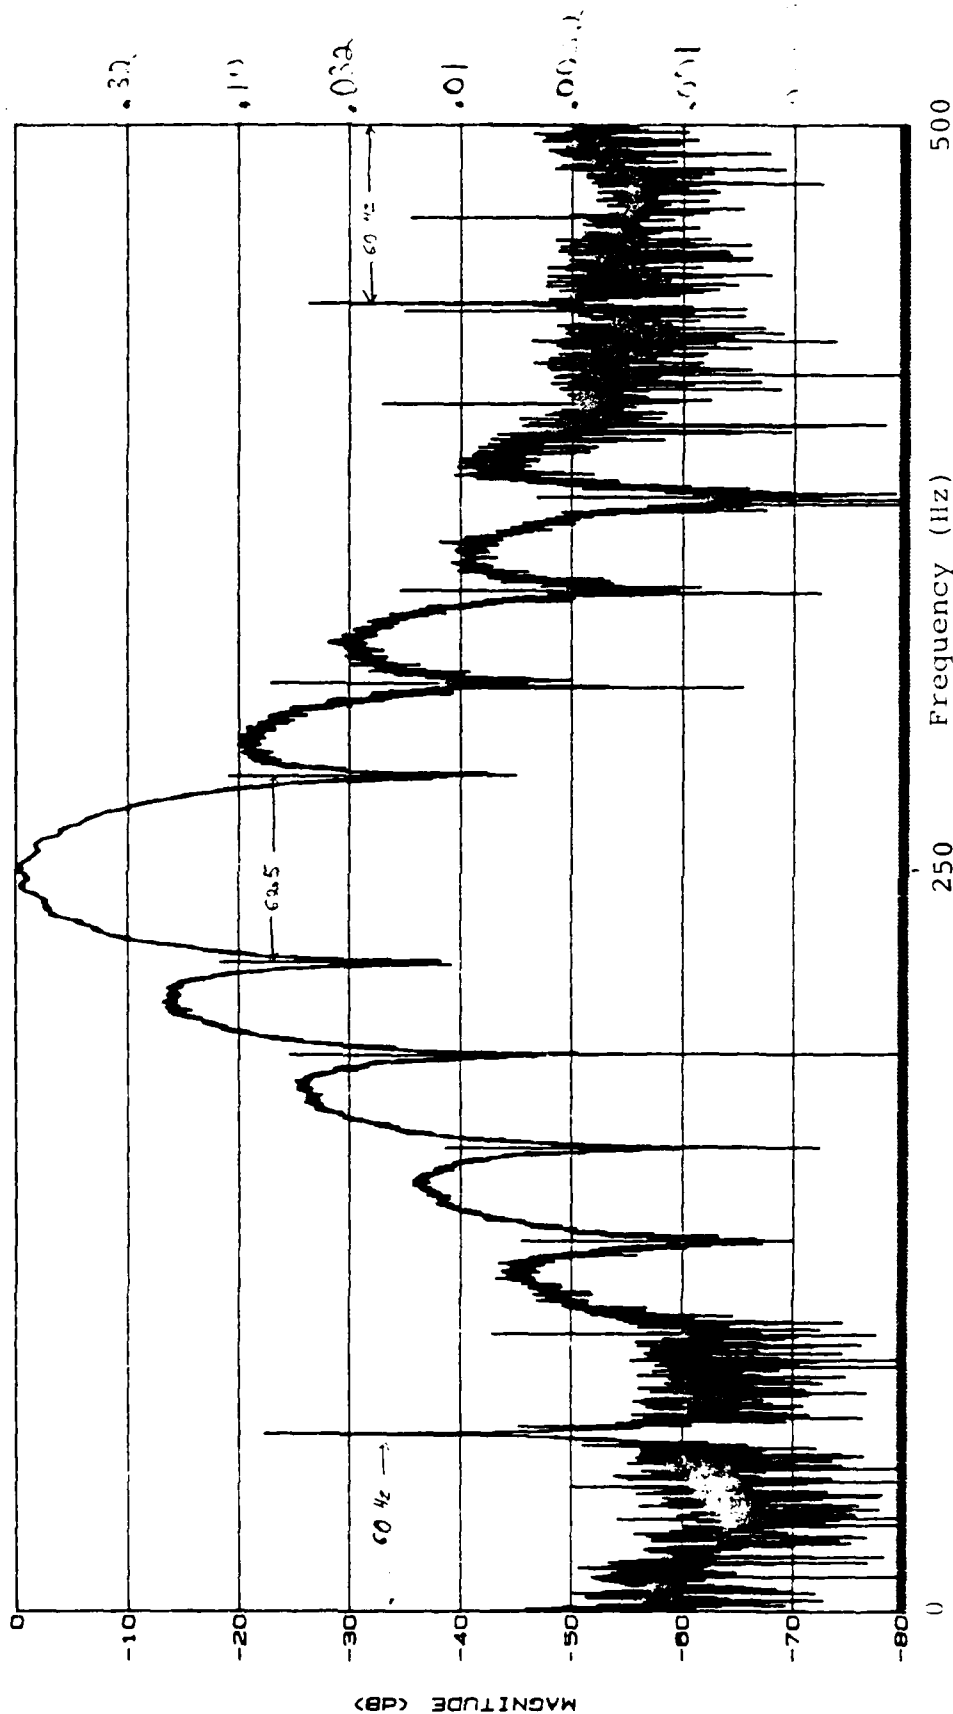

Plot 12. DFT of the eight cycle digit response.
 Drive level = 7 v rms.

COOLEY ELECTRONICS LABORATORY


Full data set. Time = 1.02 sec. Scaled to 0400000

DATA SET. 2 DATE. 08/28/85 SOURCE. HLF-5

SEQUENCE LAW. 705 FREQUENCY (Hz). 250

HALF CYCLES/SAMPLE. 1 SAMPLES/DIGIT. 2

LOCATION OF PEAK. 82 MAGNITUDE OF PEAK. 1800155. MEDIAN VALUE. 28151

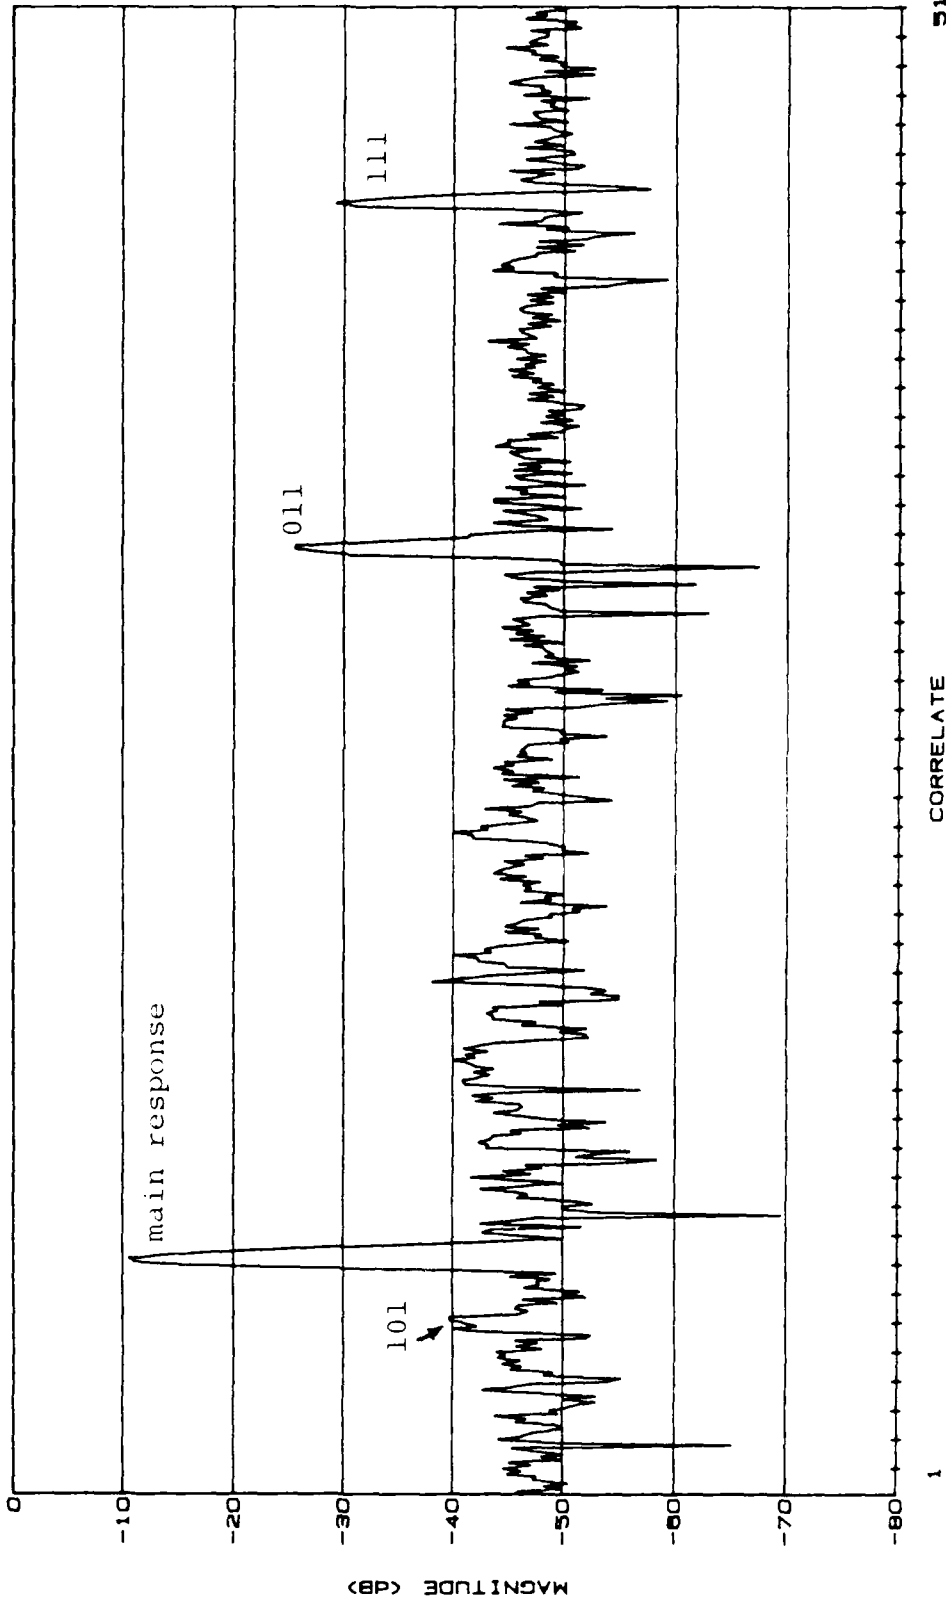

Plot 13. Full period of one cycle digit response (dB).

Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
1st half of data set rotated by 187. Time = 1.02 sec. Scaled to 3203448

COULTE ELECTRONICS CORPORATION
1st half of data set rotated by 187. Time = 1.02 sec. Scaled to 3203448
DATA SET: 4 DATE: 08/28/85 SOURCE: HLF-5

DATA SET: 4 DATE: 08/20/85 SOURCE: HLF-5


SEQUENCE	LAW	705	FREQUENCY (Hz)	250
1	1	1	1	1
2	2	2	2	2
3	3	3	3	3
4	4	4	4	4
5	5	5	5	5
6	6	6	6	6
7	7	7	7	7
8	8	8	8	8
9	9	9	9	9
10	10	10	10	10
11	11	11	11	11
12	12	12	12	12
13	13	13	13	13
14	14	14	14	14
15	15	15	15	15
16	16	16	16	16
17	17	17	17	17
18	18	18	18	18
19	19	19	19	19
20	20	20	20	20
21	21	21	21	21
22	22	22	22	22
23	23	23	23	23
24	24	24	24	24
25	25	25	25	25
26	26	26	26	26
27	27	27	27	27
28	28	28	28	28
29	29	29	29	29
30	30	30	30	30
31	31	31	31	31
32	32	32	32	32
33	33	33	33	33
34	34	34	34	34
35	35	35	35	35
36	36	36	36	36
37	37	37	37	37
38	38	38	38	38
39	39	39	39	39
40	40	40	40	40
41	41	41	41	41
42	42	42	42	42
43	43	43	43	43
44	44	44	44	44
45	45	45	45	45
46	46	46	46	46
47	47	47	47	47
48	48	48	48	48
49	49	49	49	49
50	50	50	50	50
51	51	51	51	51
52	52	52	52	52
53	53	53	53	53
54	54	54	54	54
55	55	55	55	55
56	56	56	56	56
57	57	57	57	57
58	58	58	58	58
59	59	59	59	59
60	60	60	60	60
61	61	61	61	61
62	62	62	62	62
63	63	63	63	63
64	64	64	64	64
65	65	65	65	65
66	66	66	66	66
67	67	67	67	67
68	68	68	68	68
69	69	69	69	69
70	70	70	70	70
71	71	71	71	71
72	72	72	72	72
73	73	73	73	73
74	74	74	74	74
75	75	75	75	75
76	76	76	76	76
77	77	77	77	77
78	78	78	78	78
79	79	79	79	79
80	80	80	80	80
81	81	81	81	81
82	82	82	82	82
83	83	83	83	83
84	84	84	84	84
85	85	85	85	85
86	86	86	86	86
87	87	87	87	

```

SEQUENCE LAW, 705      FREQUENCY (Hz), 250
HALF CYCLES/SAMPLE, 1  SAMPLES/DIGIT, 4  SAMPLES/DATA SET, 1020

```

B412

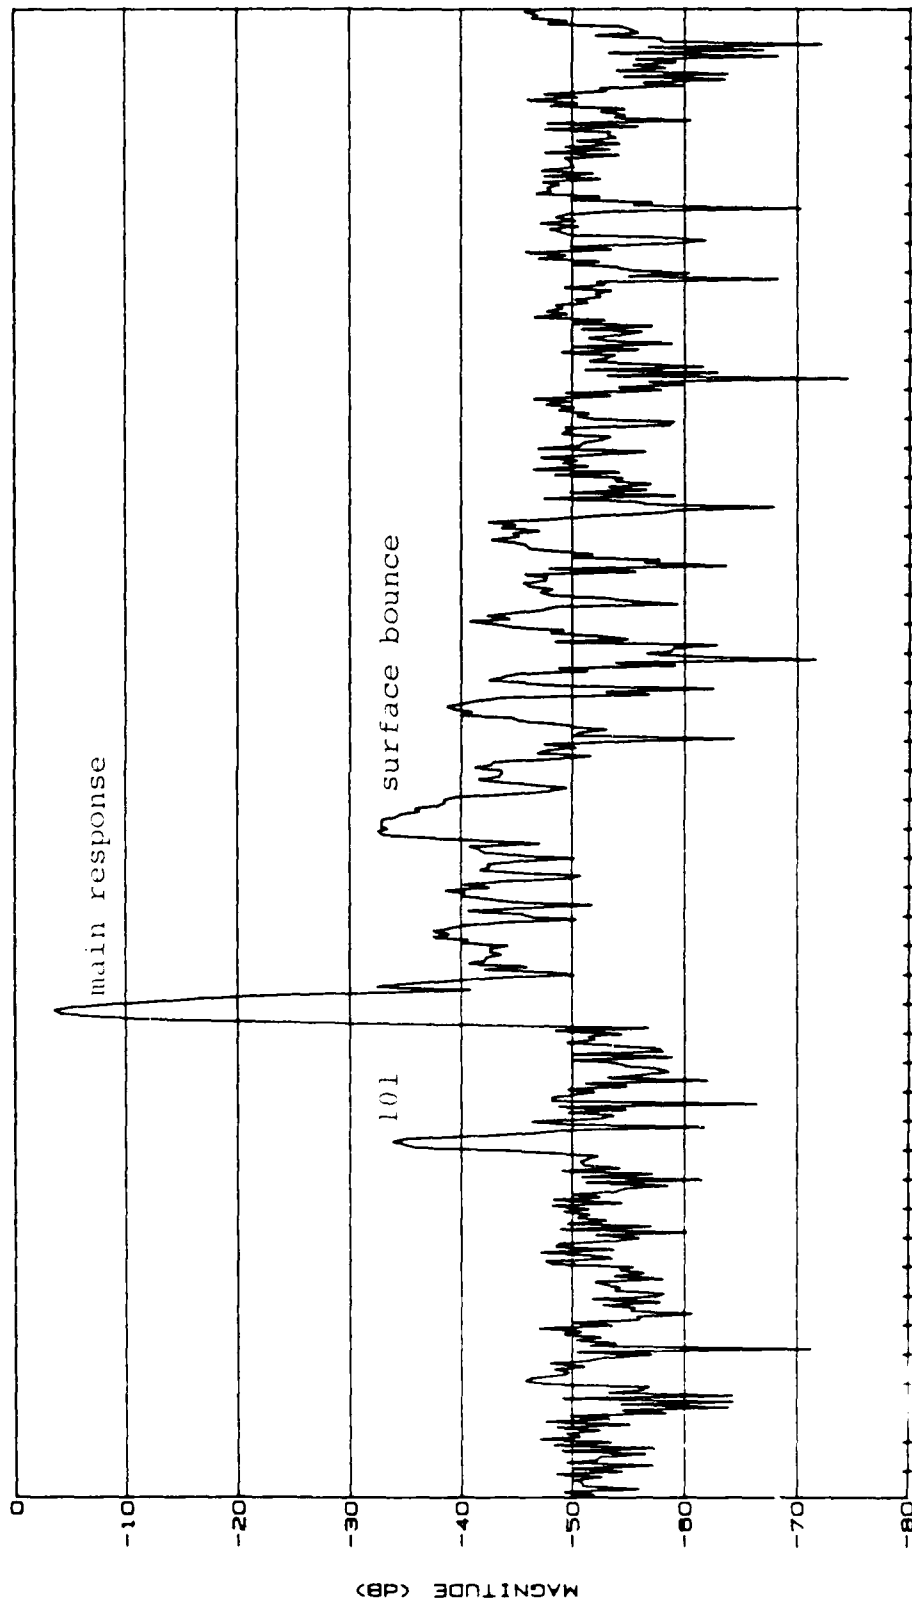


10E

CORRELATE

010


Plot 11. First half of full period two cycle digit response (dB).
Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 2nd half of data set rotated by 107
 DATA SET, 4 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4
 LOCATION OF PEAK, 408 MAGNITUDE OF PEAK, 2121372. MEDIAN VALUE, 8412

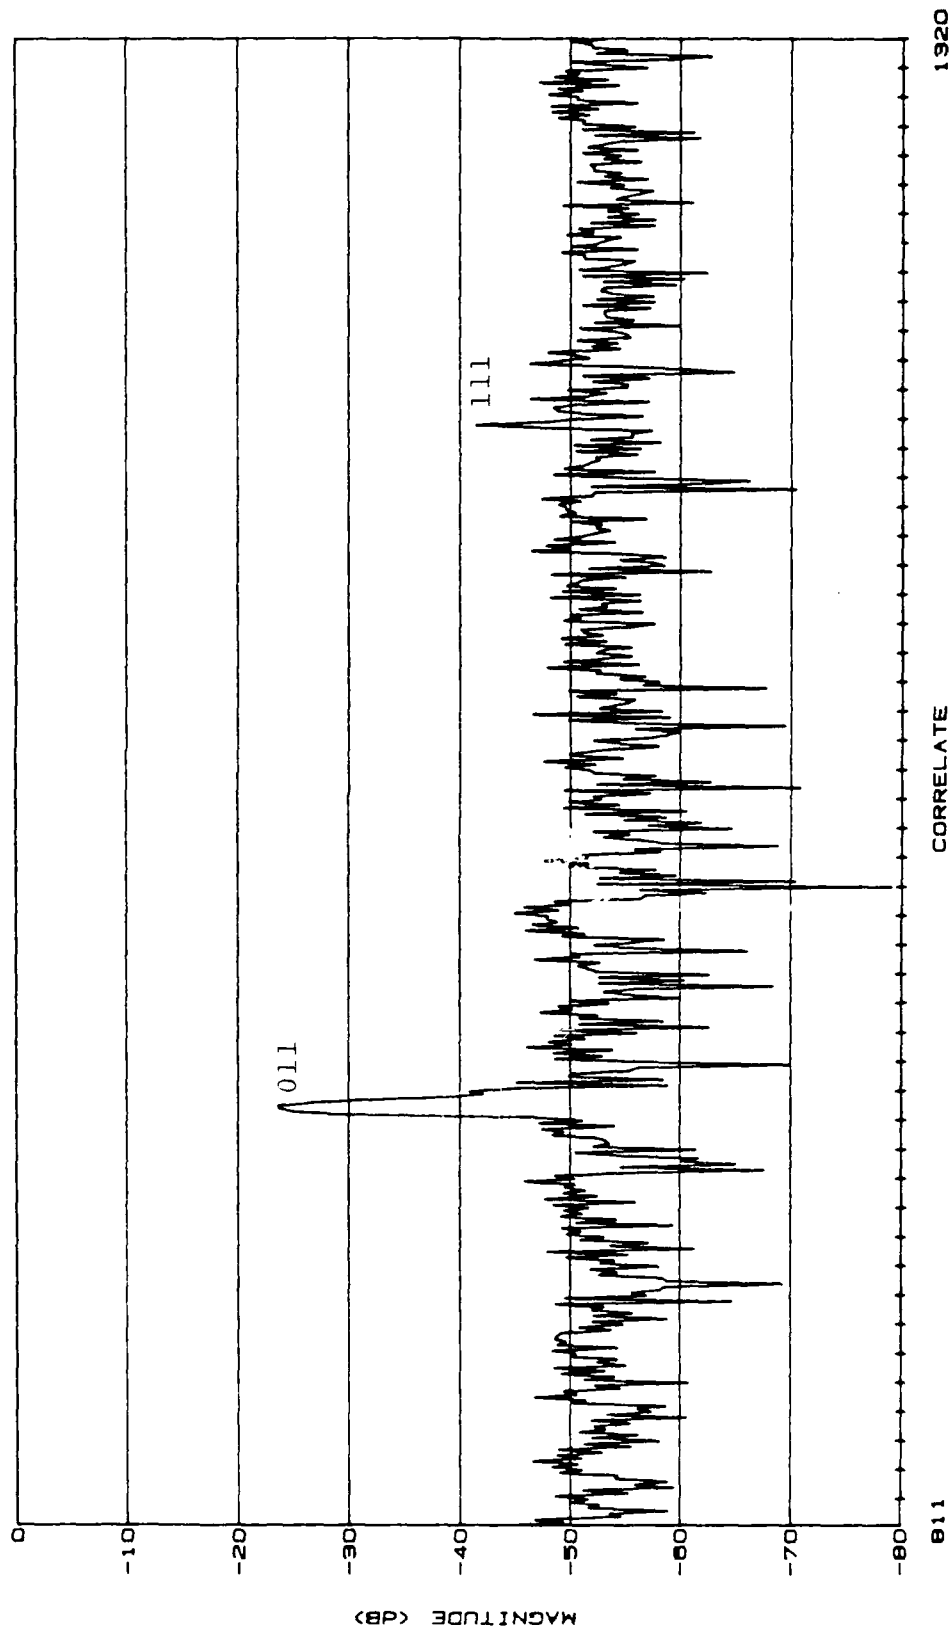

Plot 15. Second half of full period two cycle digit response (dB).
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 1st quarter of data set rotated by 1750. Time = 1.02 sec. Scaled to 1001724
 DATA SET, 6 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 SAMPLES/DATA SET, 2040
 LOCATION OF PEAK, 1000 MAGNITUDE OF PEAK, 1543055, MEDIAN VALUE, 9350

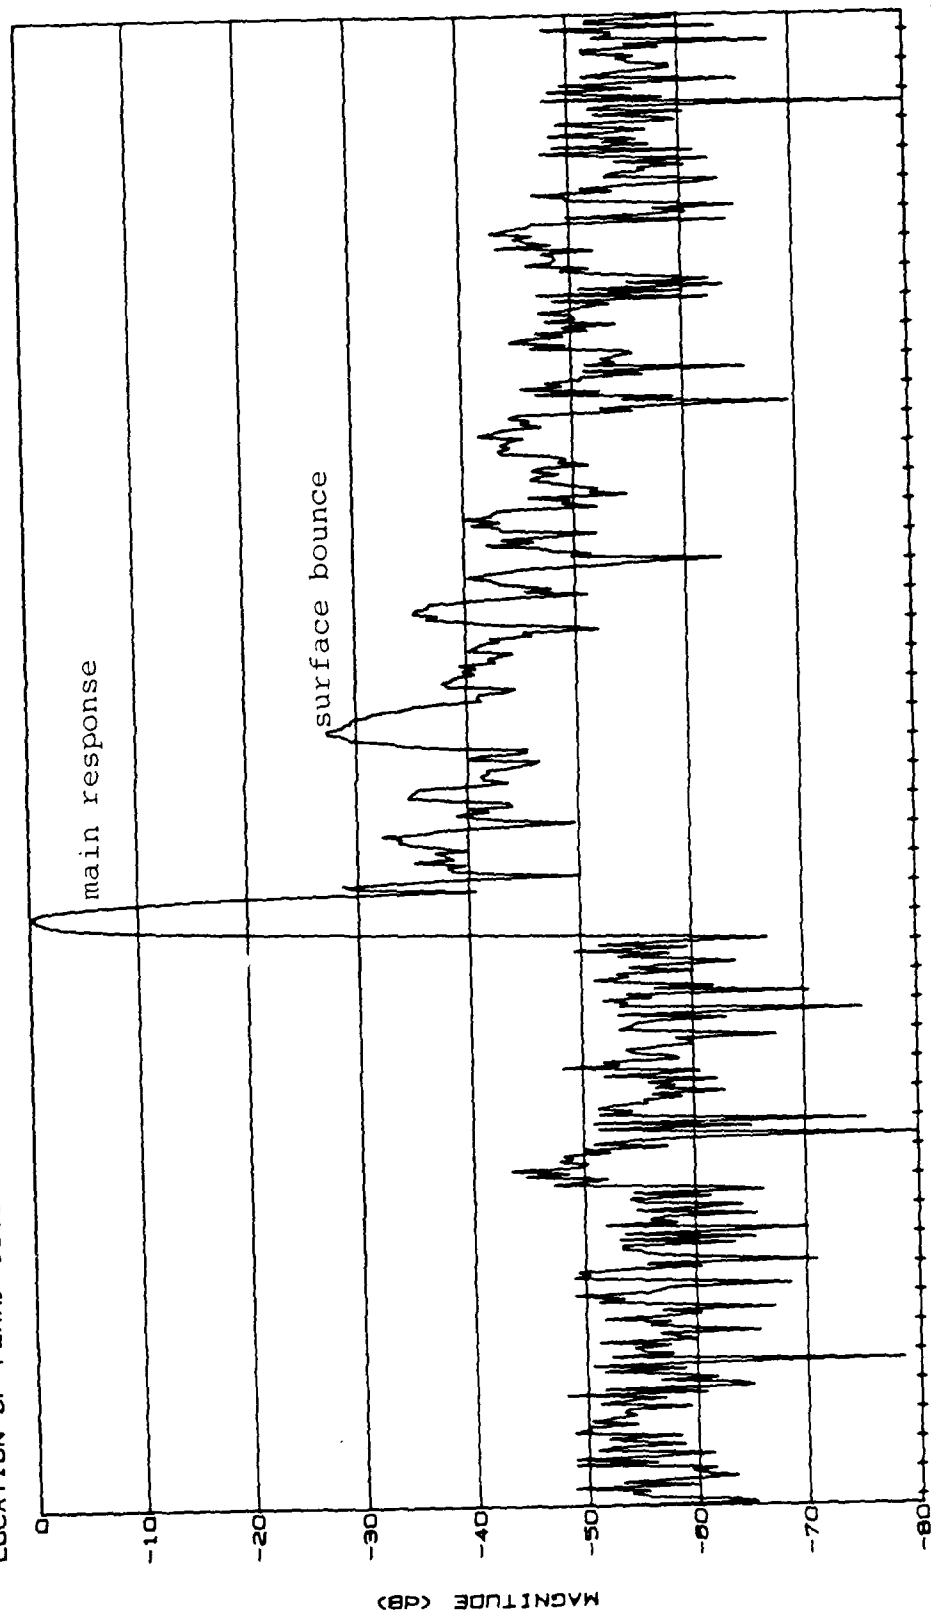

2200

CORRELATE

1757
 Plot 16. First quarter of full period four cycle digit response (dB).
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

2nd quarter of data set. Rotated by 1750. Scaled to 1601724


DATA SET, 8 DATE: 08/28/85 SOURCE: HLF-5

SEQUENCE LAW, 765 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8

LOCATION OF PEAK, 1080 MAGNITUDE OF PEAK, 1543055. SAMPLES/DATA SET, 2040

MEDIAN VALUE, 8950

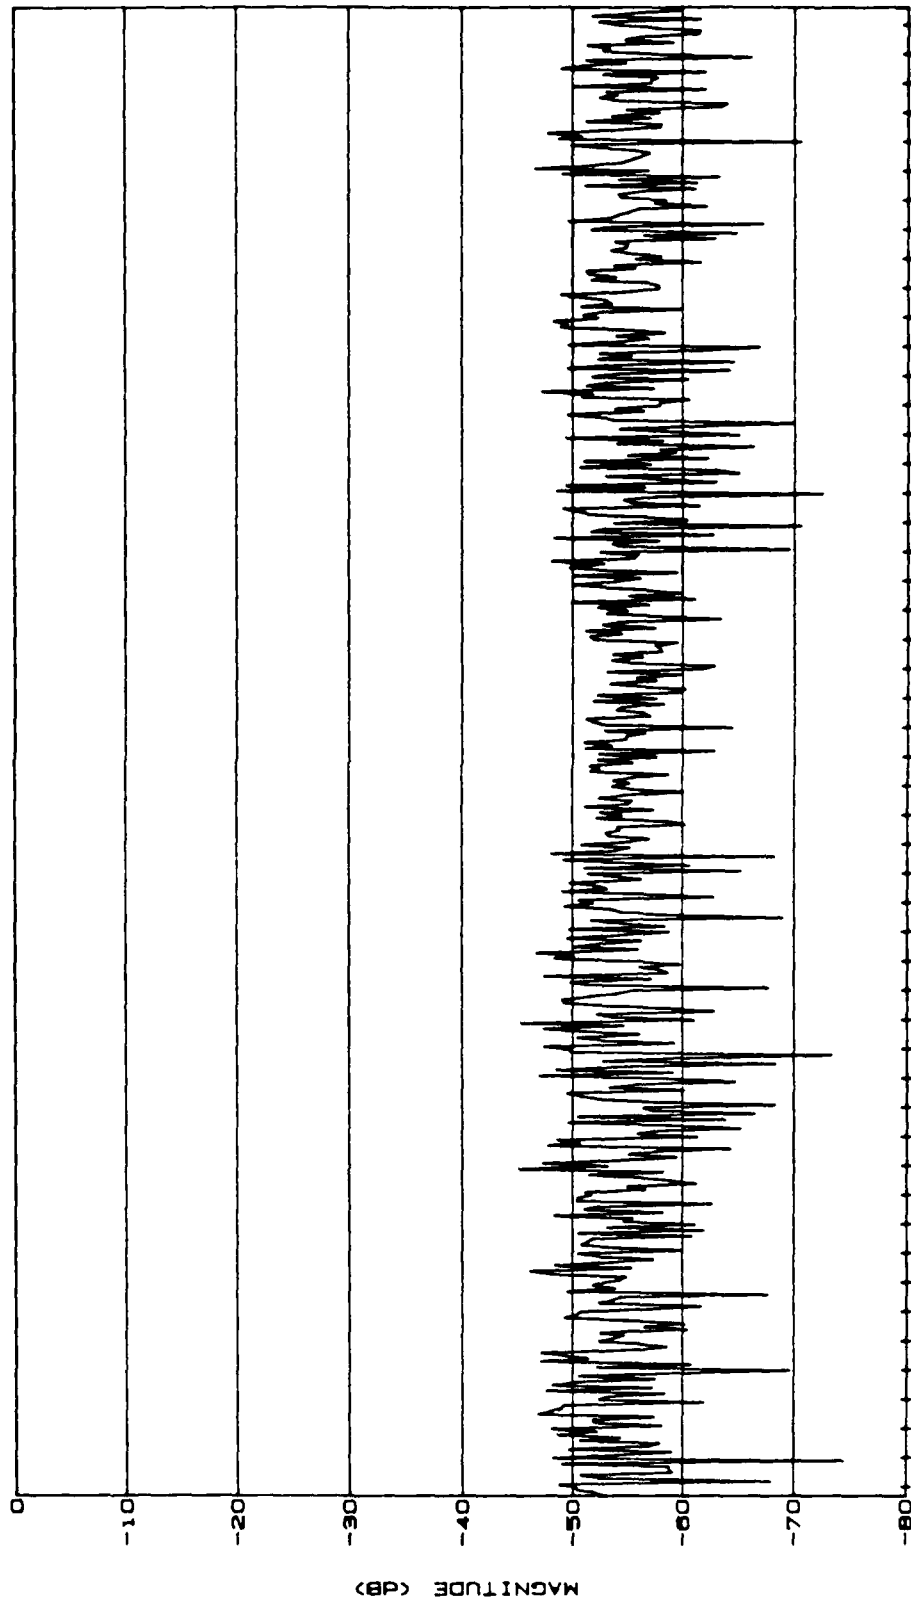


227

CORRELATE

730

Plot 17. Second quarter of full period four cycle digit response (dB).
Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY
 3rd quarter of data set, rotated by 1750. Scaled to 1001724
 DATA SET, 8 DATE, 08/28/85 SOURCE, HLF-5
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 SAMPLES/DATA SET, 2040
 LOCATION OF PEAK, 1000 MAGNITUDE OF PEAK, 1543055. MEDIAN VALUE, 3350

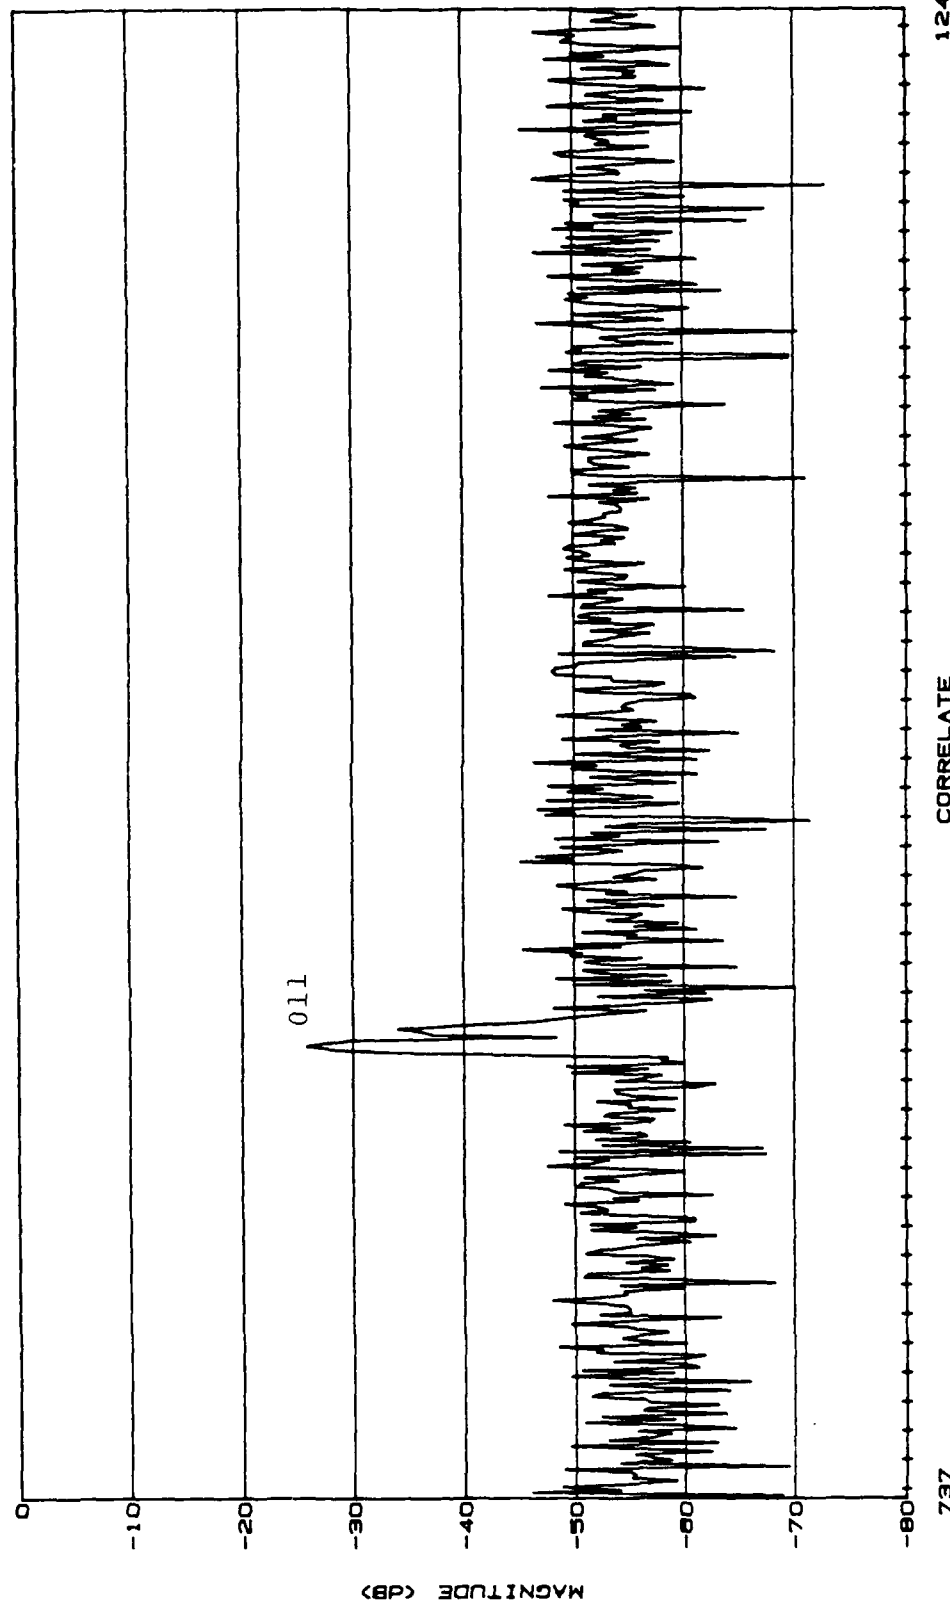

737 CORRELATE 1240
 Plot 18. Third quarter of full period four cycle digit response (dB).
 Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

4th quarter of data set, rotated by 1750. Scaled to 1801724


DATA SET, 0 DATE, 08/28/85 SOURCE, HLF-5

SEQUENCE LAW, 705 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8

SAMPLES/DATA SET, 2040

LOCATION OF PEAK, 1000 MAGNITUDE OF PEAK, 1543055. MEDIAN VALUE, 8950

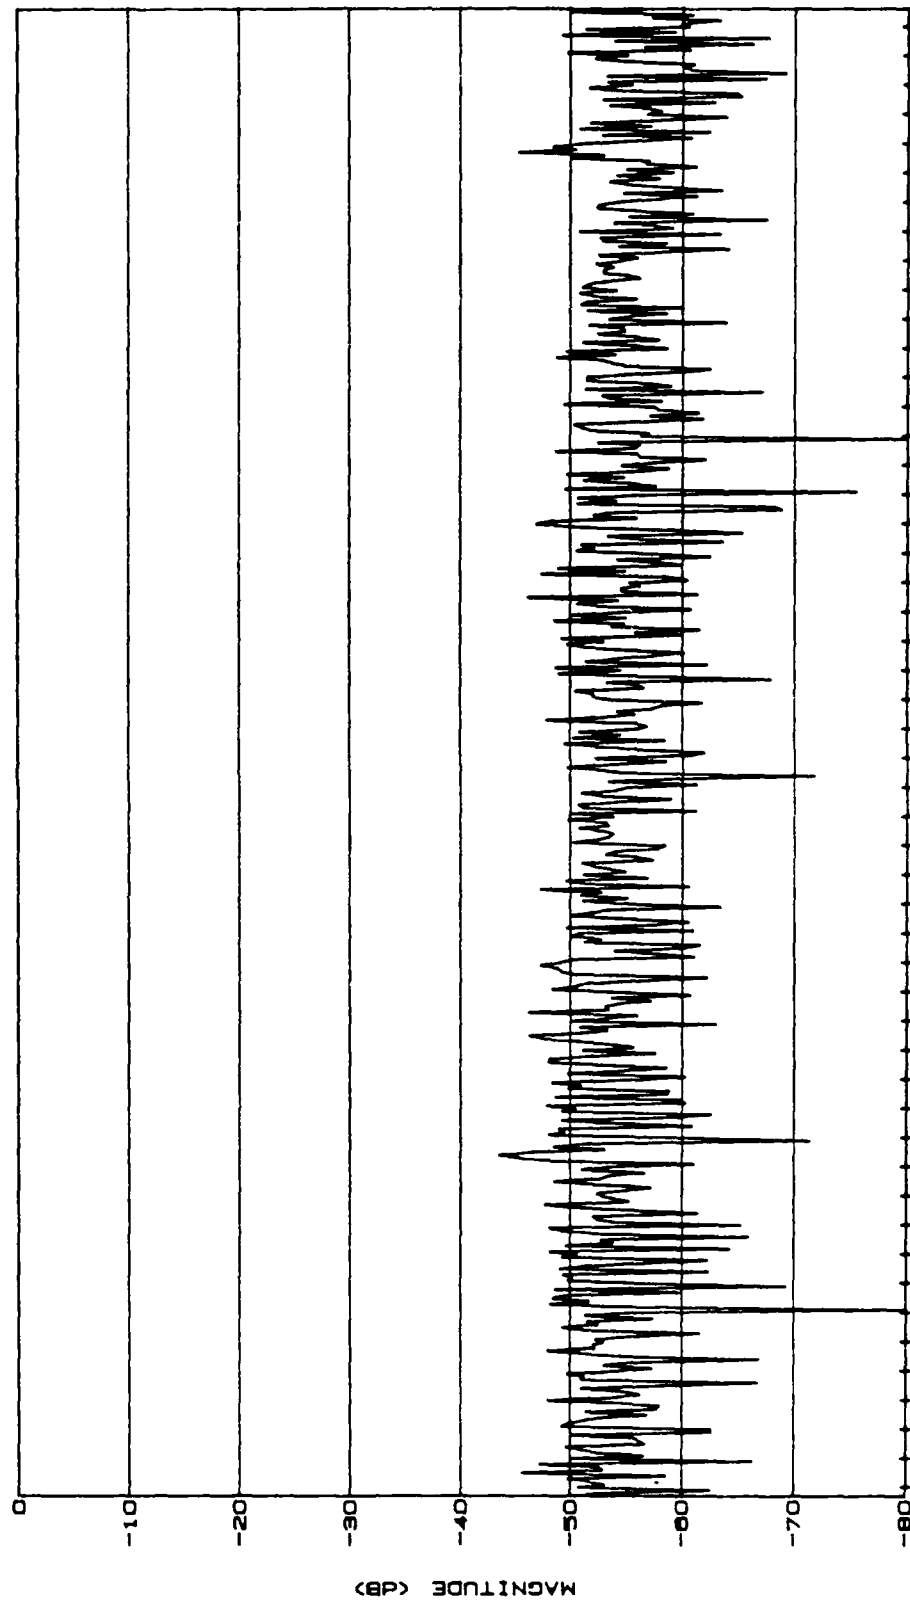

1247

CORRELATE

1750

Plot 19. Fourth quarter of full period four cycle digit response (dB).
Drive level = 7 vrms.

COOLEY ELECTRONICS LABORATORY

Digit response ... 3.5v RMS, 306 ft ... 2nd set scaled to 5447112


DATA SET, 1 DATE, 08/28/85 SOURCE, HLF B

SEQUENCE LAW, 705 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 2

LOCATION OF PEAK, 8 MAGNITUDE OF PEAK, 9548302. MEDIAN VALUE, 510

2nd DATA SET (0's): 2 LOCATION OF PEAK, 10 MAGNITUDE OF PEAK, 1040437.

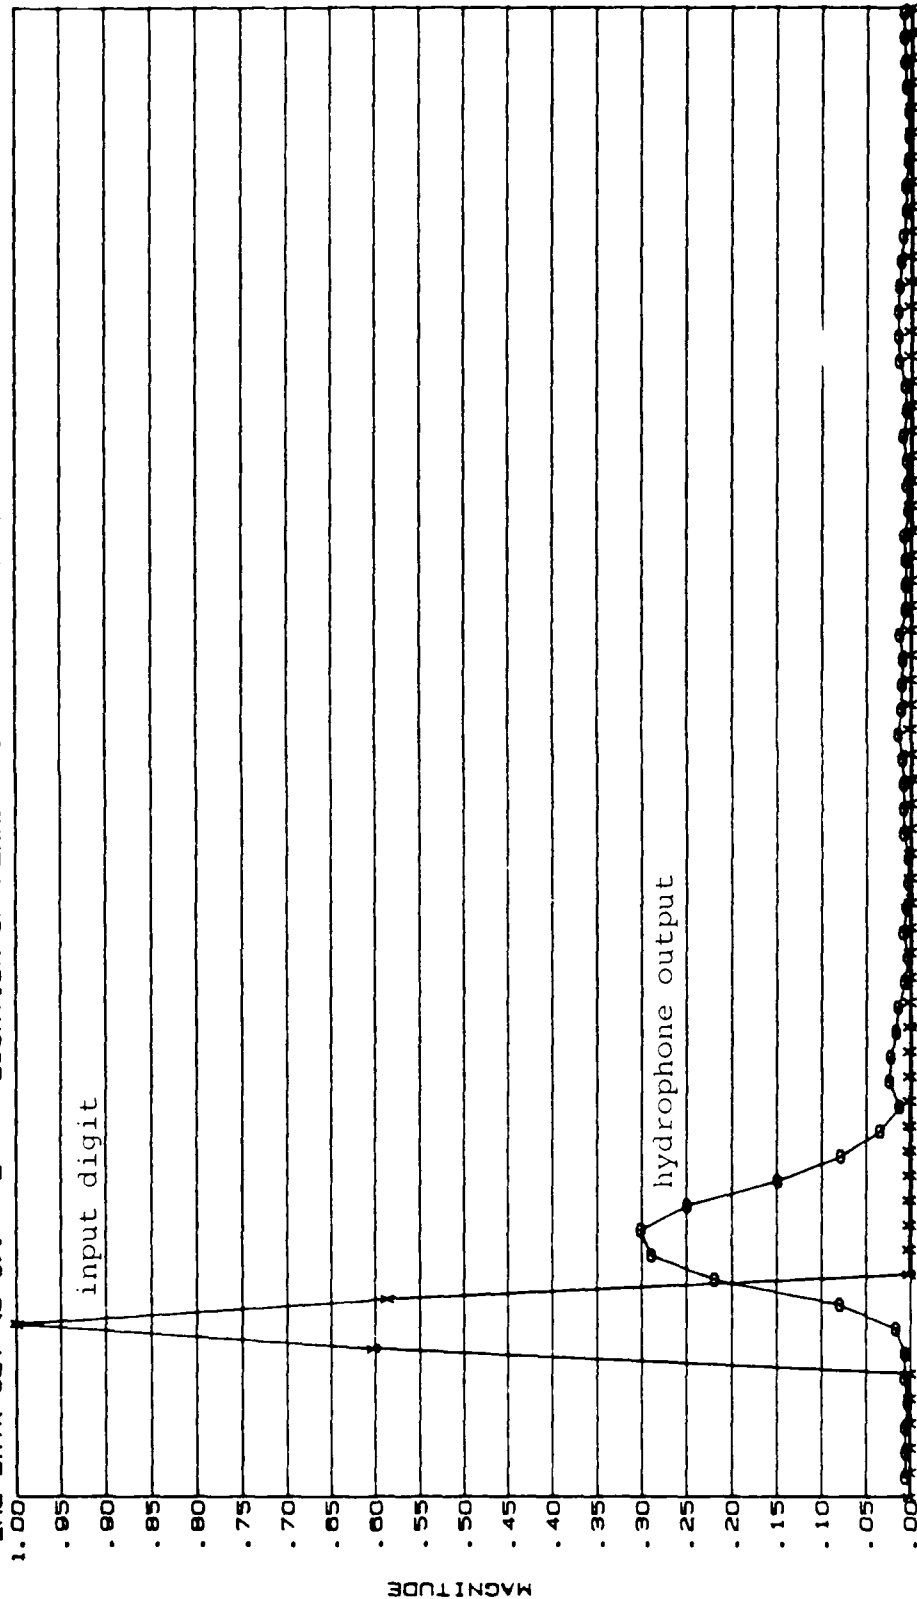

CORRELATE

1

01

Plot 20. One cycle digit response, direct path delay removed.
Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

Digit response ... 3.5v RMS. 308 ft ... 2nd set scaled to 2723558


DATA SET, 3 DATE: 08/28/85 SOURCE: HLF-5 B

SEQUENCE LAW, 785 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4

LOCATION OF PEAK, 160 MAGNITUDE OF PEAK, 1776749. MEDIAN VALUE, 2483

2nd DATA SET (G's), 4 LOCATION OF PEAK, 168 MAGNITUDE OF PEAK, 2109717.

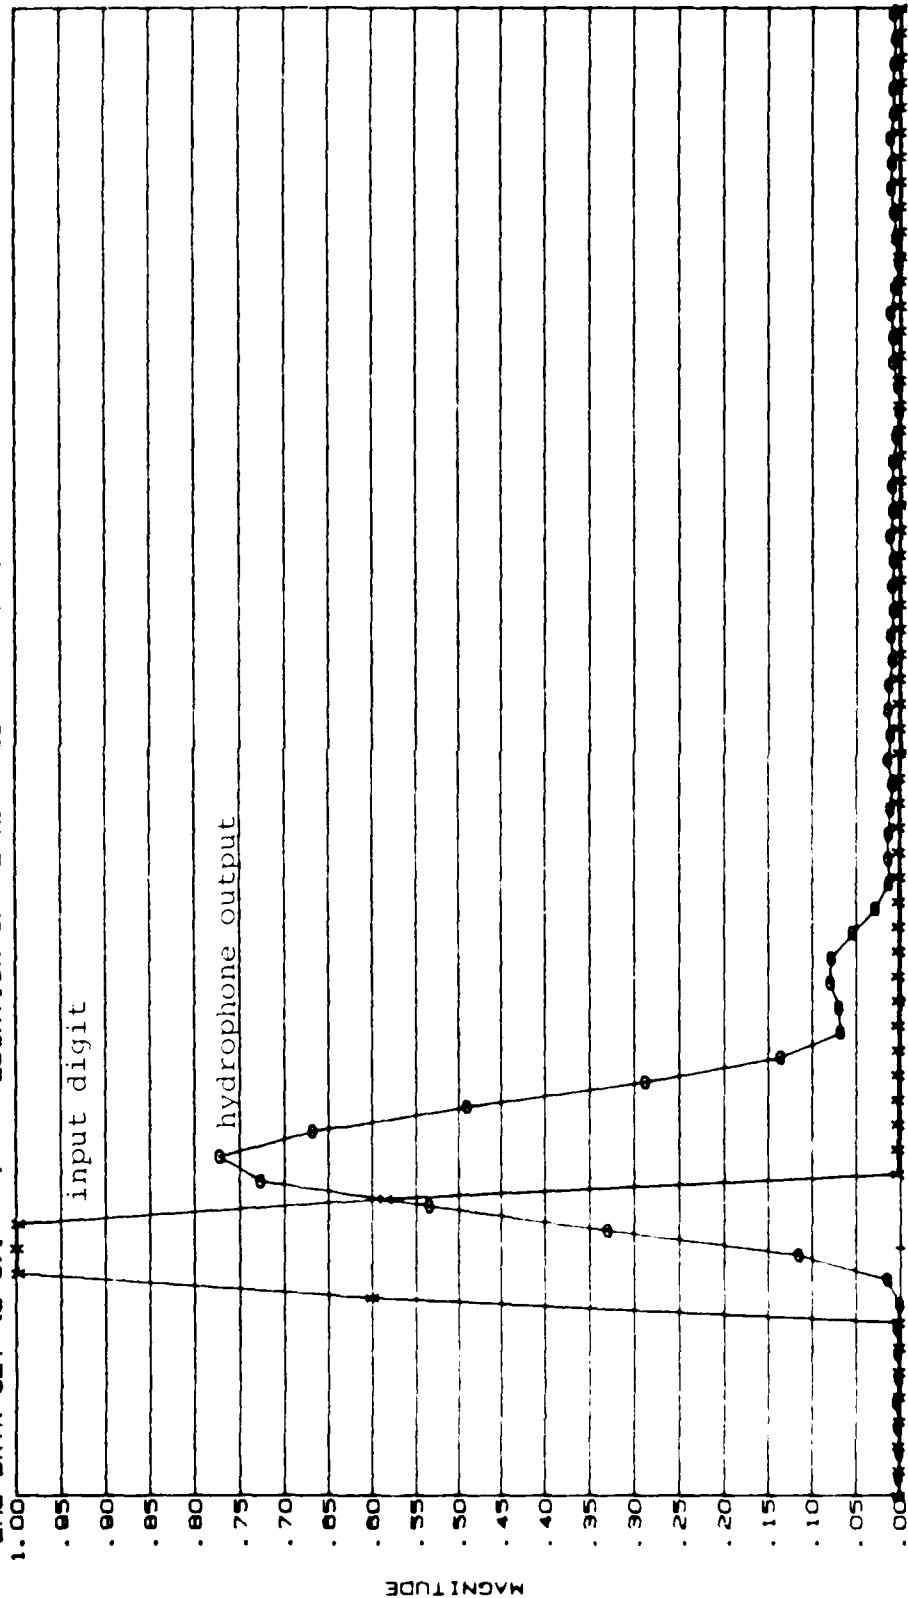


150

CORRELATE

210


Fig. 21. Two cycle digit response, direct path delay removed.
Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 Digit responses ... 3.5v RMS. 300 ft ... 2nd set scaled to 1361778
 DATA SET: 5 DATE: 08/28/85 SOURCE: HLF-5 B
 SEQUENCE LAW: 785 FREQUENCY (Hz): 250
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 8 SAMPLES/DATA SET: 2040
 LOCATION OF PEAK: 108 MAGNITUDE OF PEAK: 988918. MEDIAN VALUE: 1244
 2nd DATA SET (0's): 0 LOCATION OF PEAK: 204 MAGNITUDE OF PEAK: 1399409.

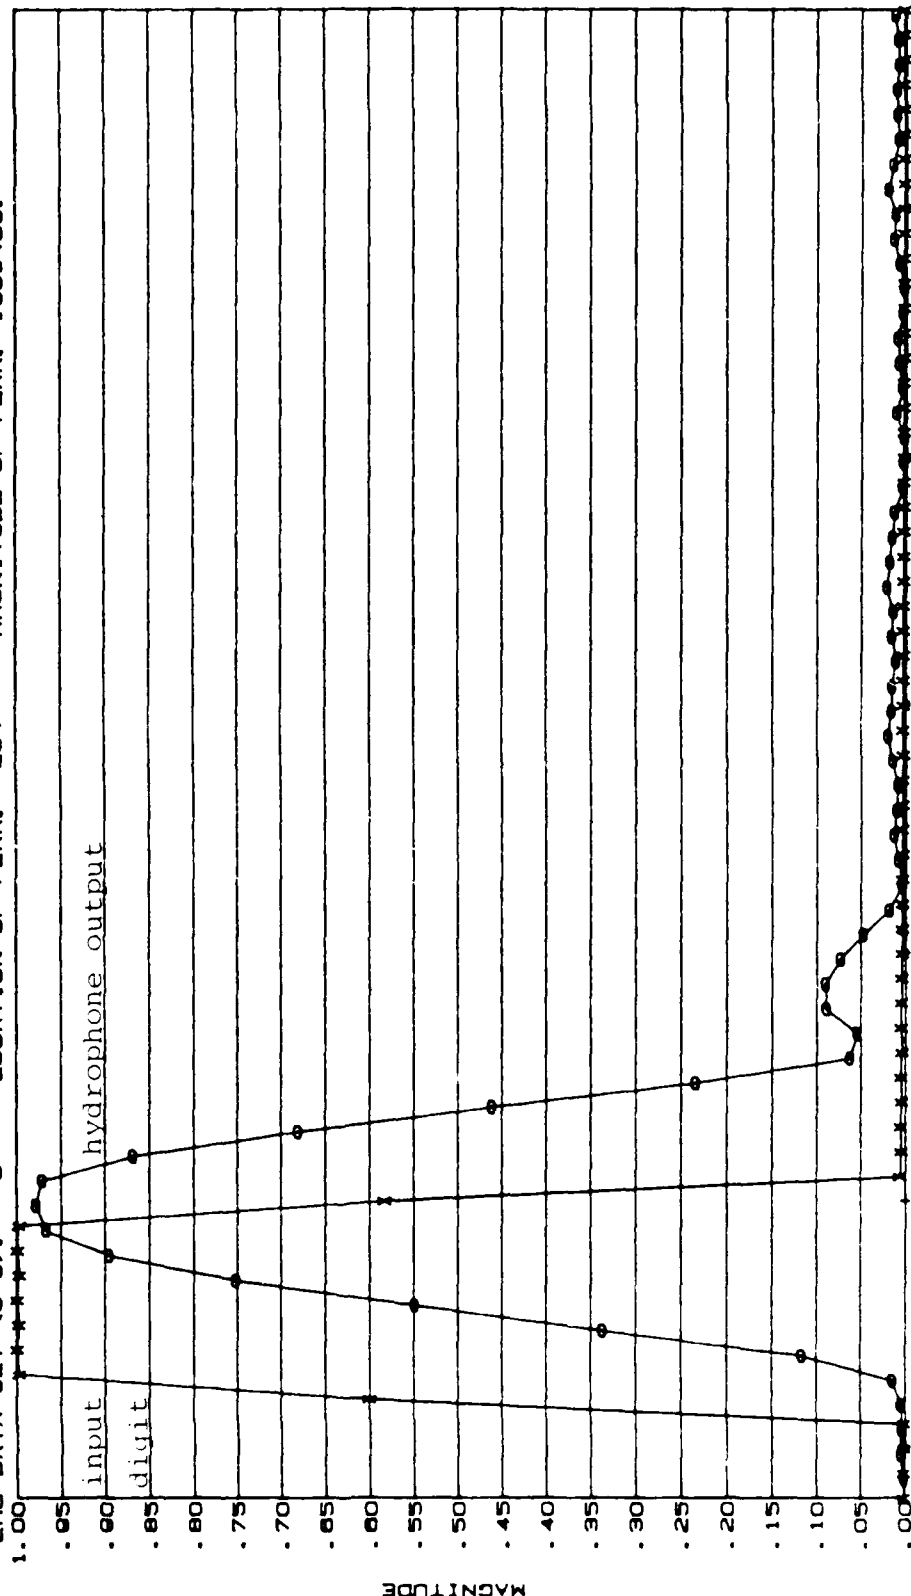

188 CORRELATE 248
 Plot 22. Four cycle digit response, direct path delay removed.
 Drive level = 3.5 vrms.


COOLEY ELECTRONICS LABORATORY
 Digit response ... 3.5v RMS. 300 ft ... 2nd set scaled to 880889
 DATA SET, 7 DATE, 08/28/85 SOURCE, HLF-5 B
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 10 SAMPLES/DATA SET, 4080
 LOCATION OF PEAK, 310 MAGNITUDE OF PEAK, 444191. MEDIAN VALUE, 627
 2nd DATA SET (0's), 8 LOCATION OF PEAK, 922 MAGNITUDE OF PEAK, 880890.

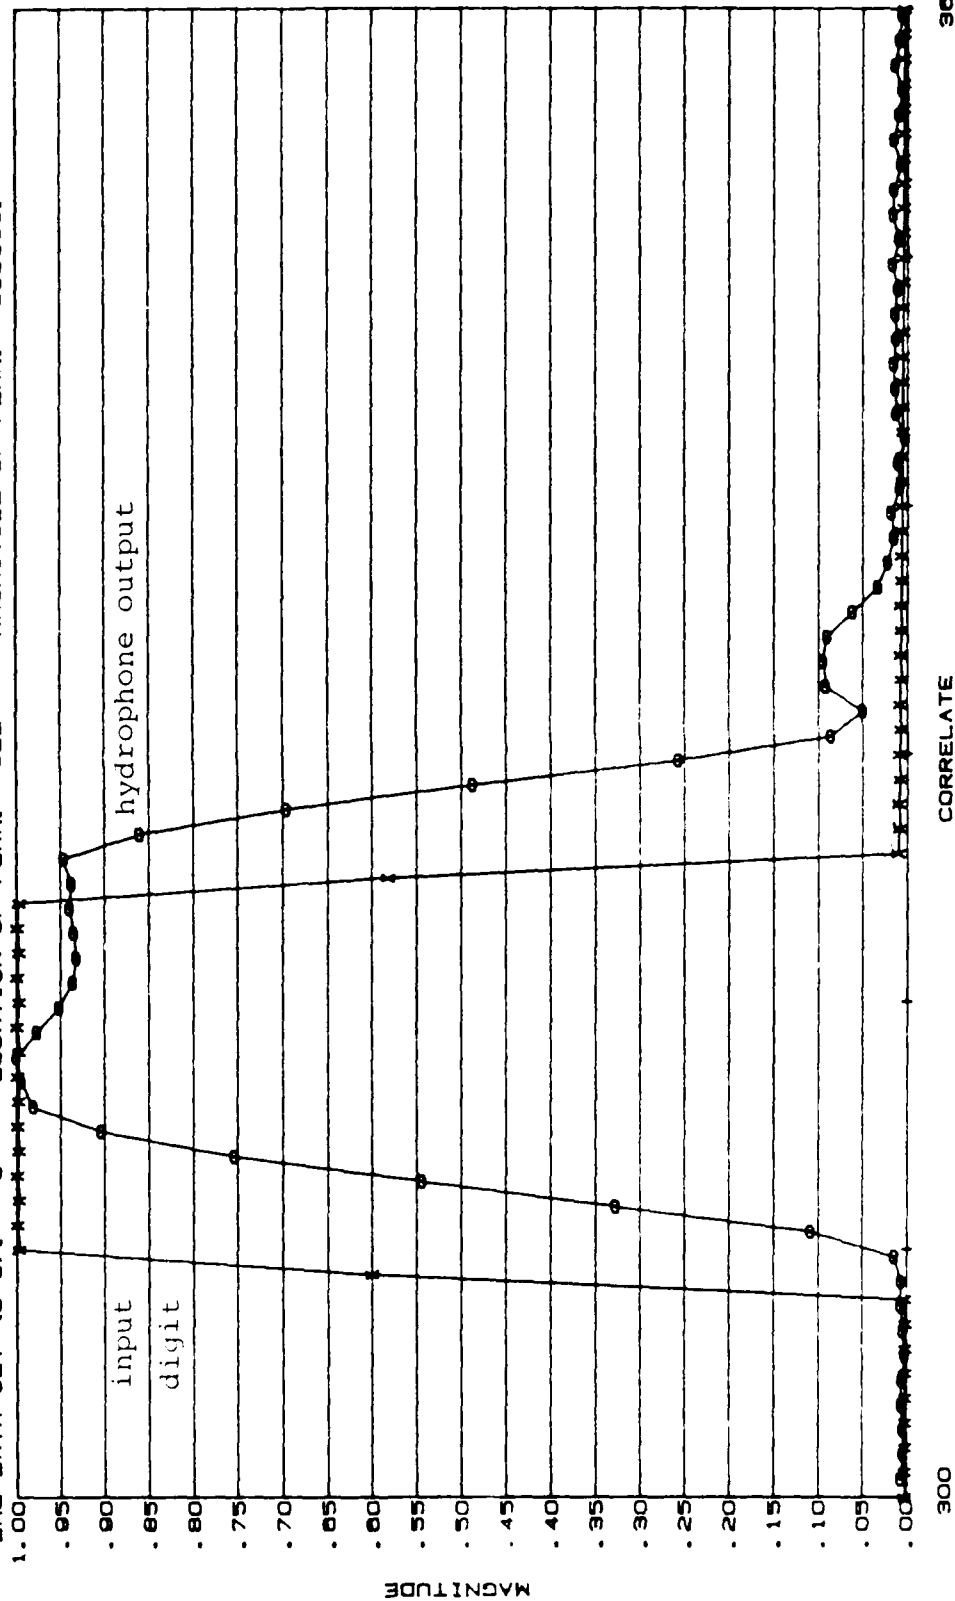

Plot 23. Eight cycle digit response, direct path delay removed.
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT
 DATA SET: 1 DATE: 08/28/85 SOURCE: HLF B
 SEQUENCE LAW: 785 FREQUENCY (Hz): 250 SAMPLES/DIGIT: 2 SAMPLES/DATA SET: 510
 HALF CYCLES/SAMPLE: 1 MAGNITUDE OF PEAK: 3548902. MEDIAN VALUE: 4903
 LOCATION OF PEAK: 0 MAGNITUDE OF PEAK: 10 MAGNITUDE OF PEAK: 1840497.
 2nd DATA SET (0°): 2 LOCATION OF PEAK: 10

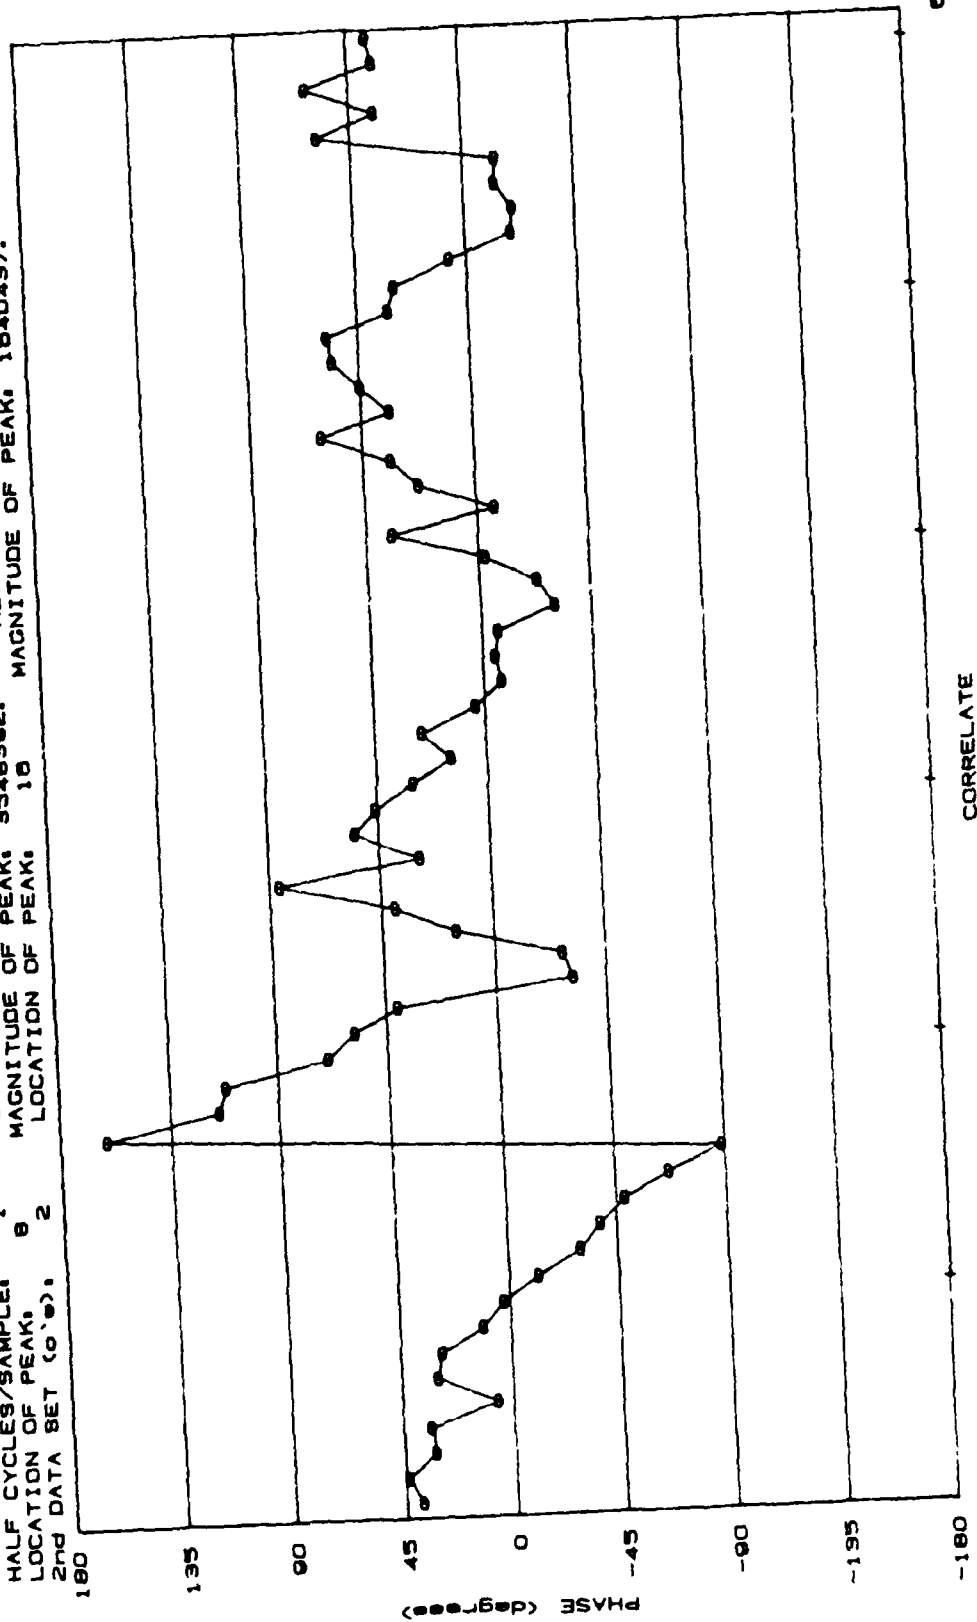


Plot 24. Phase of the one cycle digit response.
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT


DATA SET: 3 DATE: 08/28/85 SOURCE: HLF-5 B
 SEQUENCE LAW: 765 FREQUENCY (Hz): 250 SAMPLES/DATA SET: 1020
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 4 2489
 LOCATION OF PEAK: 180 MAGNITUDE OF PEAK: 1778749. MEDIAN VALUE:
 2ND DATA SET (G's): 4 LOCATION OF PEAK: 188 MAGNITUDE OF PEAK: 2109717.

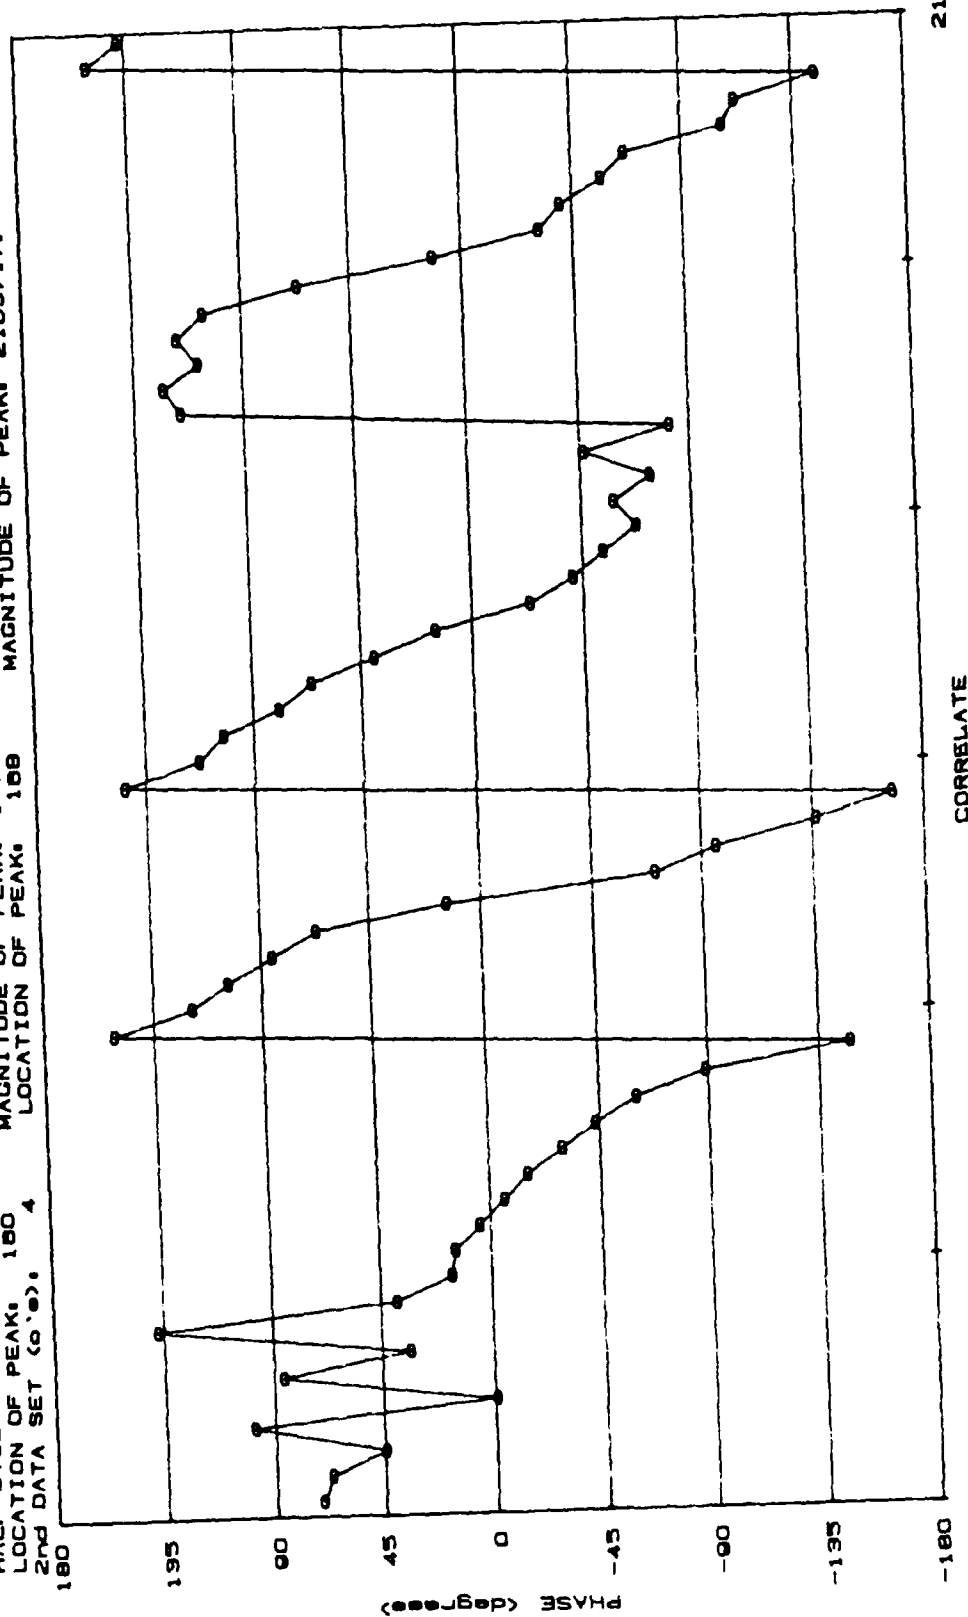

Plot 25. Phase of the two cycle digit response.
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY


PHASE PLOT
 DATA SET, 5 DATE, 08/28/85 SOURCE, HLF-5 B
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250 SAMPLES/DATA SET, 2040
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 MEDIAN VALUE, 1244
 LOCATION OF PEAK, 198 MAGNITUDE OF PEAK, 889318. MAGNITUDE OF PEAK, 1393409.
 2nd DATA SET (a's), 0 LOCATION OF PEAK, 204

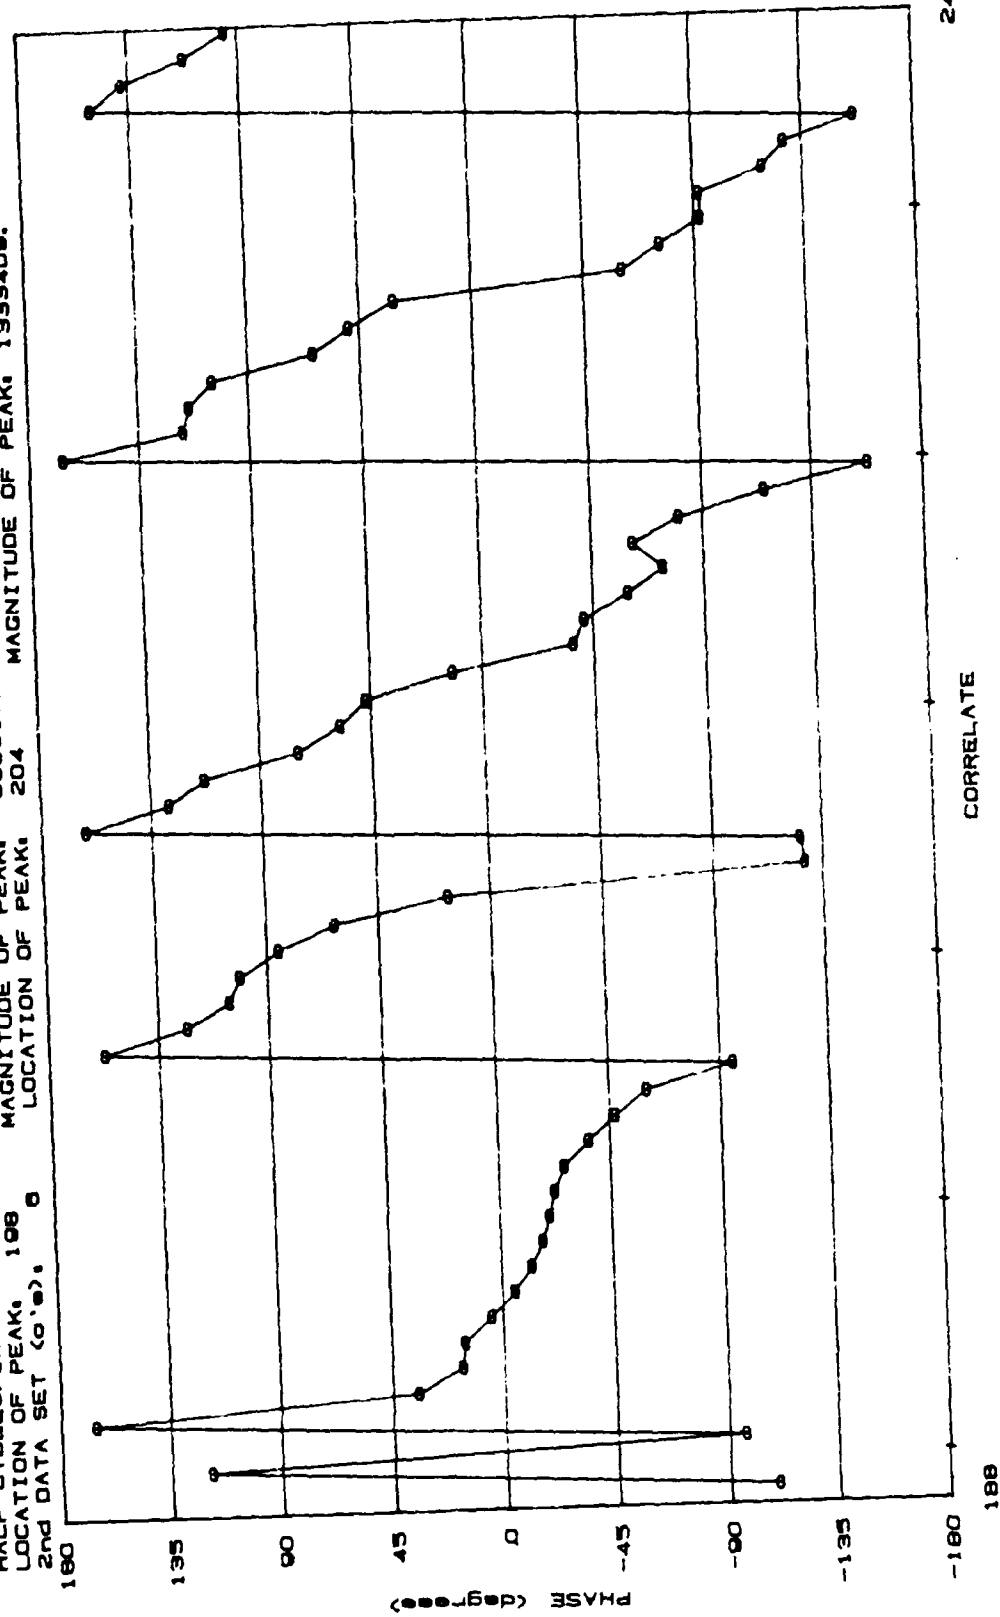

Plot 26. Phase of the four cycle digit response.
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT
 DATA SET: 7 DATE: 08/28/85 SOURCE: HLF-5 B
 SEQUENCE LAW: 705 FREQUENCY (Hz): 250 SAMPLES/DATA SET: 4080
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 10 MEDIAN VALUE: 027
 LOCATION OF PEAK: 310 MAGNITUDE OF PEAK: 44131. MAGNITUDE OF PEAK: 080800.
 2nd DATA SET (0.0): 8 LOCATION OF PEAK: 322

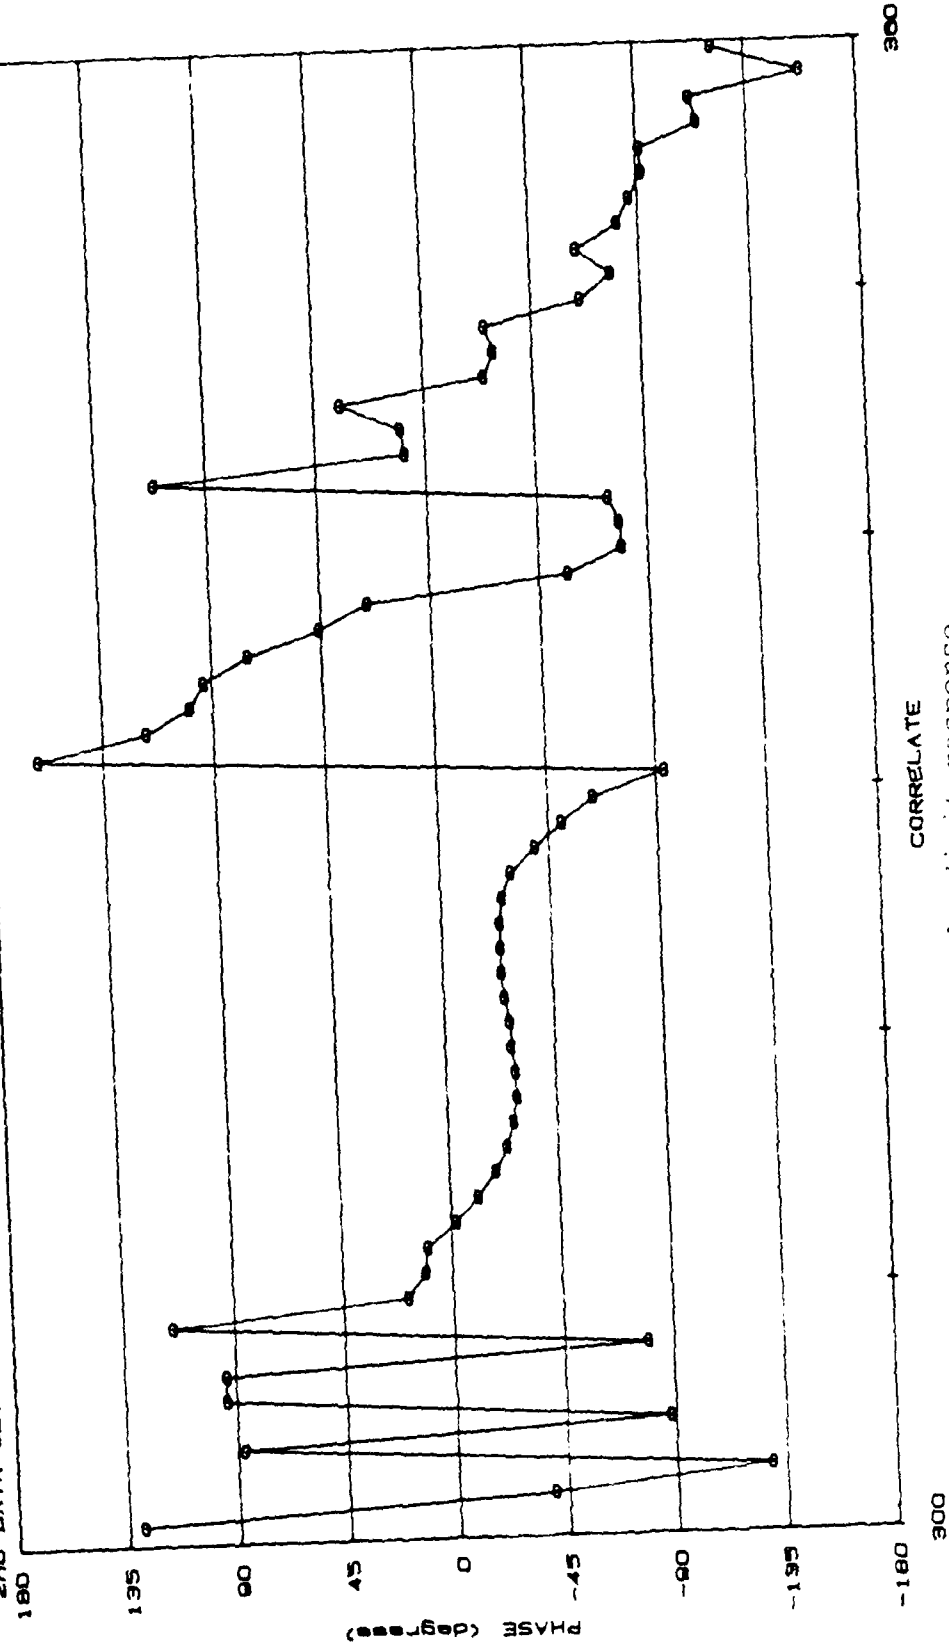

Plot 27. Phase of the eight cycle digit response.
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

FFT ... ROTATED BY 250

DATA SET, 2 DATE, 08/28/85 SOURCE, HLF 8

SEQUENCE LAW, 785 FREQUENCY (Hz), 250


HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 2

LOCATION OF PEAK, 10 MAGNITUDE OF PEAK, 1040497.

SAMPLES/DATA SET, 510

MEDIAN VALUE,

95951

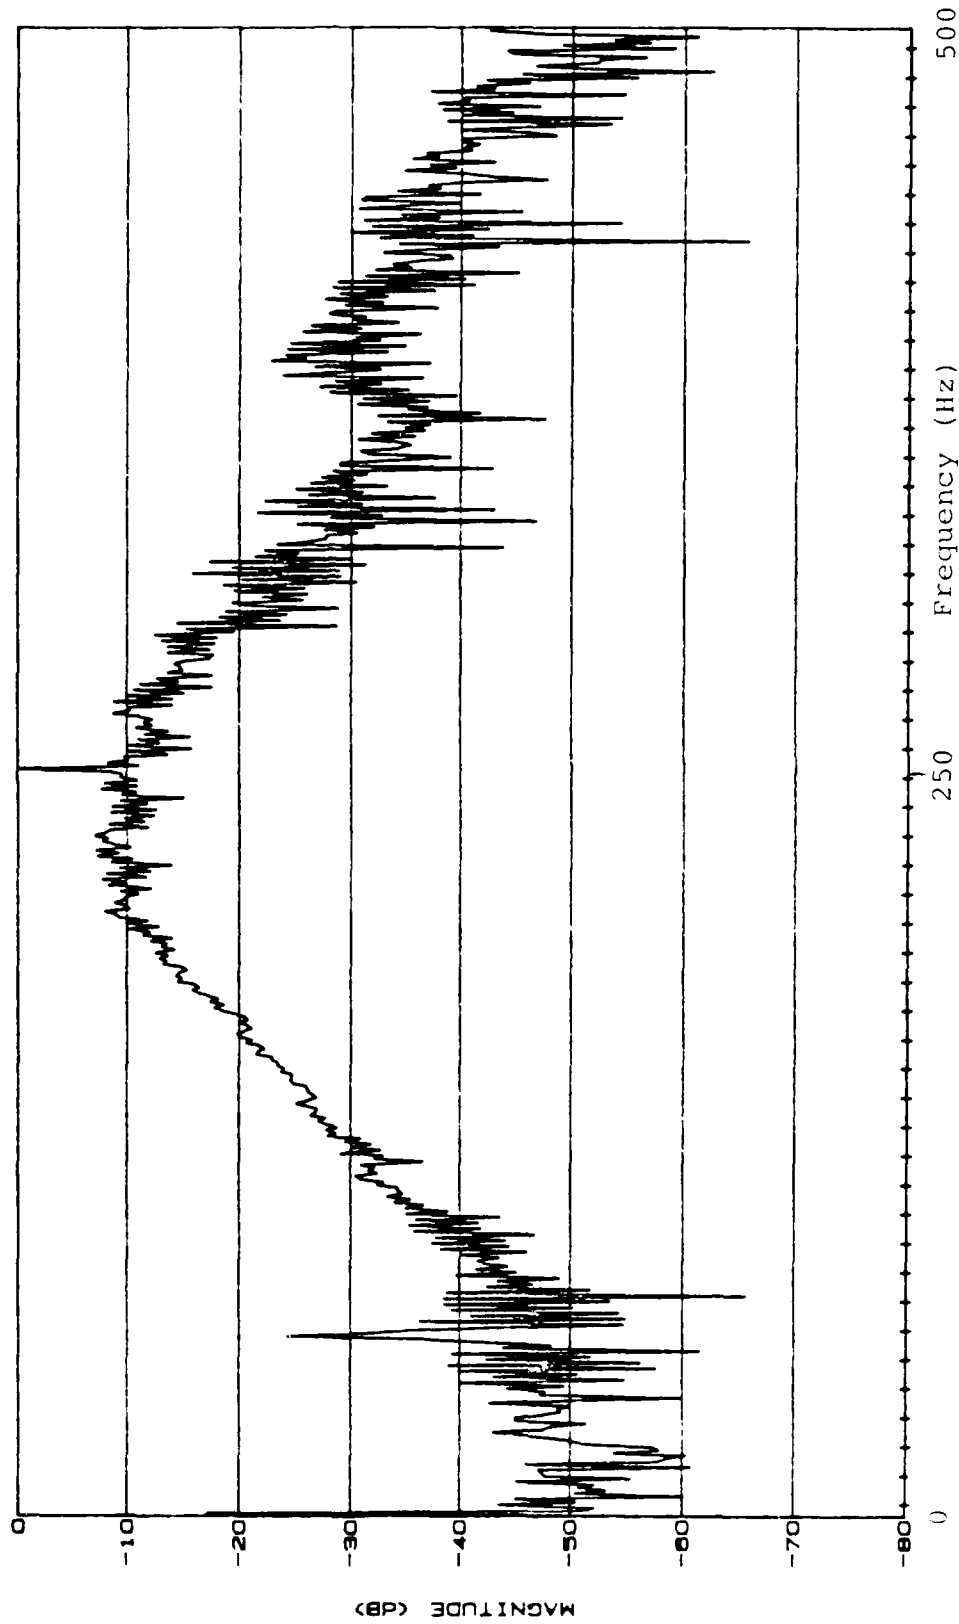

Plot 28. DFT of the one cycle digit response.

Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

FFT ... ROTATED BY 512


DATA SET, 4 DATE, 08/28/85 SOURCE, HLF-5 B

SEQUENCE LAW, 765 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4

LOCATION OF PEAK, 168 MAGNITUDE OF PEAK, 2103717, SAMPLES/DATA SET, 1020

MEDIAN VALUE, 7981

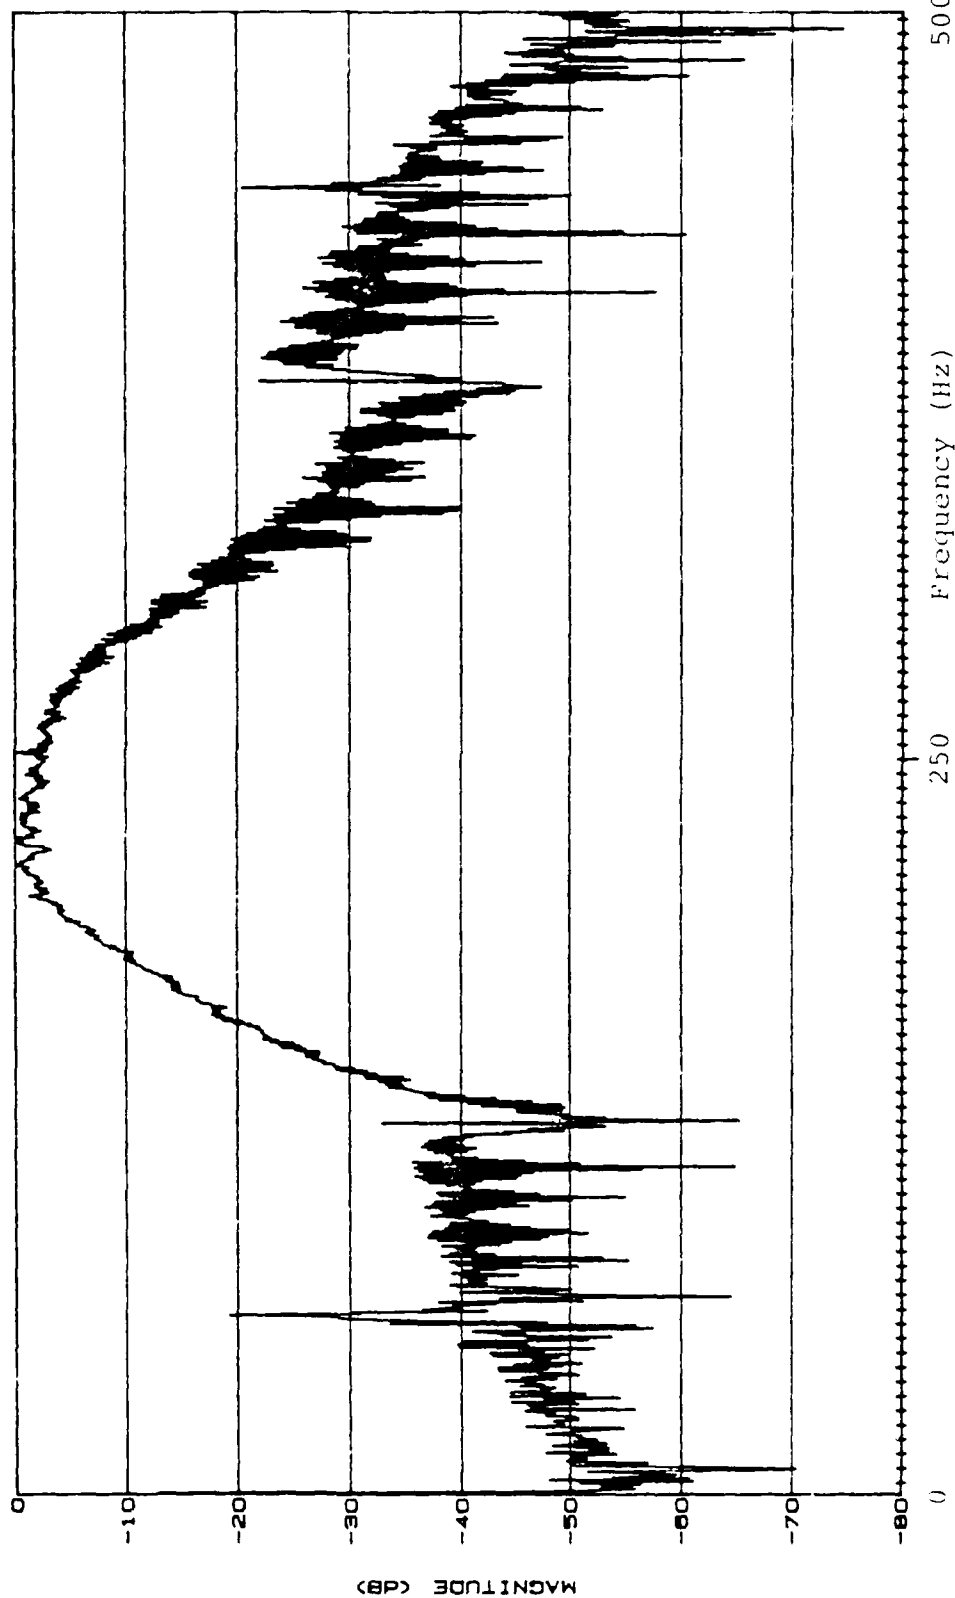

Plot 29. DFT of the two cycle digit response.

Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

FFT ... ROTATED BY 1024

DATA SET: 6 DATE: 08/28/85 SOURCE: HLF-5 B


SEQUENCE LAW: 705 FREQUENCY (Hz): 250

HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 8

LOCATION OF PEAK: 204 MAGNITUDE OF PEAK: 1999406. SAMPLES/DATA SET: 2040

MEDIAN VALUE:

4441

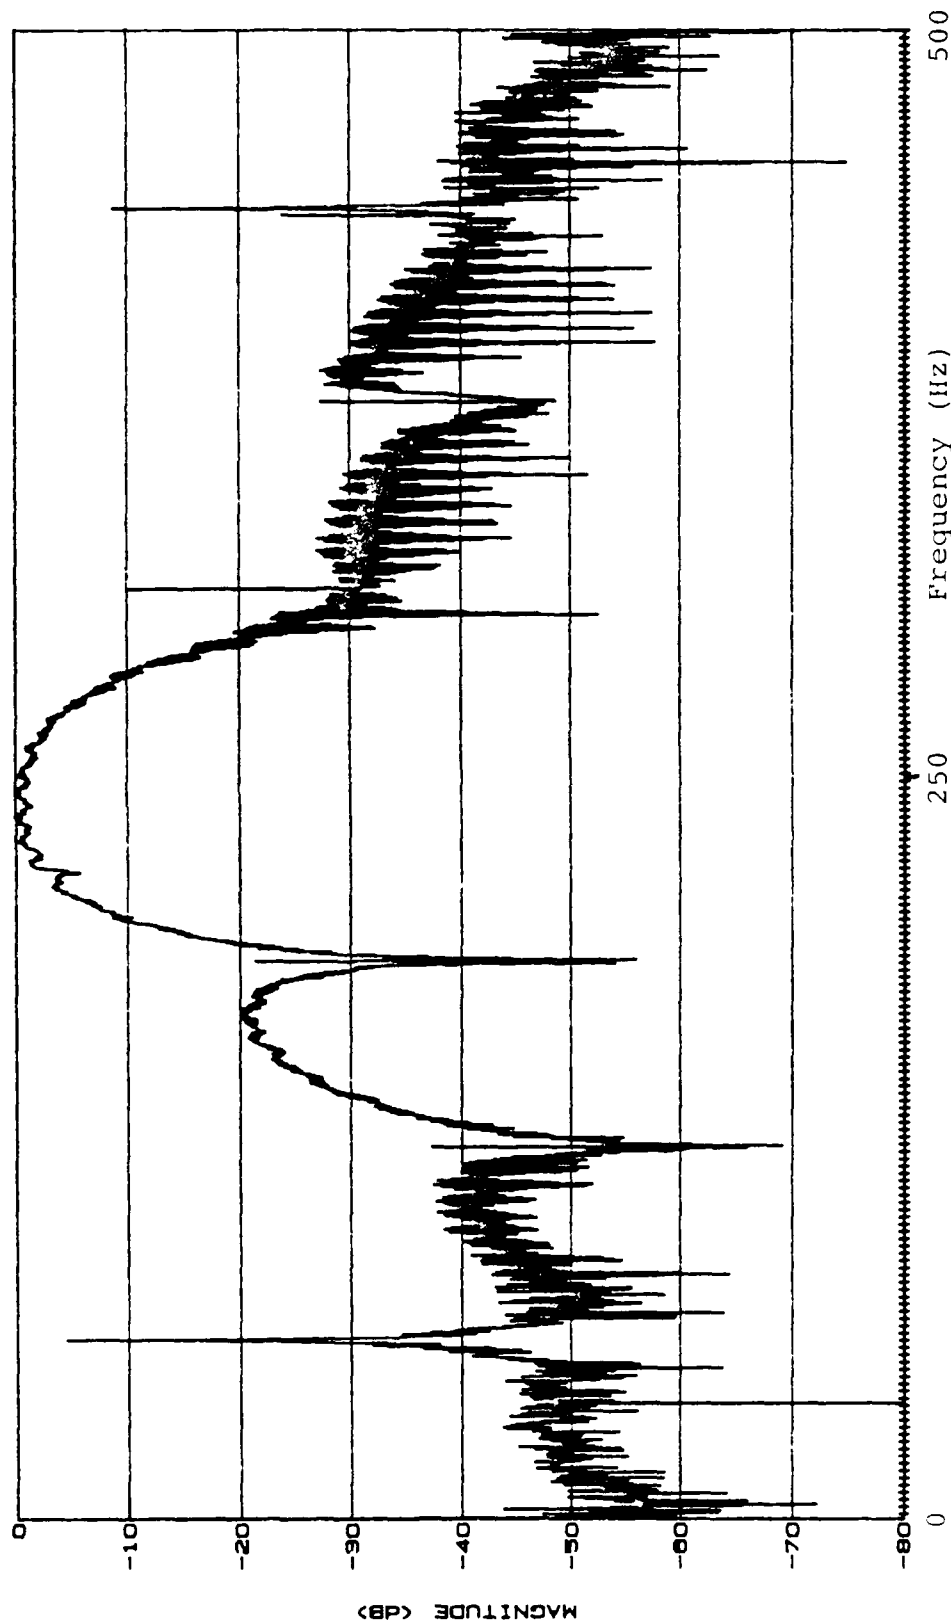

Plot 30. DFT of the four cycle digit response.

Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

FFT ... ROTATED BY 2048

DATA SET, 8 DATE, 08/28/85 SOURCE, HLF-5 B


SEQUENCE LAW, 765 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 18

LOCATION OF PEAK, 922 MAGNITUDE OF PEAK, 680860.

SAMPLES/DATA SET, 4080


MEDIAN VALUE, 1548

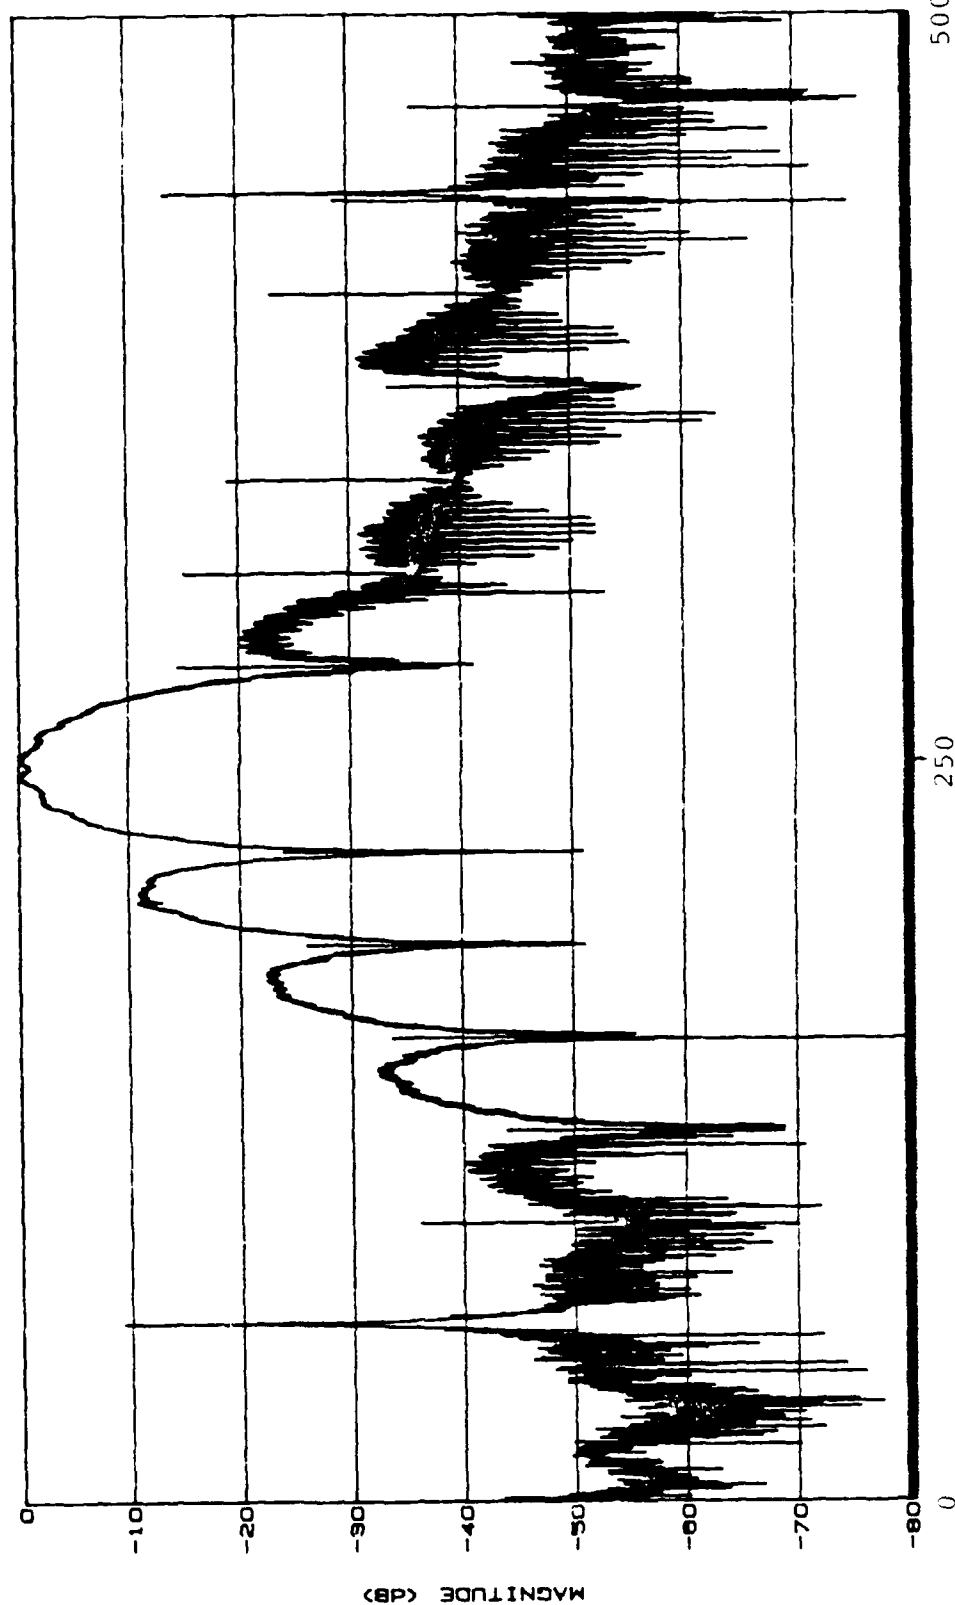

Plot 31. DFT of the eight cycle digit response.
Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

Full data set rotated by 90. Time = 1.02 sec. Scaled to 5447112
 DATA SET. 2 DATE. 08/28/85 SOURCE. HLF B
 SEQUENCE LAW. 785 FREQUENCY (Hz). 250
 HALF CYCLES/SAMPLE. 1 SAMPLES/DIGIT. 2 SAMPLES/DATA SET. 510
 LOCATION OF PEAK. 10 MAGNITUDE OF PEAK. 1040437. MEDIAN VALUE. 35351

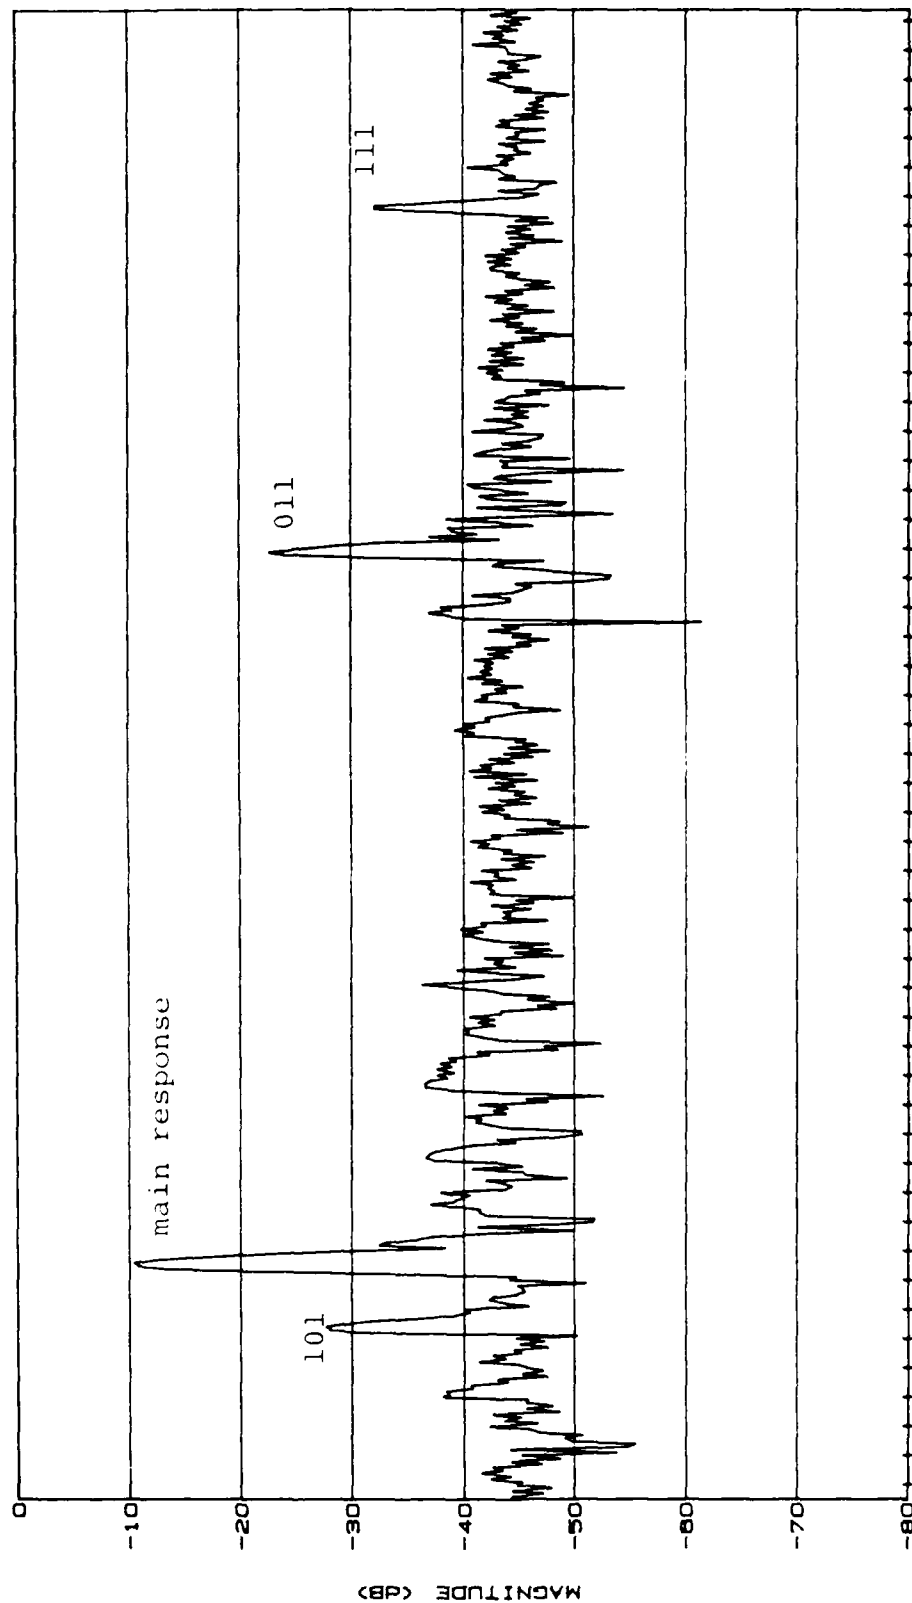


445

CORRELATE

954

Plot 32. Full period of one cycle digit response (dB).
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 1st half of data set. Time = 1.02 sec. Scaled to 2723550.
 DATA SET, 4 DATE, 08/28/85 SOURCE, HLF-5 B
 SEQUENCE LAW, 765 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4 SAMPLES/DATA SET, 1020
 LOCATION OF PEAK, 168 MAGNITUDE OF PEAK, 2103717. MEDIAN VALUE, 7381

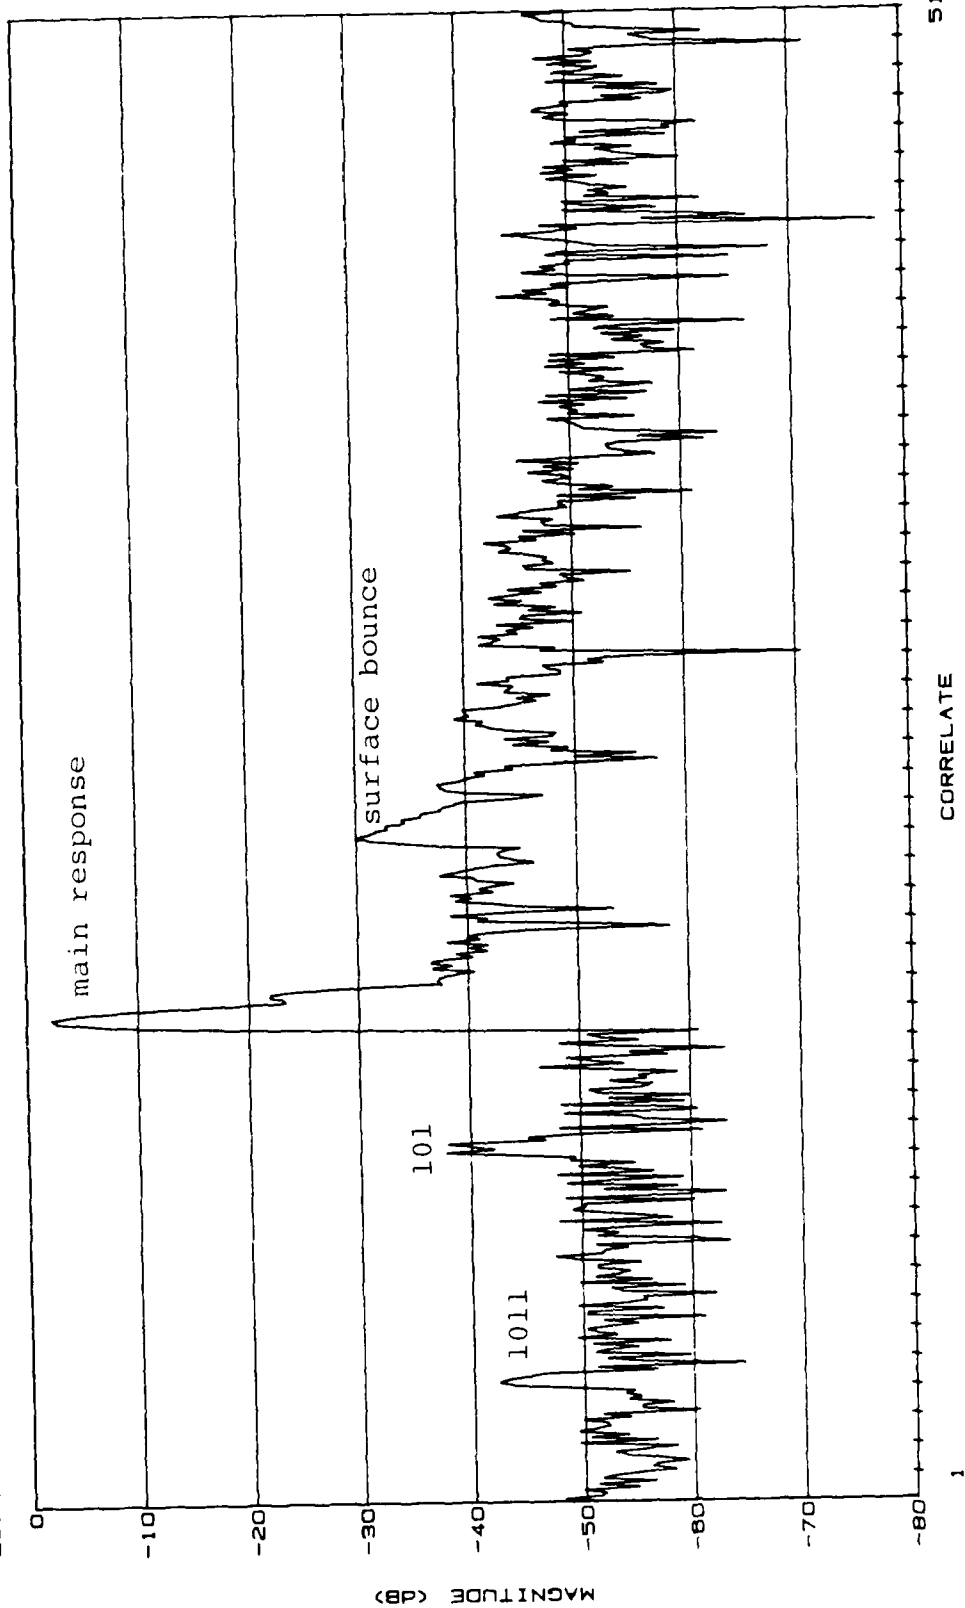

Plot 33. First half of full period two cycle digit response (dB).
 Drive level = 3.5 vims.

COOLEY ELECTRONICS LABORATORY

2nd half of data set. Time = 1.02 sec. Scaled to 2723556


DATA SET, 4 DATE, 08/28/85 SOURCE, HLF-5 B

SEQUENCE LAW, 765 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4

LOCATION OF PEAK, 188 MAGNITUDE OF PEAK, 2103717. SAMPLES/DATA SET, 1020

MEDIAN VALUE, 7381

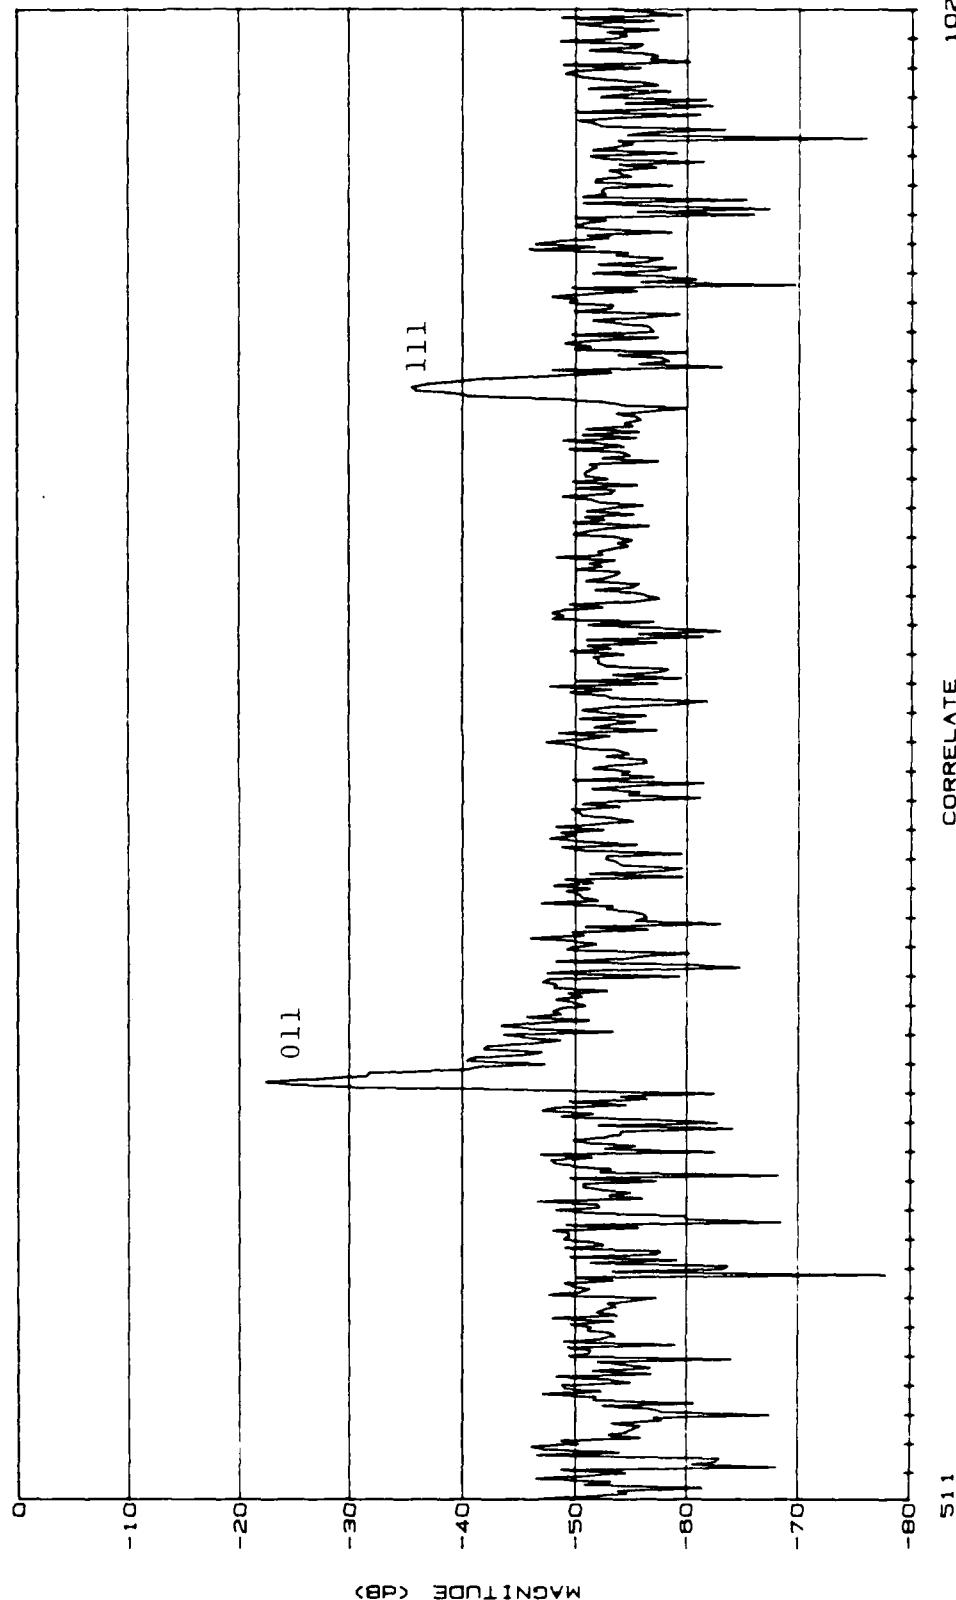

Plot 34. Second half of full period two cycle digit response (dB).

Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY

1st quarter of source data set. Time = 1.02 sec.

DATA SET, 5 DATE, 08/28/85 SOURCE, HLF-5 B


SEQUENCE LAW, 705 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8

LOCATION OF PEAK, 108 MAGNITUDE OF PEAK, 888918.

SAMPLES/DATA SET, 2040


MEDIAN VALUE, 1244

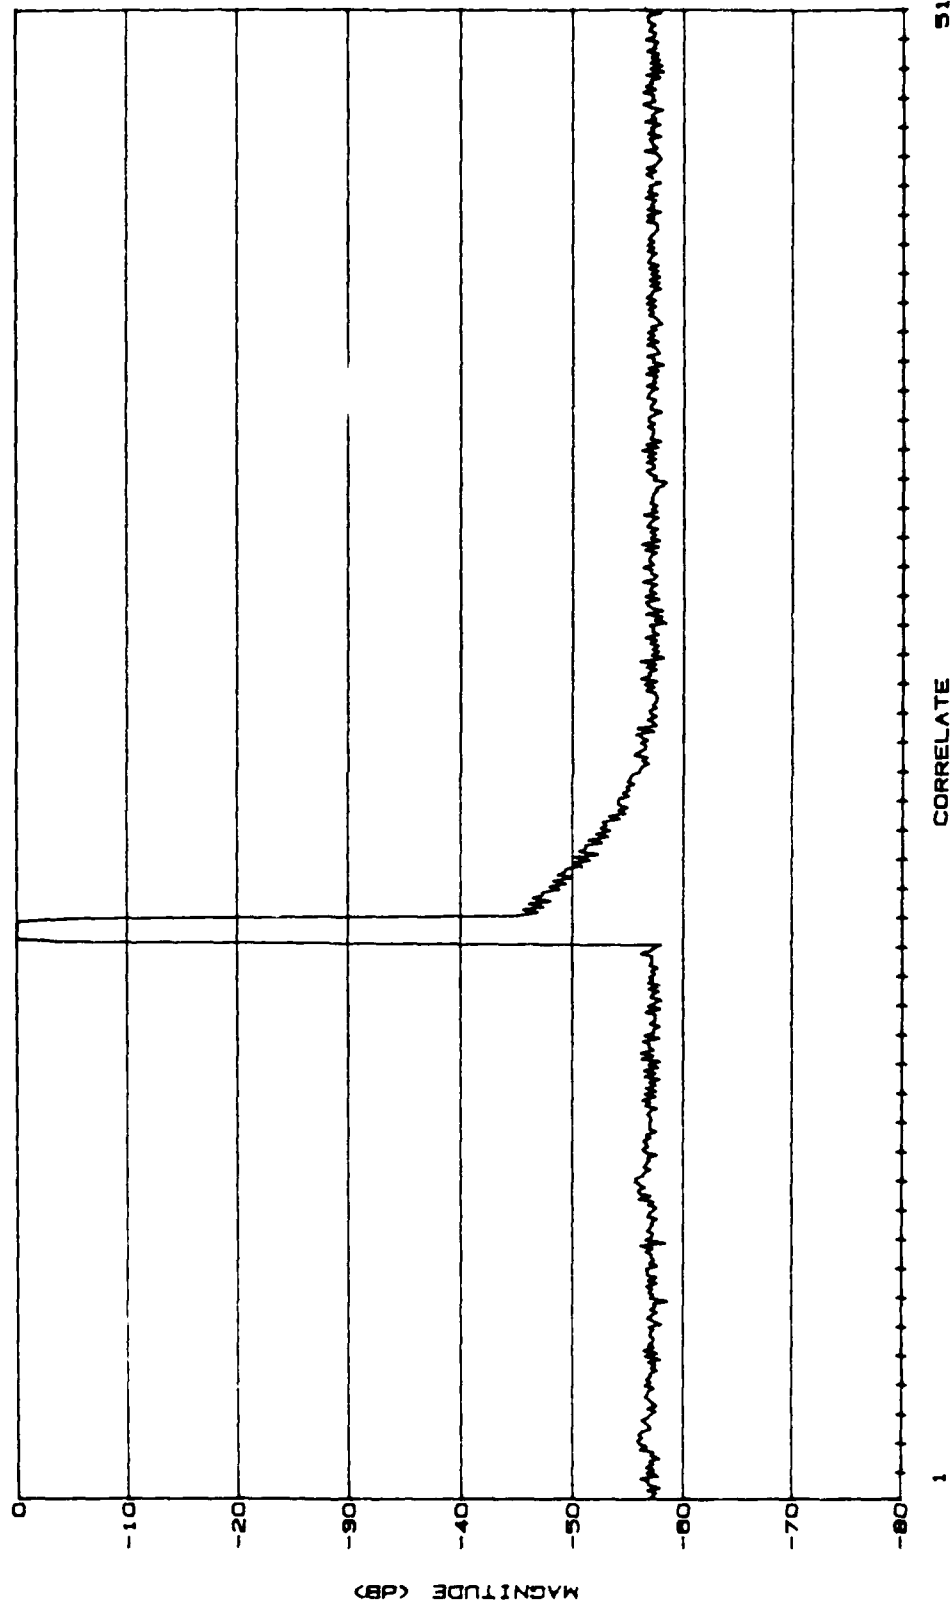

Plot 39. Drive waveform for four cycle digit measurement (dB).


Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 1st quarter of data set. Time = 1.02 sec. Scaled to 1361778.
 DATA SET, 8 DATE, 08/28/85 SOURCE, HLF-5 B
 SEQUENCE LAW, 765 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 SAMPLES/DATA SET, 2040
 LOCATION OF PEAK, 204 MAGNITUDE OF PEAK, 1333409. MEDIAN VALUE, 4441

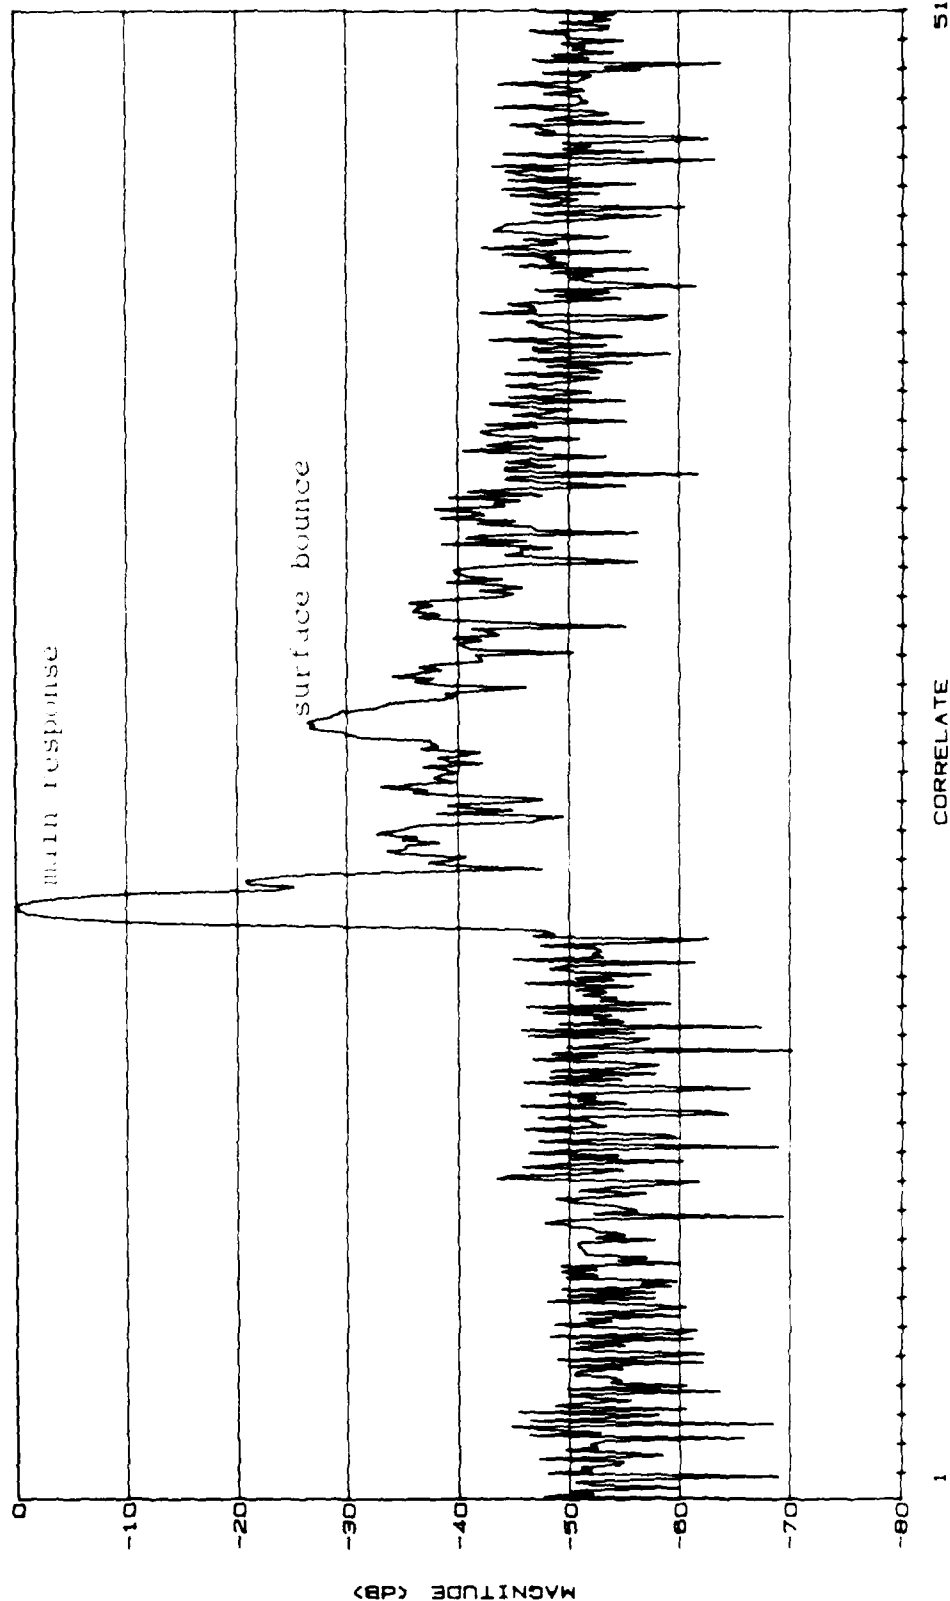

Plot 36. First quarter of full period four cycle digit response (dB).
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 2nd quarter of data set. Time = 1.02 sec. Scaled to 1301778
 DATA SET, 8 DATE: 08/28/85 SOURCE: HLF-5 B
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 8 SAMPLES/DATA SET, 2040
 LOCATION OF PEAK, 204 MAGNITUDE OF PEAK, 1333408. MEDIAN VALUE, 4441

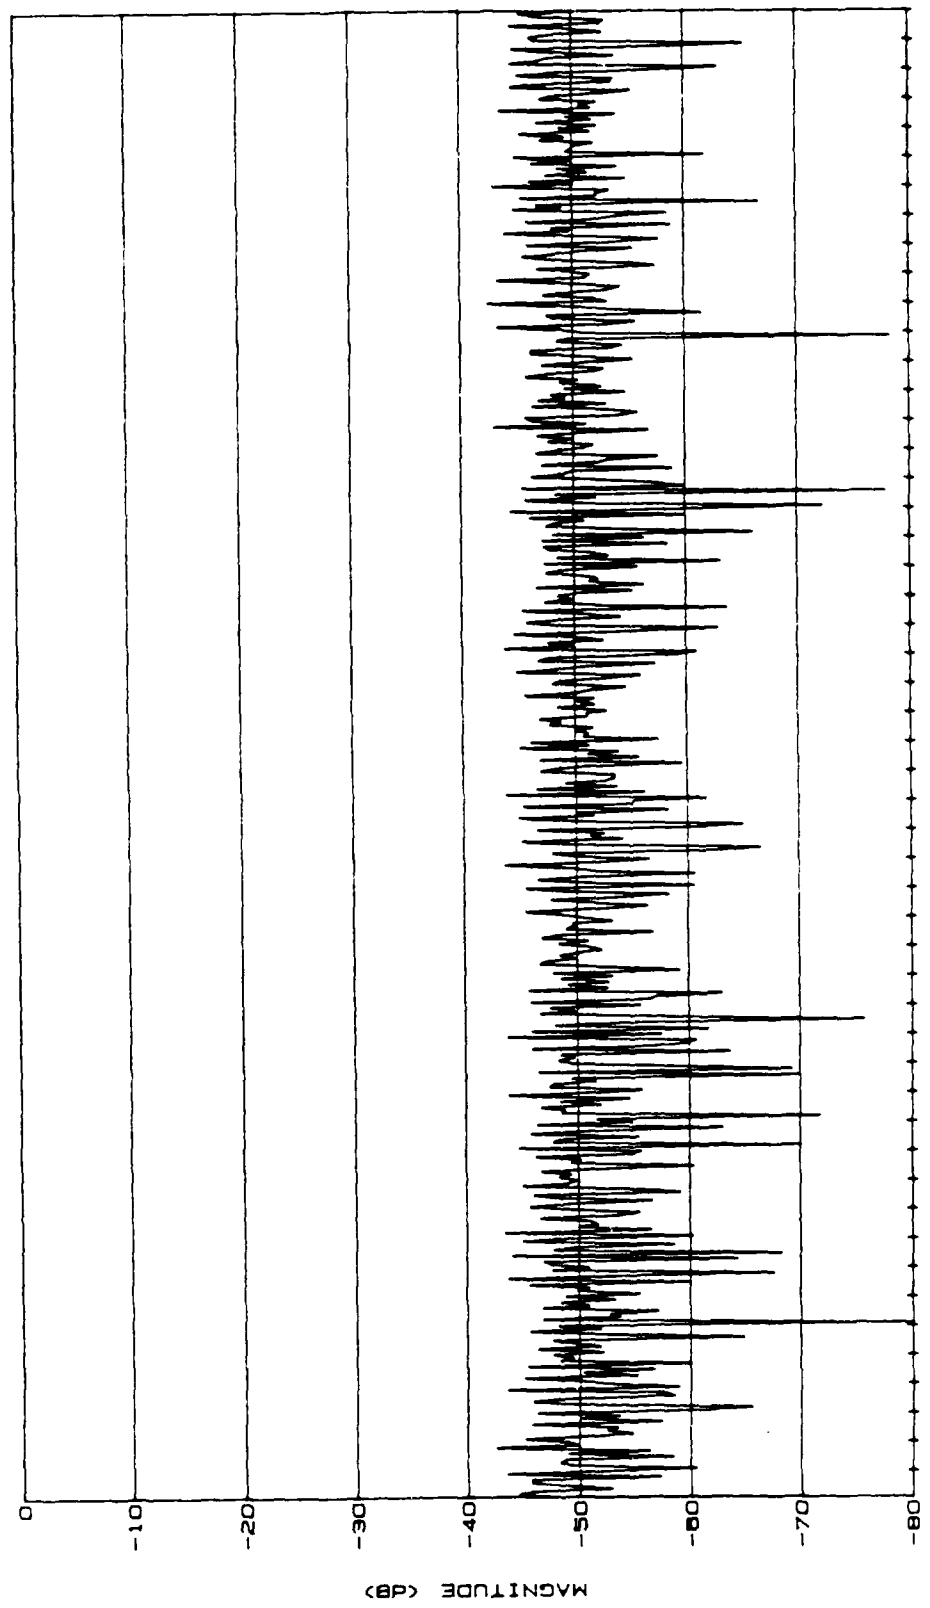

511 CORRELATE
 Plot 37. Second quarter of full period four cycle digit response (dB).
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY


3rd quarter of data set. Time = 1.02 sec. Sealed to 1301778

DATA SET: 8 DATE: 08/28/85 SOURCE: HLF-5 B

SEQUENCE LAW: 705 FREQUENCY (Hz): 250


HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 8 SAMPLES/DATA SET: 2040

LOCATION OF PEAK: 204 MAGNITUDE OF PEAK: 1393409. MEDIAN VALUE: 4441

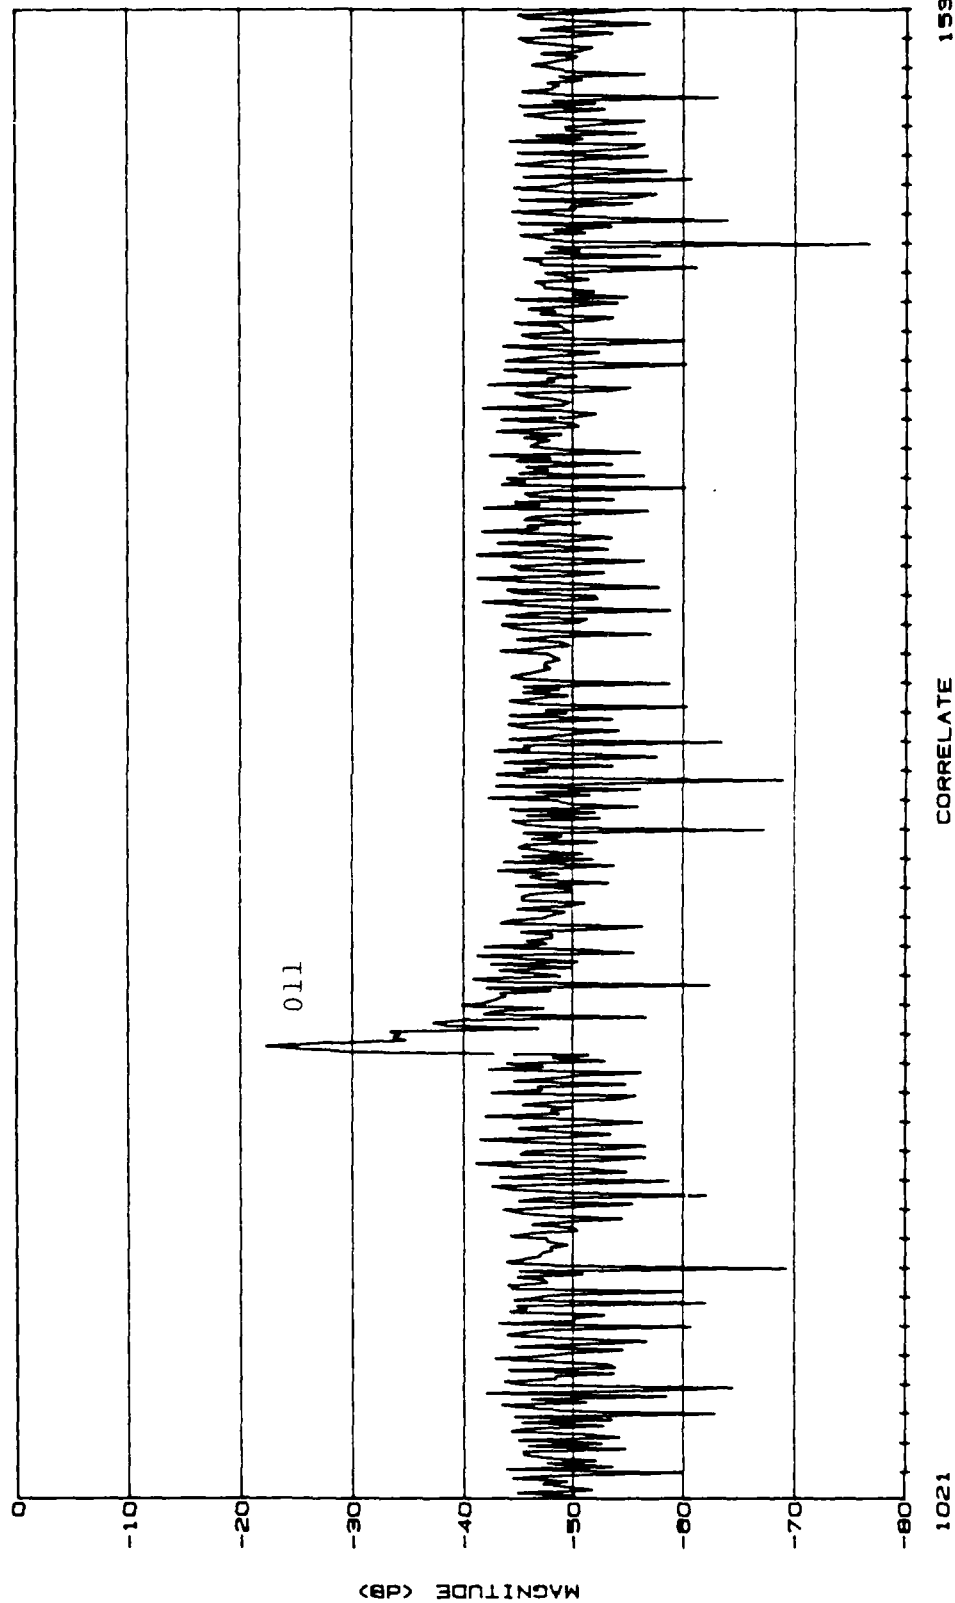


Plot 38. Third quarter of full period four cycle digit response (dB).
Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 4th quarter of data set. Time = 1.02 sec. Scaled to 1301778
 DATA SET. 8 DATE: 08/28/85 SOURCE: HLF-5 B
 SEQUENCE LAW. 705 FREQUENCY (Hz). 250
 HALF CYCLES/SAMPLE. 1 SAMPLES/DIGIT. 8 SAMPLES/DATA SET. 2040
 LOCATION OF PEAK. 204 MAGNITUDE OF PEAK. 1339400. MEDIAN VALUE. 4441

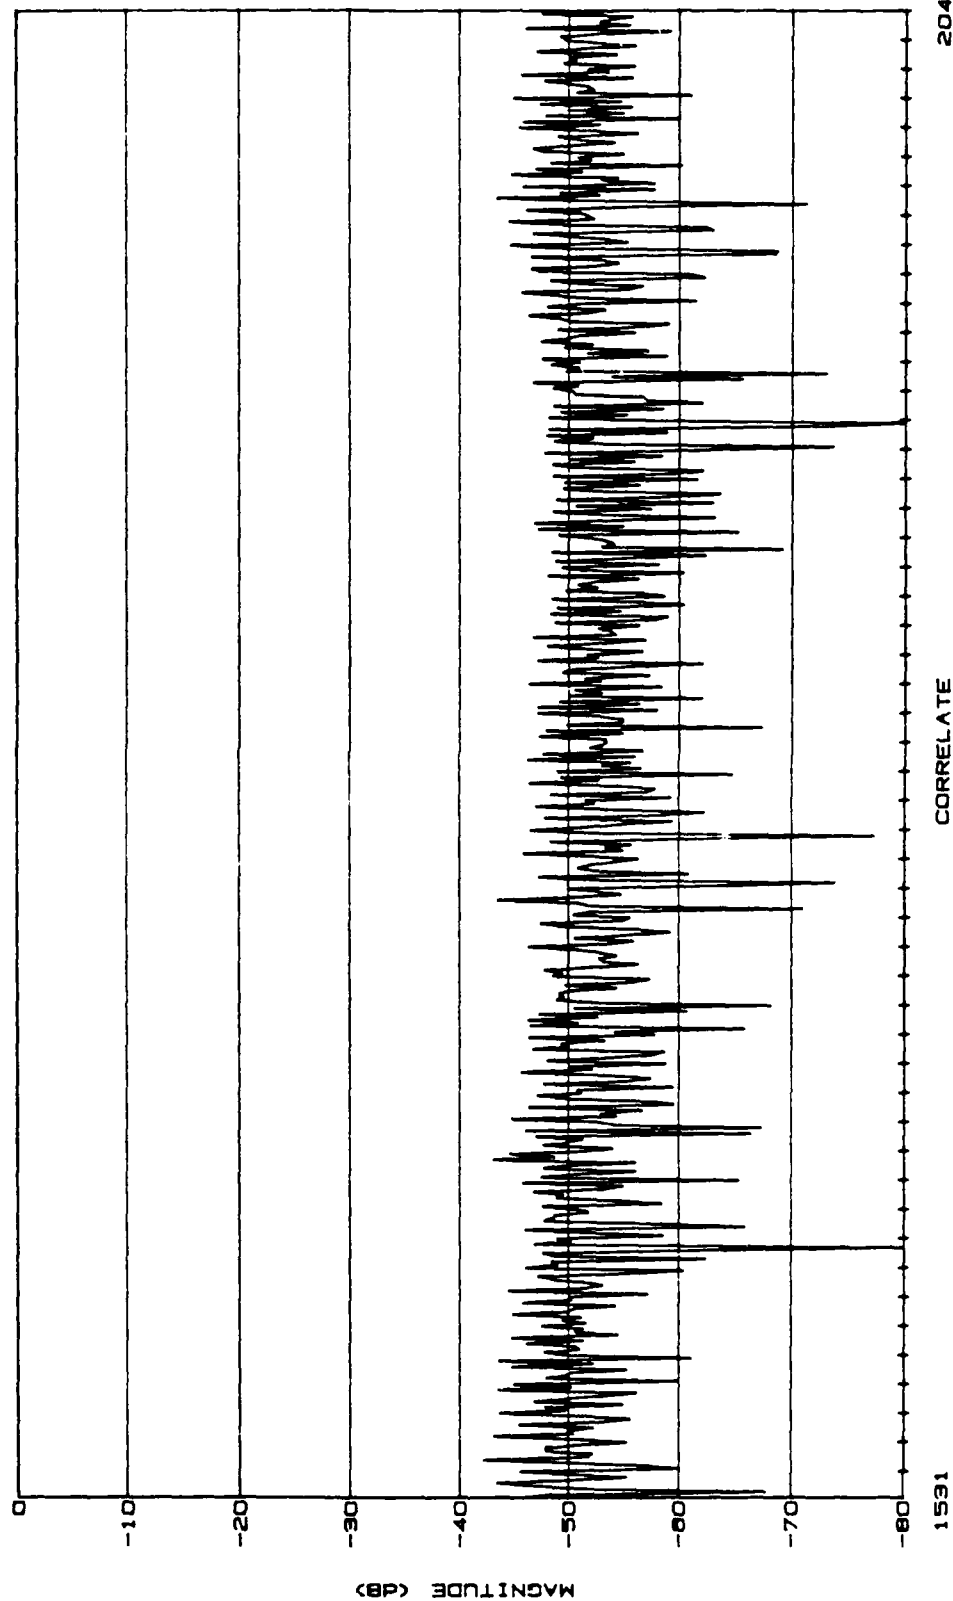

Plot 39. Fourth quarter of full period four cycle digit response (dB).
 Drive level = 3.5 vrms.

COOLEY ELECTRONICS LABORATORY
 Digit response ... 3.5v RMS, 448 ft. raised phone ... scale: 5447112
 DATA SET, 15 DATE: 08/28/85 SOURCE: HLF-5 C
 SEQUENCE LAW, 785 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4 SAMPLES/DATA SET, 1020
 LOCATION OF PEAK, 040 MAGNITUDE OF PEAK, 7080861. MEDIAN VALUE, 0129
 2nd DATA SET (0's), 10 LOCATION OF PEAK, 054 MAGNITUDE OF PEAK, 4205086.

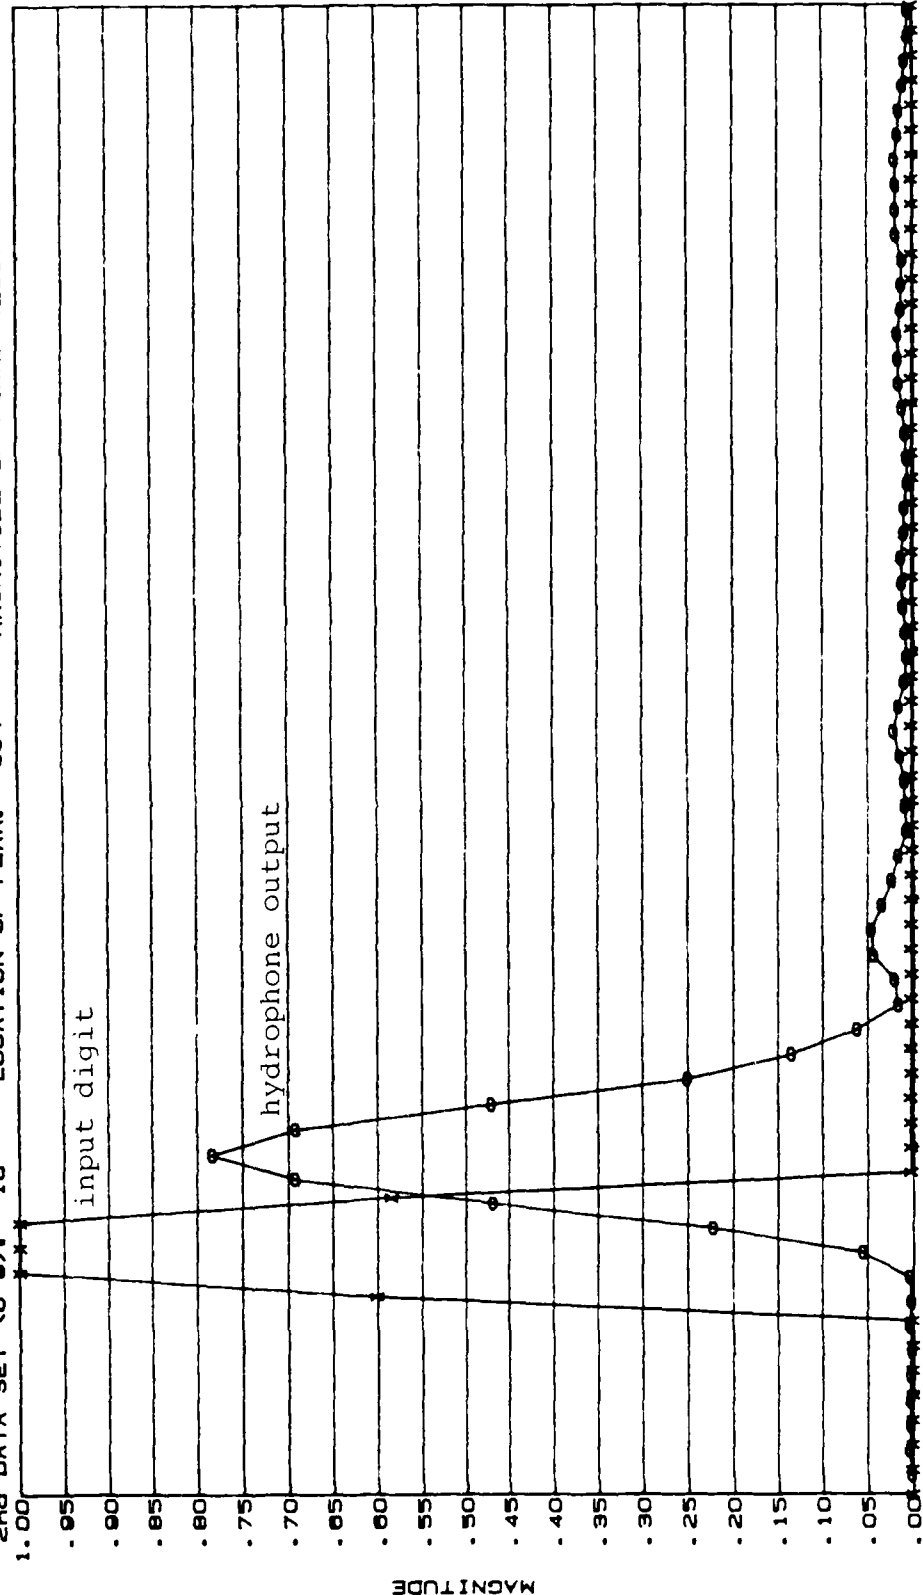

000

CORRELATE


000

Plot 40. Two cycle digit response, direct path delay removed.

Source lowered to 446 feet.

COOLEY ELECTRONICS LABORATORY

PHASE PLOT
 DATA SET: 15 DATE: 08/28/85 SOURCE: HLF-5 C
 SEQUENCE LAW: 705 FREQUENCY (Hz): 250
 HALF CYCLES/SAMPLE: 1 SAMPLES/DIGIT: 4 SAMPLES/DATA SET: 1020
 LOCATION OF PEAK: 040 MAGNITUDE OF PEAK: 7080801. MEDIAN VALUE: 0129
 2nd DATA SET (0's): 10 LOCATION OF PEAK: 054 MAGNITUDE OF PEAK: 4205080.

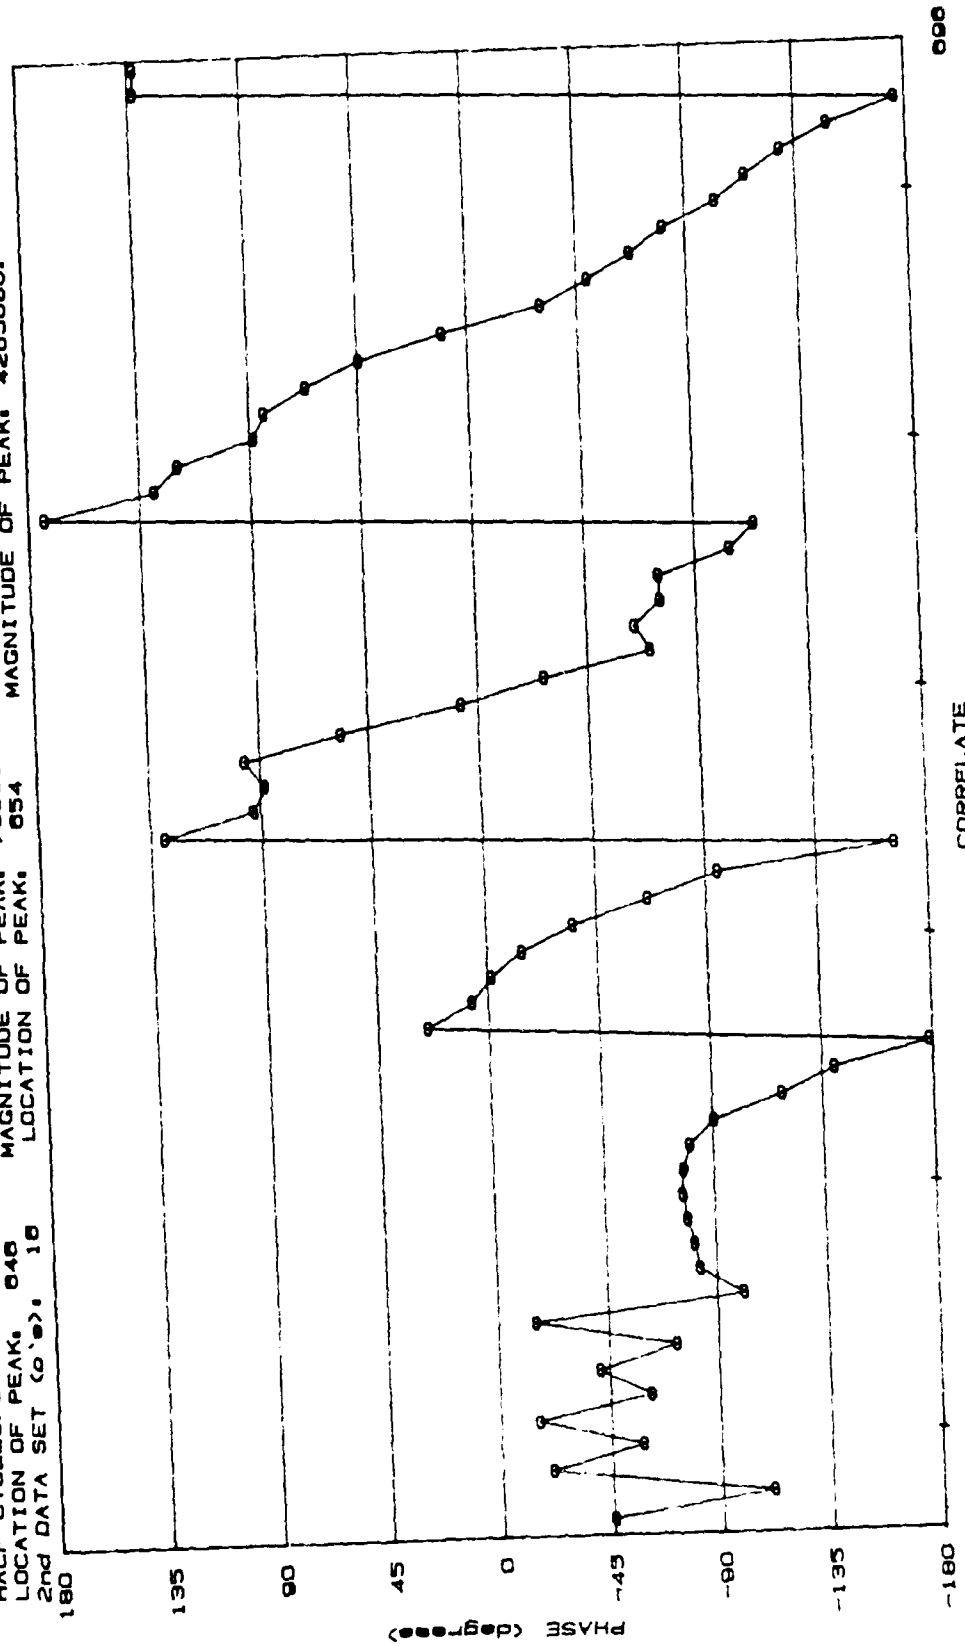

Plot 41. Phase of the two cycle digit response.
 Source lowered to 446 feet.

COOLEY ELECTRONICS LABORATORY

FFT ... ROTATED BY 512

DATA SET, 16 DATE, 08/28/85 SOURCE, HLF-5 C


SEQUENCE LAW, 785 FREQUENCY (Hz), 250

HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4

LOCATION OF PEAK, 834 MAGNITUDE OF PEAK, 4265886. SAMPLES/DATA SET, 1020

MEDIAN VALUE,


10912

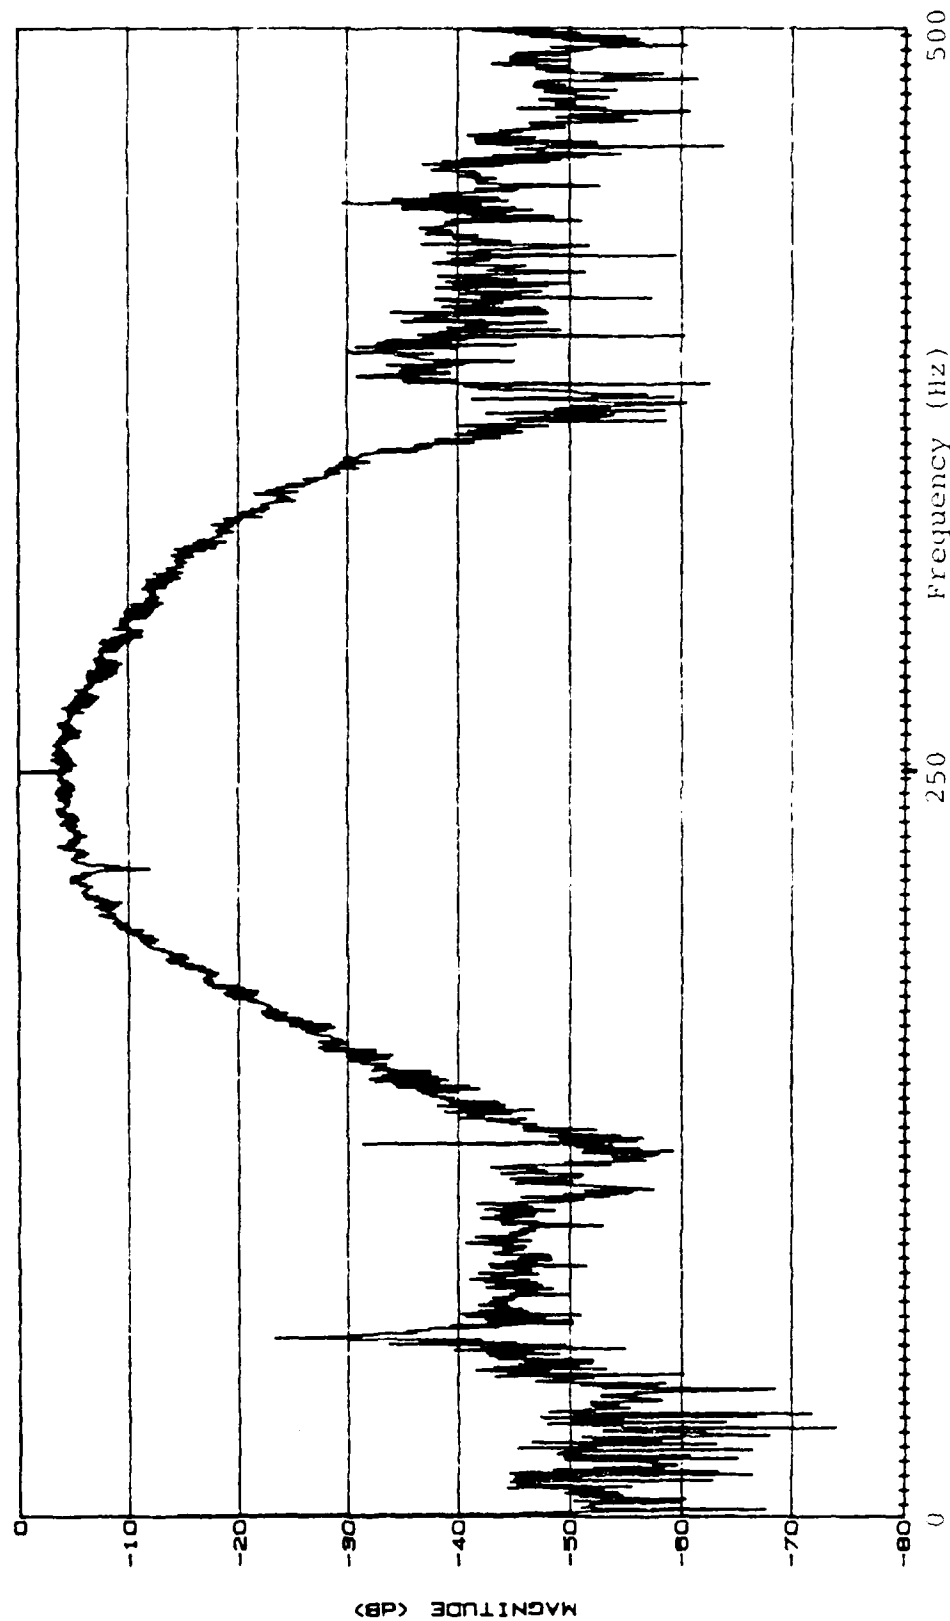

Plot 42. DFT of the two cycle digit response.


Source lowered to 446 feet.

COOLEY ELECTRONICS LABORATORY
 2nd half of data set. Scaled to 5447112
 DATA SET, 10 DATE, 08/28/85 SOURCE, HLF-5 C
 SEQUENCE LAW, 705 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4 SAMPLES/DATA SET, 1020
 LOCATION OF PEAK, 854 MAGNITUDE OF PEAK, 4205080. MEDIAN VALUE, 10912

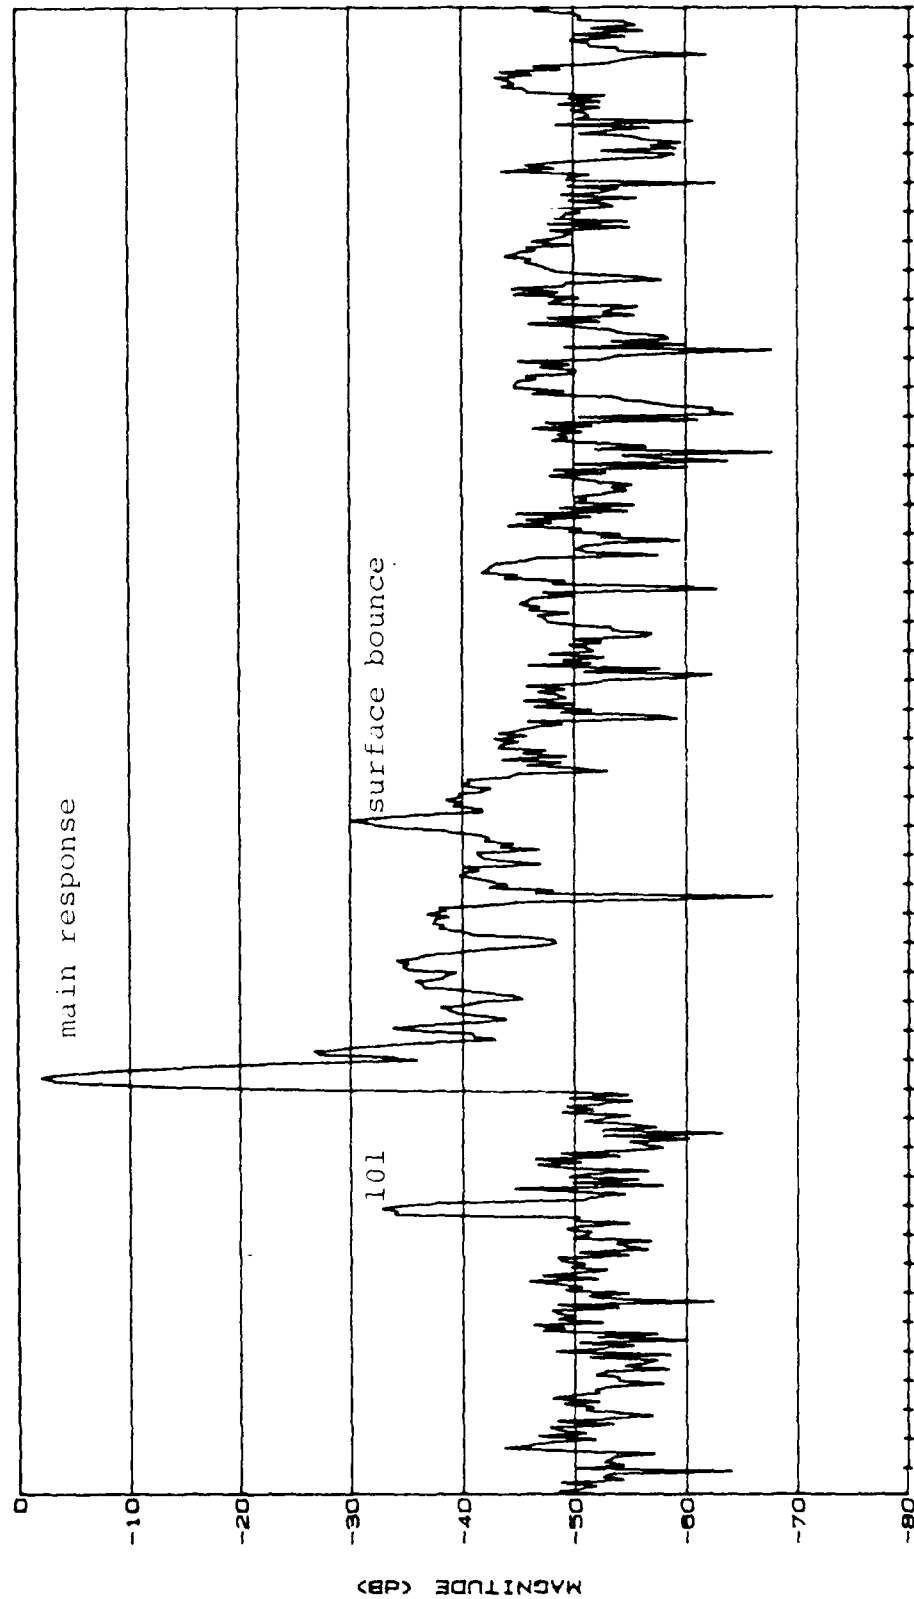

511 CORRELATE 1020
 Plot 43. First half of full period two cycle digit response (dB).
 Source lowered to 446 feet.

COOLEY ELECTRONICS LABORATORY
 1st half of data set. Scaled to 5447112
 DATA SET, 16 DATE, 08/28/85 SOURCE, HLF-5 C
 SEQUENCE LAW, 765 FREQUENCY (Hz), 250
 HALF CYCLES/SAMPLE, 1 SAMPLES/DIGIT, 4 SAMPLES/DATA SET, 1020
 LOCATION OF PEAK, 654 MAGNITUDE OF PEAK, 4205686. MEDIAN VALUE, 16912

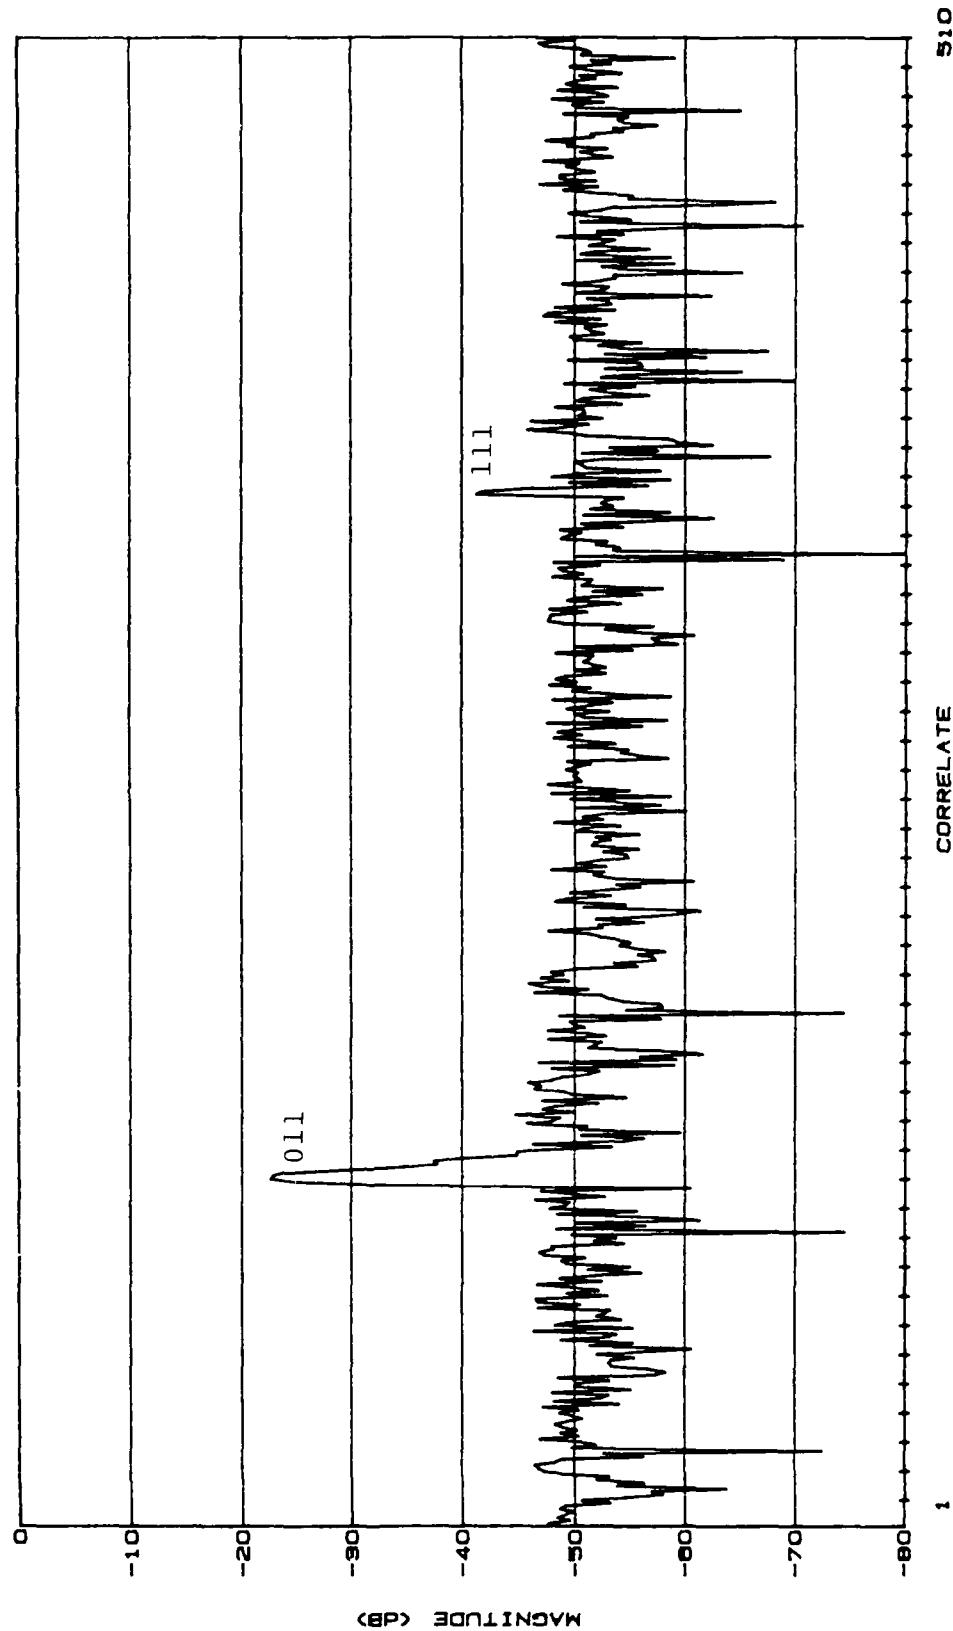

Plot 44. Second half period two cycle digit response (dB).
 Source lowered to 446 feet.

END

12-87

DTIC